



CONTAMINATION CONTROL SOLUTIONS



PASSION TO PERFORM



A WORLDWIDE LEADER IN THE FIELD OF HYDRAULIC FILTRATION EQUIPMENT.

Our company started life in 1964, when Bruno Pasotto decided to attempt to cater for the requests of a market still to be fully explored, with the study, design, development, production and marketing of a vast range of filters for hydraulic equipment, capable of satisfying the needs of manufacturers in all sectors. The quality of our products, our extreme competitiveness compared with major international producers and our constant activities of research, design and development has made us a worldwide leader in the field of hydraulic circuit filtering. Present for over 50 years in the market, we have played a truly decisive role in defining our sector, and by now we are a group capable of controlling our entire chain of production, monitoring all manufacturing processes to guarantee superior quality standards and to provide concrete solutions for the rapidly evolving needs of customers and the market.

CONTAMINATION CONTROL SOLUTIONS



...because contamination costs!

| | | |
|----------|-------------|--------------------------|
| 1 | page | INTRODUCTION |
| 4 | | COMPANY PROFILE |
| 8 | | PRODUCT RANGE |
| 11 | | CONTAMINATION MANAGEMENT |

| | | |
|-----------|----------------------------|--|
| 18 | page | CONTAMINATION MONITORING PRODUCTS |
| 21 | LPA3 | Portable Laser Particle Analyzer |
| 27 | LPA2 Aviation Edition | Twin Laser Particle Analyser |
| 33 | CML4 | Compact Portable Contamination Monitor |
| 39 | ICM 4.0 | In-line Contamination Monitor - WiFi technology integrated |
| 45 | ICM 2.0 | In-line Contamination Monitor |
| 51 | AZ2 | ATEX Fluid Contamination Monitors |
| 57 | ICU | In-line Contamination Monitoring Unit |
| 63 | ACMU | Auxiliary Contamination Monitoring Unit |
| 69 | BS110 & BS500 | Bottle Samplers |
| 78 | HOW SAMPLING | |
| 81 | PIK - Patch Imaging Kit | Patch Sampling and Digital Imaging Kit |
| 84 | FLUID COMPATIBILITY CHARTS | |
| 88 | SPARE PARTS LIST | |
| 93 | ACCESSORIES | |

| | | |
|------------|-------------|---|
| 100 | page | MOBILE FILTRATION UNITS |
| 103 | UFM 015 | Mobile filtration unit 15 l/min flow rate |
| 113 | UFM 041 | Mobile filtration unit 34 l/min flow rate |
| 119 | UFM 051 | Mobile filtration unit 50 l/min flow rate |
| 125 | UFM 091 | Mobile filtration unit 90 l/min flow rate |
| 131 | UFM 181 | Mobile filtration unit 180 l/min flow rate |
| 137 | UFM 919 | Mobile filtration unit 90 l/min and 180 l/min flow rate |
| 143 | FTU 080 | Fluid transfer unit 15 l/min flow rate |

MARKET LEADER



Our work is based on a skillful interaction between advanced technology and fine workmanship, **customizing products according to specific market requests**, focusing strongly on innovation and quality, and following every step in the manufacturing of both standard and special products, fully respecting customer expectations.



Our customer-oriented philosophy, which enables us to satisfy all customer requests **rapidly and with personalized products**, makes us a **dynamic and flexible enterprise**. The possibility of constantly controlling and monitoring the entire production process is essential to allow us to guarantee the quality of our products.

WORLDWIDE PRESENCE

Our foreign Branches enable us to offer a diversified range of products that allow us to successfully face the aggressive challenge of international competition, and also to maintain a stable presence at a local level.

The Group boasts **10** business branches




TECHNOLOGY

Our constant **quest for excellence in quality and technological innovation** allows us to offer only the best solutions and services for applications in many fields, including general industry, test rigs, lubrication, heavy engineering, renewable energies, naval engineering, offshore engineering, aviation systems, emerging technologies and mobile plant (i.e. tractors, excavators, concrete pumps, platforms).



AND PRODUCTION

Our high level of technological expertise means **we can rely entirely on our own resources, without resorting to external providers.** This in turn enables us to satisfy a growing number of customer requests, also exploiting our constantly updated range of machines and equipment, featuring **fully-automated workstations** capable of **24-hour production.**

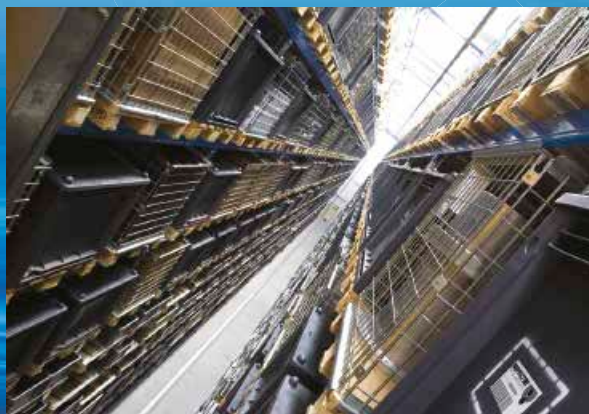



SUCTION FILTERS

Flow rates
up to 875 l/min

Mounting:
- Tank immersed
- In-Line
- In tank with
shut off valve
- In tank
with flooded suction

RETURN FILTERS

Flow rates
up to 3000 l/min

Pressure
up to 20 bar

Mounting:
- In-Line
- Tank top
- In single
and duplex designs

RETURN / SUCTION FILTERS

Flow rates
up to 300 l/min

Pressure
up to 80 bar

Mounting:
- In-Line
- Tank top

SPIN-ON FILTERS

Flow rates
up to 365 l/min

Pressure
up to 35 bar

Mounting:
- In-Line
- Tank top

LOW & MEDIUM PRESSURE FILTERS

Flow rates
up to 3000 l/min

Pressure
up to 80 bar

Mounting:
- In-Line
- Parallel manifold version
- In single
and duplex designs

HIGH PRESSURE FILTERS

Flow rates
up to 750 l/min

Pressure from 110 bar
up to 560 bar

Mounting:
- In-Line
- Manifold
- In single
and duplex designs

PRODUCT RANGE

MP Filtri can offer a vast and articulated range of products for the global market, suitable for all industrial sectors using hydraulic equipment.

This includes filters (suction, return, return/suction, spin-on, pressure, stainless steel pressure, ATEX filters) and structural components (motor/pump bell-housings, transmission couplings, damping rings, foot brackets, aluminium tanks, cleaning covers).

We can provide all the skills and solutions required by the modern hydraulics industry to monitor contamination levels and other fluid conditions.

Mobile filtration units and a full range of accessories allow us to supply everything necessary for a complete service in the hydraulic circuits.



STAINLESS STEEL HIGH PRESSURE FILTERS

Flow rates up to 150 l/min

Pressure from 320 bar up to 1000 bar

- Mounting:
- In-Line
 - Manifold
 - In single and duplex designs

FILTERS FOR POTENTIALLY EXPLOSIVE ATMOSPHERE

Flow rates up to 154 l/min

Pressure from 420 bar up to 1000 bar

- Mounting:
- In-Line

CONTAMINATION CONTROL SOLUTIONS

- Off-line, in-line particle counters
- Off-line bottle sampling products
- Fully calibrated using relevant ISO standards
- A wide range of variants to support fluid types and communication protocols
- Mobile Filtration Units with flow rates from 15 l/min up to 200 l/min

POWER TRANSMISSION PRODUCTS

- Aluminium bell-housings for motors from 0.12 kW to 400 kW
- Couplings in Aluminium Cast Iron - Steel
- Damping rings
- Foot bracket
- Aluminium tanks
- Cleaning covers

TANK ACCESSORIES

- Oil filler and air breather plugs
- Optical and electrical level gauges
- Pressure gauge valve selectors
- Pipe fixing brackets
- Pressure gauges



Contamination management

INDEX

| | Page |
|--|------|
| ① HYDRAULIC FLUIDS | 12 |
| ② FLUIDS CONTAMINATION | 12 |
| ③ EFFECTS OF CONTAMINATION ON HYDRAULIC COMPONENTS | 12 |
| ④ MEASURING THE SOLID CONTAMINATION LEVEL | 13 |
| ⑤ RECOMMENDED CONTAMINATION CLASSES | 16 |
| ⑥ WATER IN HYDRAULIC AND LUBRICATING FLUIDS | 17 |

1 HYDRAULIC FLUIDS

The fluid is the vector that transmits power, energy within an oleodynamic circuit. In addition to transmitting energy through the circuit, it also performs additional functions such as lubrication, protection and cooling of the surfaces.

The classification of fluids used in hydraulic systems is coded in many regulatory references, different Standards.

The most popular classification criterion divides them into the following families:

- MINERAL OILS

Commonly used oil deriving fluids.

- FIRE RESISTANT FLUIDS

Fluids with intrinsic characteristics of incombustibility or high flash point.

- SYNTHETIC FLUIDS

Modified chemical products to obtain specific optimized features.

- ECOLOGICAL FLUIDS

Synthetic or vegetable origin fluids with high biodegradability characteristics.

The choice of fluid for an hydraulic system must take into account several parameters.

These parameters can adversely affect the performance of an hydraulic system, causing delay in the controls, pump cavitation, excessive absorption, excessive temperature rise, efficiency reduction, increased drainage, wear, jam/block or air intake in the plant.

The main properties that characterize hydraulic fluids and affect their choice are:

- DYNAMIC VISCOSITY

It identifies the fluid's resistance to sliding due to the impact of the particles forming it.

- KINEMATIC VISCOSITY

It is a widespread formal dimension in the hydraulic field.

It is calculated with the ratio between the dynamic viscosity and the fluid density.

Kinematic viscosity varies with temperature and pressure variations.

- VISCOSITY INDEX

This value expresses the ability of a fluid to maintain viscosity when the temperature changes.

A high viscosity index indicates the fluid's ability to limit viscosity variations by varying the temperature.

- FILTERABILITY INDEX

It is the value that indicates the ability of a fluid to cross the filter materials. A low filterability index could cause premature clogging of the filter material.

- WORKING TEMPERATURE

Working temperature affects the fundamental characteristics of the fluid. As already seen, some fluid characteristics, such as cinematic viscosity, vary with the temperature variation.

When choosing a hydraulic oil, must therefore be taken into account of the environmental conditions in which the machine will operate.

- COMPRESSIBILITY MODULE

Every fluid subjected to a pressure contracts, increasing its density.

The compressibility module identifies the increase in pressure required to cause a corresponding increase in density.

- HYDROLYTIC STABILITY

It is the characteristic that prevents galvanic pairs that can cause wear in the plant/system.

- ANTIOXIDANT STABILITY AND WEAR PROTECTION

These features translate into the capacity of a hydraulic oil to avoid corrosion of metal elements inside the system.

- HEAT TRANSFER CAPACITY

It is the characteristic that indicates the capacity of hydraulic oil to exchange heat with the surfaces and then cool them.

2 FLUID CONTAMINATION

Whatever the nature and properties of fluids, they are inevitably subject to contamination. Fluid contamination can have two origins:

- INITIAL CONTAMINATION

Caused by the introduction of contaminated fluid into the circuit, or by incorrect storage, transport or transfer operations.

- PROGRESSIVE CONTAMINATION

Caused by factors related to the operation of the system, such as metal surface wear, sealing wear, oxidation or degradation of the fluid, the introduction of contaminants during maintenance, corrosion due to chemical or electrochemical action between fluid and components, cavitation. The contamination of hydraulic systems can be of different nature:

- SOLID CONTAMINATION

For example rust, slag, metal particles, fibers, rubber particles, paint particles or additives

- LIQUID CONTAMINATION

For example, the presence of water due to condensation or external infiltration or acids

- GASEOUS CONTAMINATION

For example, the presence of air due to inadequate oil level in the tank, drainage in suction ducts, incorrect sizing of tubes or tanks.

3 EFFECTS OF CONTAMINATION ON HYDRAULIC COMPONENTS

Solid contamination is recognized as the main cause of malfunction, failure and early degradation in hydraulic systems. It is impossible to delete it completely, but it can be effectively controlled by appropriate devices.

CONTAMINATION IN PRESENCE OF LARGE TOLERANCES




CONTAMINATION IN PRESENCE OF NARROW TOLERANCES



Solid contamination mainly causes surface damage and component wear.

- SURFACE EROSION
Cause of leakage through mechanical seals, reduction of system performance, variation in adjustment of control components, failures.
- ADHESION OF MOVING PARTS
Cause of failure due to lack of lubrication.
- DAMAGES DUE TO FATIGUE
Cause of breakdowns and components breakdown.

- MODIFICATION OF FLUID PROPERTIES
(COMPRESSIBILITY MODULE, DENSITY, VISCOSITY)
Cause of system's reduction of efficiency and of control.
It is easy to understand how a system without proper contamination management is subject to higher costs than a system that is provided.
- MAINTENANCE
Maintenance activities, spare parts, machine stop costs
- ENERGY AND EFFICIENCY
Efficiency and performance reduction due to friction, drainage, cavitation.

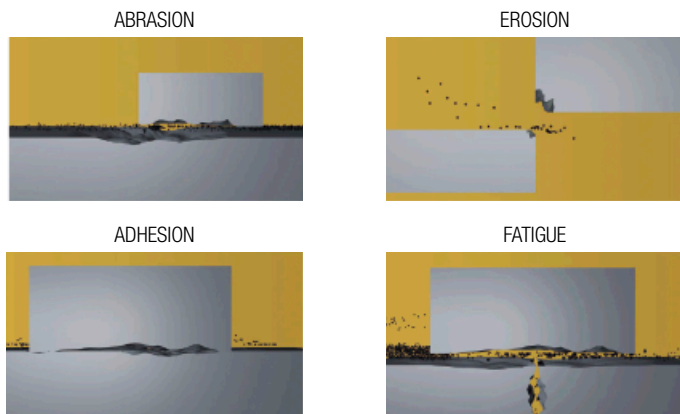

Liquid contamination mainly results in decay of lubrication performance and protection of fluid surfaces.

DISSOLVED WATER

- INCREASING FLUID ACIDITY
Cause of surface corrosion and premature fluid oxidation
- GALVANIC COUPLE AT HIGH TEMPERATURES
Cause of corrosion

FREE WATER - ADDITIONAL EFFECTS

- DECAY OF LUBRICANT PERFORMANCE
Cause of rust and sludge formation, metal corrosion and increased solid contamination
- BATTERY COLONY CREATION
Cause of worsening in the filterability feature
- ICE CREATION AT LOW TEMPERATURES
Cause damage to the surface
- ADDITIVE DEPLETION
Free water retains polar additives

Gaseous contamination mainly results in decay of system performance.

- CUSHION SUSPENSION
Cause of increased noise and cavitation.
- FLUID OXIDATION
Cause of corrosion acceleration of metal parts.


4 MEASURING THE SOLID CONTAMINATION LEVEL

The level of contamination of a system identifies the amount of contaminant contained in a fluid.

This parameter refers to a unit volume of fluid.

The level of contamination may be different at different points in the system. From the information in the previous paragraphs it is also apparent that the level of contamination is heavily influenced by the working conditions of the system, by its working years and by the environmental conditions.

What is the size of the contaminating particles that we must handle in our hydraulic circuit?

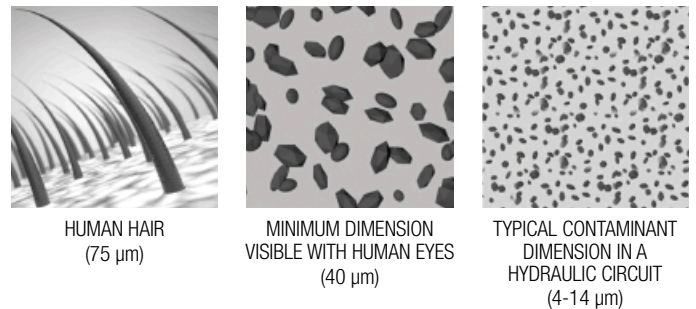


Contamination level analysis is significant only if performed with a uniform and repeatable method, conducted with standard test methods and suitably calibrated equipment.

To this end, ISO has issued a set of standards that allow tests to be conducted and express the measured values in the following ways.

- GRAVIMETRIC LEVEL - ISO 4405

The level of contamination is defined by checking the weight of particles collected by a laboratory membrane. The membrane must be cleaned, dried and desiccated, with fluid and conditions defined by the Standard.

The volume of fluid is filtered through the membrane by using a suitable suction system. The weight of the contaminant is determined by checking the weight of the membrane before and after the fluid filtration.

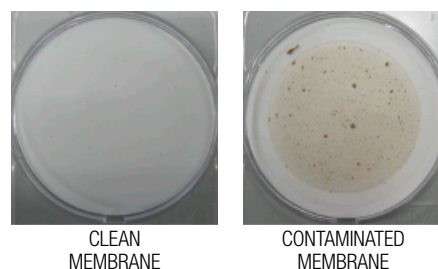

CONTAMINATION MANAGEMENT

- CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - ISO 4406

The level of contamination is defined by counting the number of particles of certain dimensions per unit of volume of fluid. Measurement is performed by Automatic Particle Counters (APC).

Following the count, the contamination classes are determined, corresponding to the number of particles detected in the unit of fluid.

The most common classification methods follow ISO 4406 and SAE AS 4059 (Aerospace Sector) regulations.

NAS 1638 is still used although obsolete.

Classification example according to ISO 4406

The International Standards Organisation standard ISO 4406 is the preferred method of quoting the number of solid contaminant particles in a sample.

The code is constructed from the combination of three scale numbers selected from the following table.

The first number represents the number of particles that are larger than $4 \mu\text{m}_{(c)}$.

The second number represents the number of particles larger than $6 \mu\text{m}_{(c)}$.

The third scale number represents the number of particles in a millilitre sample of the fluid that are larger than $14 \mu\text{m}_{(c)}$.

ISO 4406 - Allocation of Scale Numbers


| Class | Number of particles per ml | |
|-------|----------------------------|-----------|
| | Over | Up to |
| 28 | 1 300 000 | 2 500 000 |
| 27 | 640 000 | 1 300 000 |
| 26 | 320 000 | 640 000 |
| 25 | 160 000 | 320 000 |
| 24 | 80 000 | 160 000 |
| 23 | 40 000 | 80 000 |
| 22 | 20 000 | 40 000 |
| 21 | 10 000 | 20 000 |
| 20 | 5 000 | 10 000 |
| 19 | 2 500 | 5 000 |
| 18 | 1 300 | 2 500 |
| 17 | 640 | 1 300 |
| 16 | 320 | 640 |
| 15 | 160 | 320 |
| 14 | 80 | 160 |
| 13 | 40 | 80 |
| 12 | 20 | 40 |
| 11 | 10 | 20 |
| 10 | 5 | 10 |
| 9 | 2.5 | 5 |
| 8 | 1.3 | 2.5 |
| 7 | 0.64 | 1.3 |
| 6 | 0.32 | 0.64 |
| 5 | 0.16 | 0.32 |
| 4 | 0.08 | 0.16 |
| 3 | 0.04 | 0.08 |
| 2 | 0.02 | 0.04 |
| 1 | 0.01 | 0.02 |
| 0 | 0 | 0.01 |

| |
|---|
| > $4 \mu\text{m}_{(c)}$ = 350 particles |
| > $6 \mu\text{m}_{(c)}$ = 100 particles |
| > $14 \mu\text{m}_{(c)}$ = 25 particles |
| 16 / 14 / 12 |

ISO 4406 Cleanliness Code System

Microscope counting examines the particles differently to APCs and the code is given with two scale numbers only.

These are at $5 \mu\text{m}$ and $15 \mu\text{m}$ equivalent to the $6 \mu\text{m}_{(c)}$ and $14 \mu\text{m}_{(c)}$ of APCs.

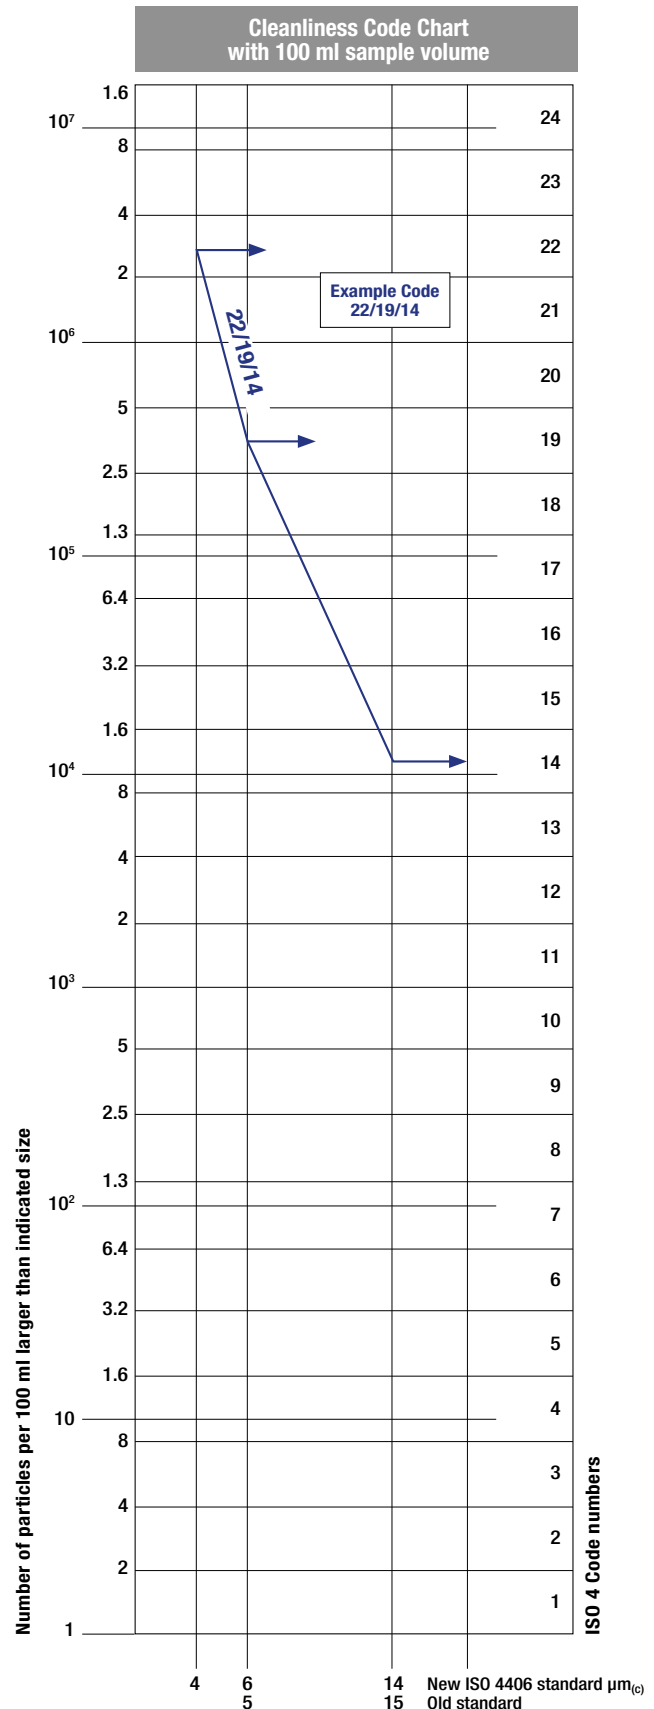

- CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - SAE AS 4059-1 and SAE AS 4059-2

Classification example according to

SAE AS4059 - Rev. E and SAE AS4059-2 - Rev. F

The code, prepared for the aerospace industry, is based on the size, quantity, and particle spacing in a 100 ml fluid sample. The contamination classes are defined by numeric codes, the size of the contaminant is identified by letters (A-F).

SAE AS4059 - REV. E

It can be made a differential measurement (Table 1) or a cumulative measurement (Table 2)

Table 1 - Class for differential measurement

| Class | Dimension of contaminant Maximum Contamination Limits per 100 ml | | | | |
|-------|---|---------------------------|---------------------------|---------------------------|-------------------------|
| | 6-14 $\mu\text{m}_{(c)}$ | 14-21 $\mu\text{m}_{(c)}$ | 21-38 $\mu\text{m}_{(c)}$ | 38-70 $\mu\text{m}_{(c)}$ | >70 $\mu\text{m}_{(c)}$ |
| 00 | 125 | 22 | 4 | 1 | 0 |
| 0 | 250 | 44 | 8 | 2 | 0 |
| 1 | 500 | 89 | 16 | 3 | 1 |
| 2 | 1 000 | 178 | 32 | 6 | 1 |
| 3 | 2 000 | 356 | 63 | 11 | 2 |
| 4 | 4 000 | 712 | 126 | 22 | 4 |
| 5 | 8 000 | 1 425 | 253 | 45 | 8 |
| 6 | 16 000 | 2 850 | 506 | 90 | 16 |
| 7 | 32 000 | 5 700 | 1 012 | 180 | 32 |
| 8 | 64 000 | 11 400 | 2 025 | 360 | 64 |
| 9 | 128 000 | 22 800 | 4 050 | 720 | 128 |
| 10 | 256 000 | 45 600 | 8 100 | 1 440 | 256 |
| 11 | 512 000 | 91 200 | 16 200 | 2 880 | 512 |
| 12 | 1 024 000 | 182 400 | 32 400 | 5 760 | 1 024 |

| |
|---|
| 6 - 14 $\mu\text{m}_{(c)}$ = 15 000 particles |
| 14 - 21 $\mu\text{m}_{(c)}$ = 2 200 particles |
| 21 - 38 $\mu\text{m}_{(c)}$ = 200 particles |
| 38 - 70 $\mu\text{m}_{(c)}$ = 35 particles |
| > 70 $\mu\text{m}_{(c)}$ = 3 particles |
| SAE AS4059 REV E - Class 6 |

Table 2 - Class for cumulative measurement

| Class | Dimension of contaminant Maximum Contamination Limits per 100 ml | | | | | |
|-------|---|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | >4 $\mu\text{m}_{(c)}$ | >6 $\mu\text{m}_{(c)}$ | >14 $\mu\text{m}_{(c)}$ | >21 $\mu\text{m}_{(c)}$ | >38 $\mu\text{m}_{(c)}$ | >70 $\mu\text{m}_{(c)}$ |
| 000 | 195 | 76 | 14 | 3 | 1 | 0 |
| 00 | 390 | 152 | 27 | 5 | 1 | 0 |
| 0 | 780 | 304 | 54 | 10 | 2 | 0 |
| 1 | 1 560 | 609 | 109 | 20 | 4 | 1 |
| 2 | 3 120 | 1 217 | 217 | 39 | 7 | 1 |
| 3 | 6 250 | 2 432 | 432 | 76 | 13 | 2 |
| 4 | 12 500 | 4 864 | 864 | 152 | 26 | 4 |
| 5 | 25 000 | 9 731 | 1 731 | 306 | 53 | 8 |
| 6 | 50 000 | 19 462 | 3 462 | 612 | 106 | 16 |
| 7 | 100 000 | 38 924 | 6 924 | 1 224 | 212 | 32 |
| 8 | 200 000 | 77 849 | 13 849 | 2 449 | 424 | 64 |
| 9 | 400 000 | 155 698 | 27 698 | 4 898 | 848 | 128 |
| 10 | 800 000 | 311 396 | 55 396 | 9 796 | 1 696 | 256 |
| 11 | 1 600 000 | 622 792 | 110 792 | 19 592 | 3 392 | 512 |
| 12 | 3 200 000 | 1 245 584 | 221 584 | 39 184 | 6 784 | 1 024 |

| |
|--|
| > 4 $\mu\text{m}_{(c)}$ = 45 000 particles |
| > 6 $\mu\text{m}_{(c)}$ = 15 000 particles |
| > 14 $\mu\text{m}_{(c)}$ = 1 500 particles |
| > 21 $\mu\text{m}_{(c)}$ = 250 particles |
| > 38 $\mu\text{m}_{(c)}$ = 15 particles |
| > 70 $\mu\text{m}_{(c)}$ = 3 particle |
| SAE AS4059 REV E 6A/6B/5C/5D/4E/2F |

The information reproduced on this page is a brief extract from SAE AS4059 Rev.E, revised in May 2005. For further details and explanations refer to the full Standard.

SAE AS4059 - REV. F

It can be made a differential measurement (Table 1) or a cumulative measurement (Table 2)

Table 1 - Class for differential measurement

| Class | Dimension of contaminant Maximum Contamination Limits per 100 ml | | | | |
|-------|---|---------------------------|---------------------------|---------------------------|-------------------------|
| | 5-15 μm | 15-25 μm | 25-50 μm | 50-100 μm | >100 μm |
| | 6-14 $\mu\text{m}_{(c)}$ | 14-21 $\mu\text{m}_{(c)}$ | 21-38 $\mu\text{m}_{(c)}$ | 38-70 $\mu\text{m}_{(c)}$ | >70 $\mu\text{m}_{(c)}$ |
| 00 | 125 | 22 | 4 | 1 | 0 |
| 0 | 250 | 44 | 8 | 2 | 0 |
| 1 | 500 | 89 | 16 | 3 | 1 |
| 2 | 1 000 | 178 | 32 | 6 | 1 |
| 3 | 2 000 | 356 | 63 | 11 | 2 |
| 4 | 4 000 | 712 | 126 | 22 | 4 |
| 5 | 8 000 | 1 425 | 253 | 45 | 8 |
| 6 | 16 000 | 2 850 | 506 | 90 | 16 |
| 7 | 32 000 | 5 700 | 1 012 | 180 | 32 |
| 8 | 64 000 | 11 400 | 2 025 | 360 | 64 |
| 9 | 128 000 | 22 800 | 4 050 | 720 | 128 |
| 10 | 256 000 | 45 600 | 8 100 | 1 440 | 256 |
| 11 | 512 000 | 91 200 | 16 200 | 2 880 | 512 |
| 12 | 1 024 000 | 182 400 | 32 400 | 5 760 | 1 024 |

| |
|---|
| 6 - 14 $\mu\text{m}_{(c)}$ = 15 000 particles |
| 14 - 21 $\mu\text{m}_{(c)}$ = 2 200 particles |
| 21 - 38 $\mu\text{m}_{(c)}$ = 200 particles |
| 38 - 70 $\mu\text{m}_{(c)}$ = 35 particles |
| > 70 $\mu\text{m}_{(c)}$ = 3 particles |
| SAE AS4059 REV F - Class 6 |

- (1) Size range, microscope particle counts, based on longest dimension as measured per AS598 or ISO 4407.
- (2) Size range, APC calibrated per ISO 11171 or an optical or electron microscope with image analysis software, based on projected area equivalent diameter.
- (3) Contamination classes and particle count limits are identical to NAS 1638.

Table 2 - Class for cumulative measurement

| Class | Dimension of contaminant Maximum Contamination Limits per 100 ml | | | | | |
|-------|---|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | >1 μm | >5 μm | >15 μm | >25 μm | >50 μm | >100 μm |
| | >4 $\mu\text{m}_{(c)}$ | >6 $\mu\text{m}_{(c)}$ | >14 $\mu\text{m}_{(c)}$ | >21 $\mu\text{m}_{(c)}$ | >38 $\mu\text{m}_{(c)}$ | >70 $\mu\text{m}_{(c)}$ |
| 000 | 195 | 76 | 14 | 3 | 1 | 0 |
| 00 | 390 | 152 | 27 | 5 | 1 | 0 |
| 0 | 780 | 304 | 54 | 10 | 2 | 0 |
| 1 | 1 560 | 609 | 109 | 20 | 4 | 1 |
| 2 | 3 120 | 1 217 | 217 | 39 | 7 | 1 |
| 3 | 6 250 | 2 432 | 432 | 76 | 13 | 2 |
| 4 | 12 500 | 4 864 | 864 | 152 | 26 | 4 |
| 5 | 25 000 | 9 731 | 1 731 | 306 | 53 | 8 |
| 6 | 50 000 | 19 462 | 3 462 | 612 | 106 | 16 |
| 7 | 100 000 | 38 924 | 6 924 | 1 224 | 212 | 32 |
| 8 | 200 000 | 77 849 | 13 849 | 2 449 | 424 | 64 |
| 9 | 400 000 | 155 698 | 27 698 | 4 898 | 848 | 128 |
| 10 | 800 000 | 311 396 | 55 396 | 9 796 | 1 696 | 256 |
| 11 | 1 600 000 | 622 792 | 110 792 | 19 592 | 3 392 | 512 |
| 12 | 3 200 000 | 1 245 584 | 221 584 | 39 184 | 6 784 | 1 024 |

| |
|--|
| > 4 $\mu\text{m}_{(c)}$ = 45 000 particles |
| > 6 $\mu\text{m}_{(c)}$ = 15 000 particles |
| > 14 $\mu\text{m}_{(c)}$ = 1 500 particles |
| > 21 $\mu\text{m}_{(c)}$ = 250 particles |
| > 38 $\mu\text{m}_{(c)}$ = 15 particles |
| > 70 $\mu\text{m}_{(c)}$ = 3 particle |
| SAE AS4059 REV F cpc* Class 6 G/6/5/5/4/2 |

* cumulative particle count

- (1) Size range, optical microscope, based on longest dimension as measured per AS598 or ISO 4407.
- (2) Size range, APC calibrated per ISO 11171 or an optical or electron microscope with image analysis software, based on projected area equivalent diameter.

CONTAMINATION MANAGEMENT

- CLASSES OF CONTAMINATION ACCORDING TO NAS 1638 (January 1964)

The NAS system was originally developed in 1964 to define contamination classes for the contamination contained within aircraft components.

The application of this standard was extended to industrial hydraulic systems simply because nothing else existed at the time.

The coding system defines the maximum numbers permitted of 100 ml volume at various size intervals (differential counts) rather than using cumulative counts as in ISO 4406. Although there is no guidance given in the standard on how to quote the levels, most industrial users quote a single code which is the highest recorded in all sizes and this convention is used on MP Filtri APC's.

The contamination classes are defined by a number (from 00 to 12) which indicates the maximum number of particles per 100 ml, counted on a differential basis, in a given size bracket.

Size Range Classes (in microns)

| Maximum Contamination Limits per 100 ml | | | | | |
|---|-----------|---------|--------|--------|-------|
| Class | 5-15 | 15-25 | 25-50 | 50-100 | >100 |
| 00 | 125 | 22 | 4 | 1 | 0 |
| 0 | 250 | 44 | 8 | 2 | 0 |
| 1 | 500 | 89 | 16 | 3 | 1 |
| 2 | 1 000 | 178 | 32 | 6 | 1 |
| 3 | 2 000 | 356 | 63 | 11 | 2 |
| 4 | 4 000 | 712 | 126 | 22 | 4 |
| 5 | 8 000 | 1 425 | 253 | 45 | 8 |
| 6 | 16 000 | 2 850 | 506 | 90 | 16 |
| 7 | 32 000 | 5 700 | 1 012 | 180 | 32 |
| 8 | 64 000 | 11 400 | 2 025 | 360 | 64 |
| 9 | 128 000 | 22 800 | 4 050 | 720 | 128 |
| 10 | 256 000 | 45 600 | 8 100 | 1 440 | 256 |
| 11 | 512 000 | 91 200 | 16 200 | 2 880 | 512 |
| 12 | 1 024 000 | 182 400 | 32 400 | 5 760 | 1 024 |

| |
|------------------------------|
| 5 - 15 µm = 42 000 particles |
| 15 - 25 µm = 2 200 particles |
| 25 - 50 µm = 150 particles |
| 50 - 100 µm = 18 particles |
| > 100 µm = 3 particles |
| Class NAS 8 |

- CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - ISO 4407

The level of contamination is defined by counting the number of particles collected by a laboratory membrane per unit of fluid volume. The measurement is done by a microscope. The membrane must be cleaned, dried and desiccated, with fluid and conditions defined by the Standard. The fluid volume is filtered through the membrane, using a suitable suction system.

The level of contamination is identified by dividing the membrane into a predefined number of areas and by counting the contaminant particles using a suitable laboratory microscope.

MICROSCOPE CONTROL AND MEASUREMENT



Example figure 1 and 2

ISO 4406
SAE AS4059E Table 1
NAS 1638
SAE AS4059E Table 2

COMPARISON PHOTOGRAPH'S
1 graduation = 10µm

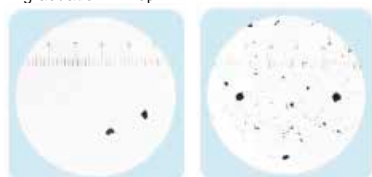


Fig. 1

Fig. 2

Class 16/14/11
Class 5
Class 5
Class 6A/5B/5C

Class 22/20/17
Class 11
Class 11
Class 12A/11B/11C

For other comparison photographs for contamination classes see the "Fluid Condition and Filtration Handbook".

- CLEANLINESS CODE COMPARISON

Although ISO 4406 standard is being used extensively within the hydraulics industry other standards are occasionally required and a comparison may be requested. The table below gives a very general comparison but often no direct comparison is possible due to the different classes and sizes involved.

| ISO 4406 | SAE AS4059 Table 2 | SAE AS4059 Table 1 | NAS 1638 |
|--|--|---|--|
| > 4 µm _(c) 6 µm _(c) 14 µm _(c) | > 4 µm _(c) 6 µm _(c) 14 µm _(c) | 4-6 6-14 14-21 21-38 38-70 >70 | 5-15 15-25 25-50 50-100 >100 |
| 23 / 21 / 18 | 13A / 12B / 12C | 12 | 12 |
| 22 / 20 / 17 | 12A / 11B / 11C | 11 | 11 |
| 21 / 19 / 16 | 11A / 10B / 10C | 10 | 10 |
| 20 / 18 / 15 | 10A / 9B / 9C | 9 | 9 |
| 19 / 17 / 14 | 9A / 8B / 8C | 8 | 8 |
| 18 / 16 / 13 | 8A / 7B / 7C | 7 | 7 |
| 17 / 15 / 12 | 7A / 6B / 6C | 6 | 6 |
| 16 / 14 / 11 | 6A / 5B / 5C | 5 | 5 |
| 15 / 13 / 10 | 5A / 4B / 4C | 4 | 4 |
| 14 / 12 / 09 | 4A / 3B / 3C | 3 | 3 |

5 RECOMMENDED CONTAMINATION CLASSES

The table below, gives a selection of maximum contamination levels that are typically issued by component manufacturer.

These relate to the use of the correct viscosity mineral fluid. An even cleaner level may be needed if the operation

is severe, such as high frequency fluctuations in loading, high temperature or high failure risk.

| | | | | | | |
|---|--------------------------|--------------------------|--------------------------|-------------------------|-------------------------|-------------------------|
| Piston pumps with fixed flow rate | • | | | | | |
| Piston pumps with variable flow rate | | | • | | | |
| Vane pumps with fixed flow rate | | • | | | | |
| Vane pumps with variable flow | | | • | | | |
| Engines | • | | | | | |
| Hydraulic cylinders | • | | | | | |
| Actuators | | | | | • | |
| Test benches | | | | | | • |
| Check valve | • | | | | | |
| Directional valves | • | | | | | |
| Flow regulating valves | • | | | | | |
| Proportional valves | | | | • | | |
| Servo-valves | | | | | • | |
| Flat bearings | | | • | | | |
| Ball bearings | | | | • | | |
| ISO 4406 CODE | 20/18/15 | 19/17/14 | 18/16/13 | 17/15/12 | 16/14/11 | 15/13/10 |
| Recommended filtration β _{x(c)} ≥1.000 | β _{20(c)} >1000 | β _{15(c)} >1000 | β _{10(c)} >1000 | β _{7(c)} >1000 | β _{7(c)} >1000 | β _{5(c)} >1000 |


6 WATER IN HYDRAULIC AND LUBRICATING FLUIDS

Water Content

In mineral oils and non aqueous resistant fluids water is undesirable. Mineral oil usually has a water content of 50-300 ppm (@40°C) which it can support without adverse consequences.

Once the water content exceeds about 300 ppm the oil starts to appear hazy. Above this level there is a danger of free water accumulating in the system in areas of low flow. This can lead to corrosion and accelerated wear.

Similarly, fire resistant fluids have a natural water which may be different to mineral oil.

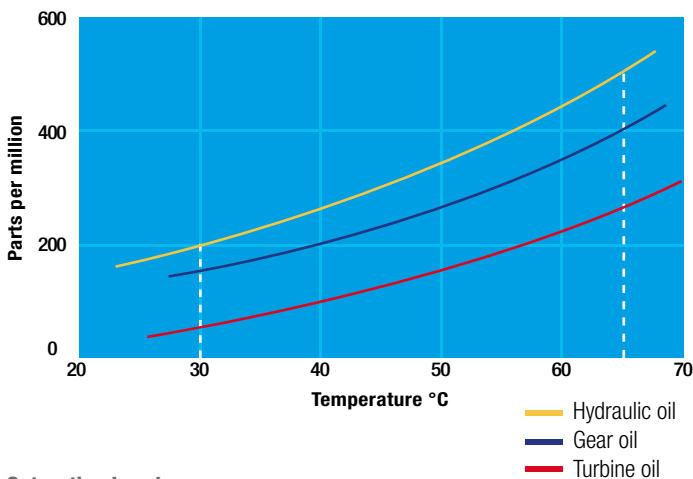

Saturation Levels

Since the effects of free (also emulsified) water is more harmful than those of dissolved water, water levels should remain well below the saturation point.


However, even water in solution can cause damage and therefore every reasonable effort should be made to keep saturation levels as low as possible. There is no such thing as too little water. As a guideline, we recommend maintaining saturation levels below 50% in all equipment.

TYPICAL WATER SATURATION LEVEL FOR NEW OILS

Examples:

Hydraulic oil @ 30°C = 200 ppm = 100% saturation

Hydraulic oil @ 65°C = 500 ppm = 100% saturation

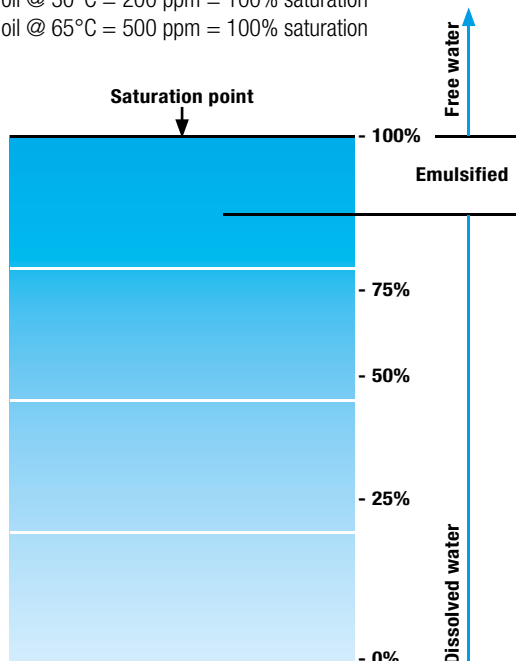

W - Water and Temperature Sensing

“W” option, in MP Filtri Contamination Monitoring Products, indicates water content as a percentage of saturation and oil temperature in degrees centigrade. 100% RH corresponds to the point at which free water can exist in the fluid. i.e. the fluid is no longer able to hold the water in a dissolved solution.

The sensor can help provide early indication of costly failure due to free water, including but not exclusive to corrosion, metal surface fatigue e.g. bearing failure, reduced lubrication & load carrying characteristics.

Different oils have different saturation levels and therefore RH (relative humidity) % is the best and most practical measurement.



Water absorber

Water is present everywhere, during storage, handling and servicing.

MP Filtri filter elements feature an absorbent media which protects hydraulic systems from both particulate and water contamination.

MP Filtri’s filter element technology is available with inorganic microfiber media with a filtration rating 25 µm (therefore identified with media designation WA025, providing absolute filtration of solid particles to $\beta_{X(c)} = 1000$).

Absorbent media is made by water absorbent fibres which increase in size during the absorption process. Free water is thus bonded to the filter media and completely removed from the system (it cannot even be squeezed out).

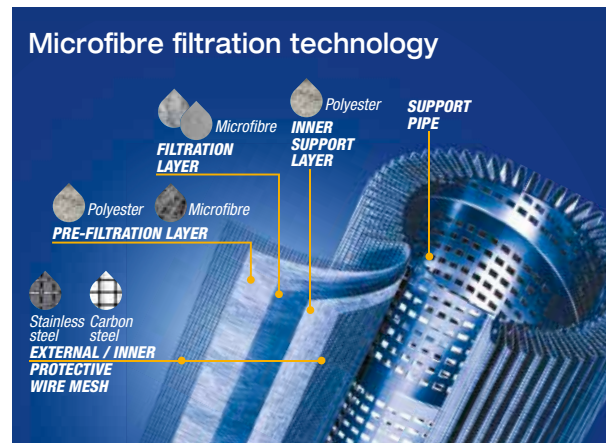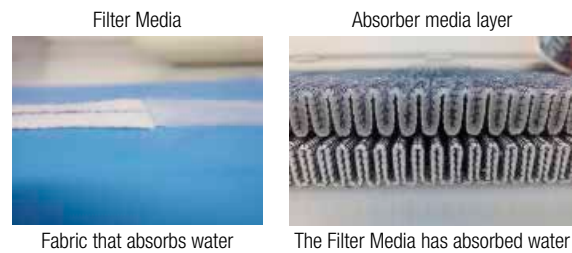

By removing water from your fluid power system, you can prevent such key problems as:

- corrosion (metal etching)
- loss of lubricant power
- accelerated abrasive wear in hydraulic components
- valve-locking
- bearing fatigue
- viscosity variance (reduction in lubricating properties)
- additive precipitation and oil oxidation
- increase in acidity level
- increased electrical conductivity (loss of dielectric strength)
- slow/weak response of control systems

Product availability - UFM Series:

UFM 041 - UFM 051 - UFM 091 - UFM 181 - UFM 919

You can see right through our results

It's no secret the presence of particles in the hydraulic fluid is the primary cause of failure, unreliability and short component life in hydraulic systems - whether they be fluid power, lubrication or fuel. We have developed an extensive range of products to help you safeguard your machines and systems from potential failure.

Benefits:

- **Promptly measures and maintains the appropriate fluid cleanliness level**
- **Damages and downtime are minimised, reducing costs**
- **Provides a maintenance regime to immediately respond to an incident**

Applications:

- **Industrial hydraulic and lubrication systems**
- **Mobile hydraulics**

Contamination Monitoring Products

LPA3



LPA2 Aviation Edition



CML4



Portable Particle Counters

ICM 4.0



ICM 2.0



AZ2



ICU



ACMU



Inline Contamination Monitors





Sampling Analysis Kit **BS110 & BS500** **PIK**

| | | | |
|-------------------------|------|----|---|
| LPA3 | page | 21 | |
| LPA2 Aviation Edition | 27 | | |
| CML4 | 33 | | |
| ICM 4.0 | 39 | | |
| ICM 2.0 | 45 | | |
| AZ2 | 51 | | |
| ICU | 57 | | |
| ACMU | 63 | | |
| BS110 & BS500 | 69 | | |
| HOW SAMPLING | 78 | | |
| PIK - Patch Imaging Kit | 81 | | |
| | | | FLUID COMPATIBILITY CHARTS page 85 |
| | | | SPARE PARTS LIST 88 |
| | | | ACCESSORIES 93 |

LPA3

Portable Laser Particle Analyzer




Description

Contamination Monitoring Products

Portable Laser Particle Analyzer

MP Filtri's new LPA3 is the most advanced portable particle counter in the world. Whether you are working in the lab or in the field, the LPA3 delivers a fast, accurate and comprehensive hydraulic health check in a robust yet portable package.

Its real-time monitoring and predictive maintenance technology safeguards machinery, enhances performance and productivity, and reduces costs and unplanned downtime. Featuring the latest breakthroughs in optical and photodiode technology, the new LPA3 enhances the reliability and longevity of complex hydraulic systems and is ideal for quality control in in-house manufacturing applications. The LPA3 is compatible with the full range of Bottle Samplers.



> Features & Benefits

- Online/realtime monitoring
- Comprehensive hydraulic health check
- Proactive maintenance capabilities
- High-speed sample times
- Programmable 10.1" (25.6cm) touchscreen display
- Perfectly portable at just 10kg
- Programmable sample volumes
- Precision Instrument
- Live trend analysis option
- Measures and displays the following international standard formats; ISO 4406, NAS 1638, AS 4059E&F, GBT 14039, GJB420B
- Moisture and temperature sensing
- Data logging and enhanced 4000 test result memory
- Key performance information at a glance
- LPA View software (included)
- Ideal for hydraulic, lubrication, and subsea fluids
- Integrated printer
- Full accessories kit included
- Long-life Lithium Ion battery

Scope of Supply

- 1 x LPA3 (*)
- 1 x M16x2 microbore pressure hose, 1500 mm long, pouch
- 1 x 2000 mm quick release waste hose for LPA3 and pouch
- 1 x 1L waste receptacle
- 1 x Power Lead c/w UK/EU/US/AUS/CN heads
- 1 x USB cable
- 1 x Digital USB copy of user guides/software/drivers
- 2 x Hard copy of calibration certificate
- 5 x Thermal printer paper
- 1 x Carry bag

(*) Specific model will be as per ordered item

See Accessories at page 93



Front facing view



Right facing view



Closed case
Front facing view



Closed case
Side view

Technical data

Technology

High precision LED light extinction automatic optical particle counter

Particle Sizing

>4, 6, 14, 21, 25, 38, 50, 70 $\mu\text{m}_{(c)}$

Analysis range

ISO 4406 Codes 8 to 24

NAS 1638 Class 2 to 12

AS4059/ISO 11218 Rev E, Table 1 Size Codes 2-12

AS4059/ISO 11218 Rev E, Table 2 Size Codes, A: 000 TO 12, B: 00 to 12,

C: 00 to 12, D: 2 to 12, E: 4-12, F: 7 to 12

AS4059 Rev F, Table 1 Size Codes 2-12

AS4059 Rev F, Table 2 Size Codes cpc

[000 to 12, 00 to 12, 00 to 12, 2 to 12, 4 to 12, 7 to 12]

GBT14039 Codes 8-24

GJB420B Size Codes, A: 000 to 12, B: 00 to 12, C: 00 to 12,

D: 2 to 12, E: 4-12, F: 7 to 12

Please Note: Lower Limits are Test Volume dependent

Accuracy

$\pm 1/2$ ISO code for 4, 6, 14 $\mu\text{m}_{(c)}$

± 1 code for 21, 25, 38, 50, 70 $\mu\text{m}_{(c)}$

Calibration

Individually calibrated with ISO Medium Test Dust (MTD)

based on ISO 11171, on equipment certified by I.F.T.S to ISO 11943

Viscosity range

Up to 400 cSt

Fluid temperature

Minimum: +5 °C

Maximum: +80 °C

Ambient temperature

Minimum: -10 °C

Maximum: +80 °C

Pressure

Minimum: 2.0 bar / 29 psi

Maximum: 420 bar / 6092 psi static

Sample Volume

Maximum 100 ml / 3.38 fl oz per pump stroke.

Test time

Test volumes programmable by end user.

Pre-set volumes also available.



How LPA3 works - www.mpfiltri.com/index.php/products/oil-service/lpa-3.html

Moisture Sensing

% RH (Relative Humidity) $\pm 3\%$

Temperature Measurement

± 3 °C

Data Storage

Approximately 4000 timestamped tests in the integral LPA3 memory

System Pressure Measurement

$\pm 0.5\%$ Full Scale Accuracy Min 10 bar

Communication options

2 USB output ports

1 x USB B type for direct connection to PC and software

1 x USB A type for direct data download to USB memory stick

Environmental Protection

IP66 (Lid closed) IP54 (Lid open)

Weight / Dimensions

10 kg, Height (not inc handle) 350 mm, Depth 170 mm, Width 470 mm

Supply Voltage

18 - 19VDC

Power

Long-life Lithium Ion internal rechargeable battery (mains charger)

Software

LPA View software (included)

LPA3 is supplied with a full software package and digital product information

FOCUS ON

Exclusive MP Filtri technology

Featuring the latest breakthroughs in LED and photodiode technology, the LPA3 delivers increased accuracy combined with excellent repeatability.

W-Option



Water Saturation level (RH%) and fluid temperature sensor option.

P-Option

Live Pressure Readout (bar/PSI) on display screen.

LED light source


A single point high accuracy LED measures particles across all sizes giving increased accuracy with excellent repeatability.

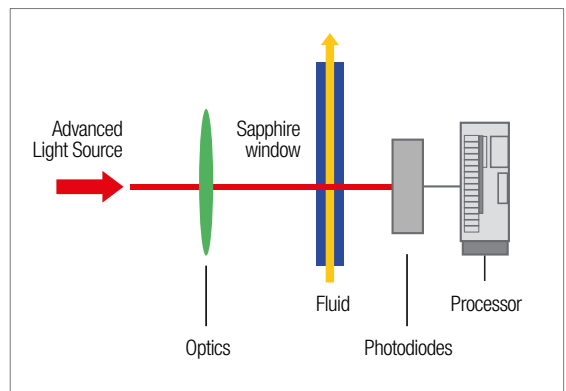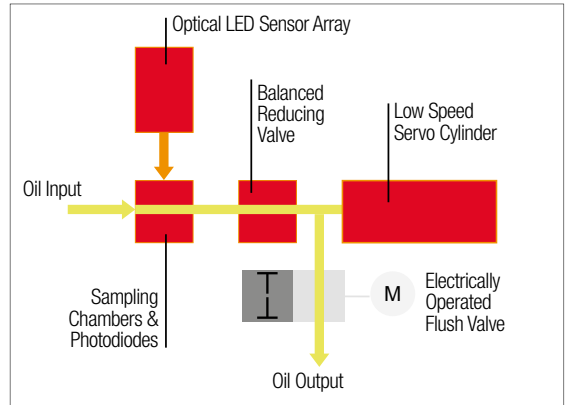


LPA View Software

The LPA View software is used with the LPA3, LPA2, CML2, CML4 and ICM particle counters. When connected to LPA View, MP Filtri CMPs can transfer results in realtime, or alternatively, historical results can be downloaded from the CMP's inbuilt memory.

- Runs on Windows XP, 7, and Windows 10
- Full adjustment & control of product settings, test times and alarms
- Easy test report generation
- Trend analysis
- Graphical display options
- Universal format across our contamination monitoring product range

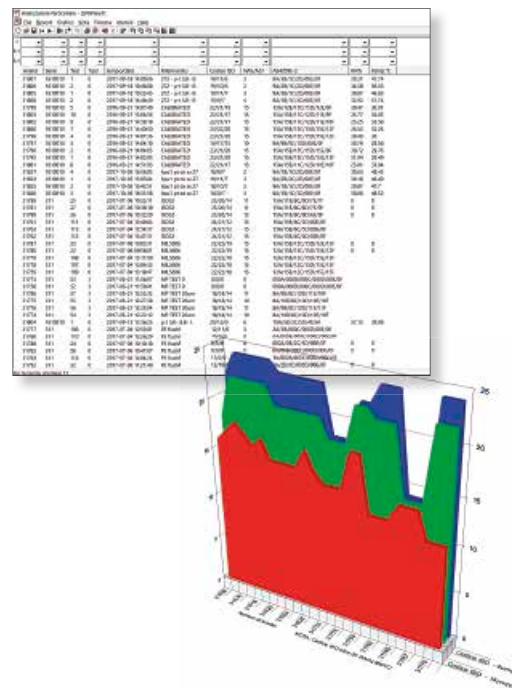

Dimensions

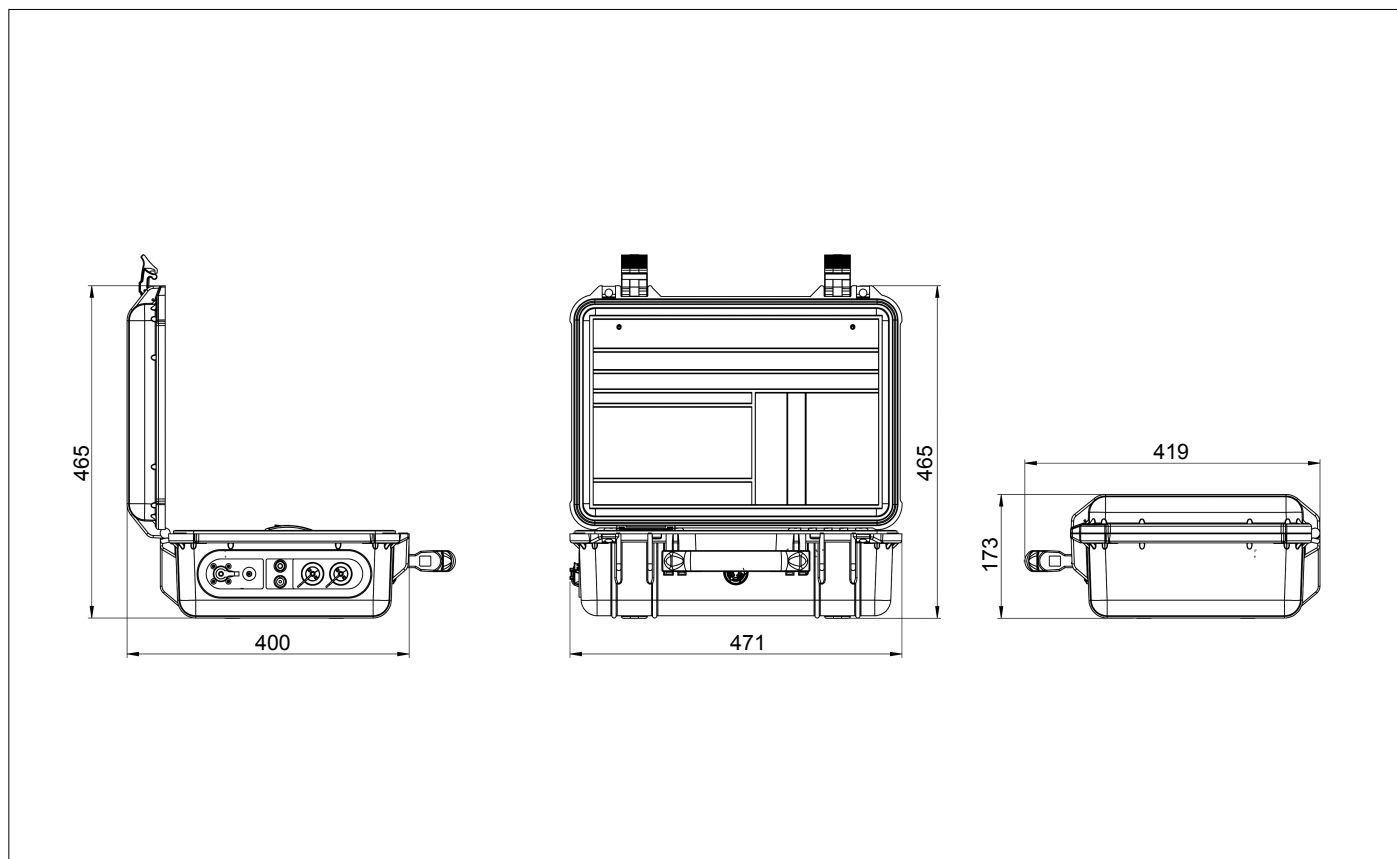

Designation & Ordering code

| AUTOMATIC PARTICLE COUNTER LPA3 | | Configuration example: LPA3 W P M 1 0 1 | | | | | |
|---------------------------------|--|---|--|--|--|--|--|
| Series | LPA3 Portable Laser Particle Analyzer | | | | | | |
| Moisture Sensor | O Without moisture and temperature sensor W With moisture and temperature sensor | | | | | | |
| Pressure Sensor | O Without on-screen inlet pressure display P With on-screen inlet pressure display | | | | | | |
| Fluid compatibility | M Mineral oil and synthetic fluid N M type fluids & Subsea fluids and water based fluids (*) S M & N type fluids & phosphate esters and aggressive fluids (*) | | | | | | |
| External Result | 1 With on board printer | | | | | | |
| Design Reference | 0 Std option with full accessory kit and carry bag | | | | | | |
| Country Plug Type | 1 UK, EU, US, AUS/CN | | | | | | |

(*) **N** and **S** version, moisture sensor (**W**) not available

Available with Screen Protector (Part number 63.095000). Consult your local branch for further details

LPA2 Aviation Edition

Twin Laser Particle Analyser




Description

Contamination Monitoring Products

Twin Laser Particle Analyser - LPA20PSTA30

The Airbus-approved LPA2 Aviation Edition is a highly precise, lightweight & fully portable instrument that has been created exclusively for the Aviation industry. It can automatically measure and display particulate contamination, moisture and temperature levels in various hydraulic fluids. The LPA2 can be connected to the MP range of bottle sampler products to enable laboratory based particle counting. The LPA2 is a solution for online monitoring of contamination in your hydraulic fluid, providing an immediate hydraulic health check. It employs predictive maintenance procedures to help reduce downtime and in turn costs.



> Features & Benefits

- Airbus-approved
- LPA2 saves time: online/realtime monitoring
- Immediate hydraulic health check
- Predictive maintenance procedures can be employed
- Reduced downtime for MRO teams
- Reduced costs associated with downtime
- The lightest machine in its class
- Fully portable
- Precision Instrument
- Full Calibration based on ISO11171
- Measures and displays the following international standard formats; ISO 4406, NAS 1638, AS 4059E
- Moisture and temperature sensing
- Data logging and 600 test result memory
- Manual and remote control flexibility
- Full size QWERTY keyboard
- Various test programme settings
- Full accessories kit included
- Internal rechargeable battery capable of performing 100 tests between charges

Scope of Supply

- 1 x LPA2 (Model: LPA20PSTA030)
- 1 x Airbus sampling valve adapter* and C spanner
- 1 x M16x2 microbore pressure hose, 2500mm long (For the Airbus Sampling Adaptor)
- 1 x EN6123-04 to M16x2 microbore pressure hose 2500mm long (compatible with A350 sampling valve)
- 1 x 1L waste receptacle
- 1 x 12V, 2A power adapter c/w UK/EU/US/AUS/CN heads
- 1 x 9 pin serial cable
- 1 x USB to serial converter
- 1 x 3 pin socket for external signals
- 1 x Hard copy of product user guide
- 1 x Digital copy of user guides/software/drivers
- 2 x Hard copy of calibration certificate
- 2 x Thermal printer paper
- 1 x Carry bag
- 1 x Airbus Operator's Guide

(*) Specific model will be as per ordered item
See Accessories page 93.



Front facing view



Right facing view

Airbus sampling valve adapter and C spanner



Closed case
Right facing view



Closed case
Left facing view

Technical data

Technology

Twin laser and twin optical diode detectors Based Light Extinction
Automatic Optical Particle Analyser

Particle Sizing

>4,6,14,21,25,38,50,70 $\mu\text{m}_{(c)}$ to ISO 4406 Standard

Analysis range

ISO 4406 Codes 8 to 24

NAS 1638 Class 2 to 12

AS4059/ISO 11218 Rev E, Table 1 Size Codes 2-12

AS4059/ISO 11218 Rev E, Table 2 Size Codes, A: 000 TO 12, B: 00 to 12,

C: 00 to 12, D: 2 to 12, E: 4-12, F: 7 to 12

AS4059 Rev F, Table 1 Size Codes 2-12

AS4059 Rev F, Table 2 Size Codes cpc

[000 to 12, 00 to 12, 00 to 12, 2 to 12, 4 to 12, 7 to 12]

GBT14039 Codes 8-24

GJB420B Size Codes, A: 000 to 12, B: 00 to 12, C: 00 to 12,

D: 2 to 12, E: 4-12, F: 7 to 12

Please Note: Lower Limits are Test Volume dependent

Accuracy

Better than 3% typical

Calibration

Each unit individually calibrated with ISO Medium Test Dust (MTD)
based on ISO 11171, on equipment certified by I.F.T.S. to ISO 11943

Viscosity range

Up to 400 cSt

Fluid temperature

Minimum: +5 °C

Maximum: +80 °C

Ambient Temperature

Minimum: -10 °C

Maximum: +80 °C

Pressure Max

400 bar / 5800 psi (gauge)

Minimum 2.0 bar / 29 psi (gauge) required

Sample Volume / Test time

8 ml. (short): 2:50- Recommended for set up only

15 ml. (normal): 5:00

30 ml. (dynamic): 10:00

24 ml. (bottle sampler): 8:00

15 ml. (continuous): 5:00

Moisture Sensing

% RH (Relative Humidity) $\pm 3\%$

Temperature Measurement

$\pm 3\%$

Data Storage

Up to 600 tests

Communication options

RS232 9 pin D plug

System Pressure Measurement

$\pm 0.5\%$ Full Scale Accuracy Min 10 bar

Environmental Protection

IP51 (lid open)

Weight / Dimensions**LPA2:**

9.8 kg, Height 218 mm, Depth 268 mm, Width 436 mm

LPA2 Aviation Edition with travel case - packed:

18.5 kg, Height 500 mm, Length 600 mm, Width 400 mm

Supply Voltage

9-36VDC

Power

Internal rechargeable battery (mains charger)

Outer Casing Finish

Anodised Aluminium

Wetted parts

S - 316 stainless steel, perfluoro elastomer, sapphire, EPDM

Software

LPA View software (included)

LPA2 is supplied with a full software package and digital product information

FOCUS ON

Exclusive MP Filtri technology

The combination of the two lasers with a unique optics and photodiode package enables the LPA2 to give increased accuracy combined with excellent repeatability.

P-Option



Live Pressure Readout (bar) on display screen.

Laser 1

A single point high accuracy laser measures particles of contamination at $4 \mu\text{m}_{(c)}$ and $6 \mu\text{m}_{(c)}$ giving increased accuracy with excellent repeatability.

Laser 2


Standard accuracy laser specifically designed for system contaminants between $6 \mu\text{m}_{(c)}$ and $70 \mu\text{m}_{(c)}$.

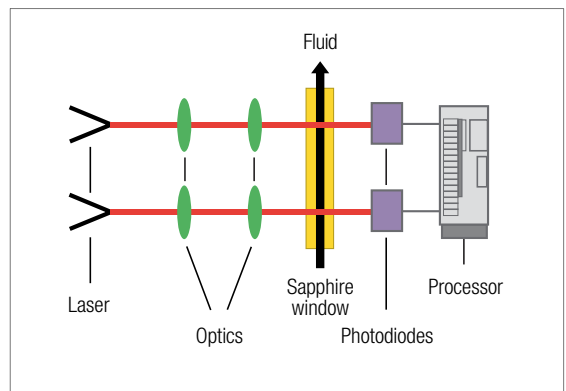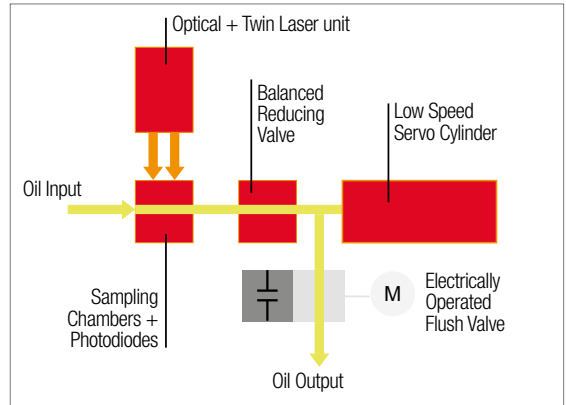


LPA View Software

The LPA View software is used with the LPA3, LPA2, CML2, CML4 and ICM particle counters. When connected to LPA View, MP Filtri CMPs can transfer results in realtime, or alternatively, historical results can be downloaded from the CMP's inbuilt memory.

- Runs on Windows XP, 7, and Windows 10
- Full adjustment & control of product settings, test times and alarms
- Easy test report generation
- Trend analysis
- Graphical display options
- Universal format across our contamination monitoring product range

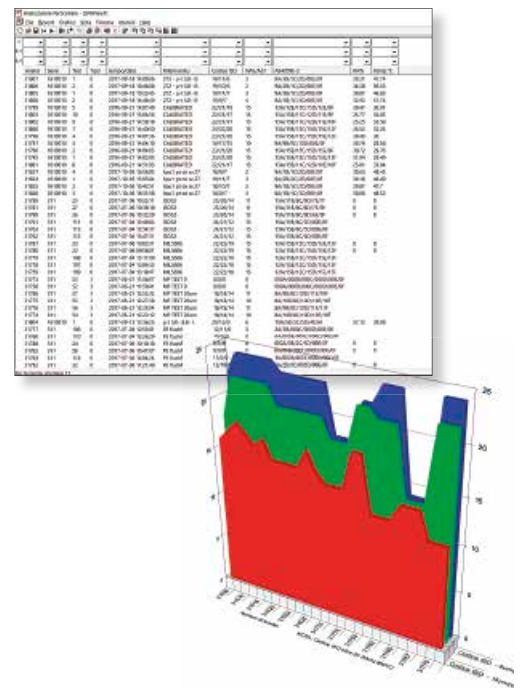

Dimensions

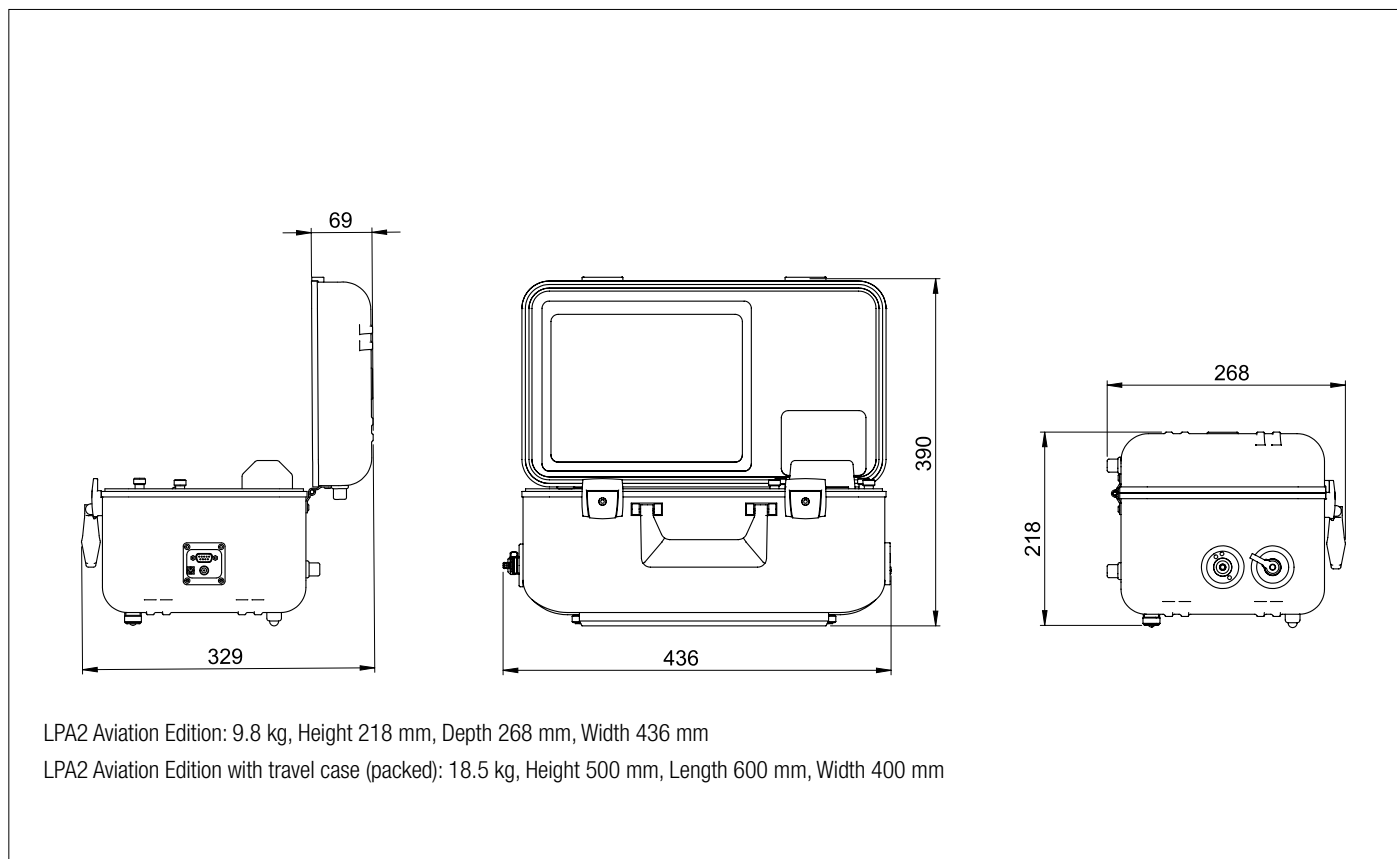

Designation & Ordering code

AUTOMATIC PARTICLE COUNTER LPA20PSTA30

| Series | Configuration example: | LPA2 | 0 | P | S | T | A | 30 |
|--|------------------------|------|---|---|---|---|---|----|
| LPA2 Twin Laser Particle Analyser | | | | | | | | |
| Moisture Sensor | | | | | | | | |
| 0 Without moisture and temperature sensor | | | | | | | | |
| Pressure Sensor | | | | | | | | |
| P With on-screen inlet pressure display | | | | | | | | |
| Fluid compatibility | | | | | | | | |
| S Phosphate ester and aggressive fluids | | | | | | | | |
| Accessories | | | | | | | | |
| T Standard unit with travel case | | | | | | | | |
| Bottle sampling options | | | | | | | | |
| A With Airbus adaptor | | | | | | | | |
| Design reference | | | | | | | | |
| 30 | | | | | | | | |

CML4

Compact Portable Contamination Monitor



Description

Contamination Monitoring Products

Compact Portable Contamination Monitor - CML4WOM001

A compact and portable contamination monitor that delivers a fast, accurate assessment of contamination in the field and is the perfect solution for the mobile, construction and plant hire sectors. Easy to master, the new CML4 features cutting-edge contamination control technology to anyone wishing to protect their critical systems.

The CML4 features a metering pump which enables analysis of both 'live' and unpressurised systems, delivering comprehensive contamination checks on any machine in any condition.



> Features & Benefits

- High-resolution 7" (178 mm) touchscreen display
- Real-time contamination results at-a-glance
- High-speed sample times
- Predictive maintenance enabled
- Unpressurised and pressurised sampling up to 350 bar
- Fully portable at just 8.5 kg
- Precision Instrument
- Easy to master - operators can get up and running in minutes
- Measures and displays the following international standard formats; ISO 4406, NAS 1638, AS 4059E&F Tables 1 and 2, ISO 11218, GBT 14039, GJB 420B, GOST 17216
- Moisture and temperature sensing
- Data logging and 4000 test result memory
- CMP View software (included on Data stick)
- Bluetooth printer (optional equipment)
- Full accessories kit included
- Work-all-day battery that can handle up to 140 tests on a single charge

Scope of Supply

- 1 x CML4 (Model: CML4WOM001)
- 1 x M16 x 2 Microbore pressure hose, 1500 mm long + pouch
- 1 x 2000 mm Quick release waste hose + pouch
- 1 x 1L Waste container
- 1 x Power cable and regional adaptors (UK/EU/US/CN/AUS) (Plug type dependent on order specification)
- 1 x USB Stick with digital copies of product user guides, CMP View software, accessory products, drivers and product brochures
- 2 x Hard copy certificate of calibration
- 1 x 1500 mm quick-release offline hose and pouch (Low pressure)
- 1 x USB C to USB A cable

See Accessories at page 93



Front facing view



Right facing view



Closed case
Right facing view



Closed case
Left facing view

Technical data

Technology

High precision LED light extinction automatic optical contamination monitor

Particle Sizing

>4, >6, >14, >21, >25, >38, >50, >70 $\mu\text{m}_{(c)}$

Analysis range

ISO 4406
 NAS 1638
 AS4059 Rev E, Table 1
 AS4059 Rev E, Table 2
 AS4059 Rev F, Table 1
 AS4059 Rev F, Table 2
 GBT 14039
 GJB 420 B
 GOST 17216

Accuracy

$\pm 1/2$ ISO code for 4, 6, 14 $\mu\text{m}_{(c)}$
 ± 1 code for larger sizes

Calibration

Calibrated with ISOMTD in accordance with ISO 21018 Part 1 and Part 4

Viscosity range

Up to 400 cSt

Fluid temperature

Minimum: +5 °C
 Maximum: +80 °C

Ambient Temperature

Minimum: -10 °C
 Maximum: +60 °C

Pressure

Offline: Maximum 2.0 bar / 29 psi
 Online: Maximum 350 bar / 5076 psi

Moisture Sensing

% RH (Relative Humidity) $\pm 3\%$

Temperature Measurement

± 3 °C

Data Storage

Up to 4000 tests

Environmental Protection

IP65 (Lid closed) - IP54 (Lid open)

Weight / Dimensions

8.5 kg (unit only)
 Height 149 mm (not including handle),
 Depth 155 mm, Width 350 mm

Power

Lithium-Ion rechargeable battery

Battery Life

Up to 8hrs

Software

CMP View (Provided)

CML4 is supplied with a full software package and digital product information

FOCUS ON

Exclusive MP Filtri technology



Featuring the latest breakthroughs in LED and photodiode technology, the CML4 delivers outstanding accuracy combined with exceptional repeatability

W-Option

Water Saturation level (RH%) and fluid temperature sensor option.

LED light source

A single point high accuracy LED measures particles across all sizes.

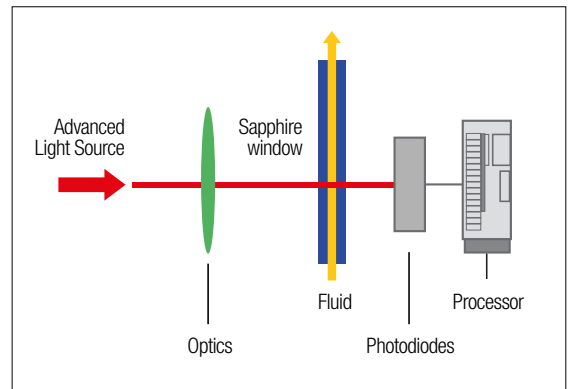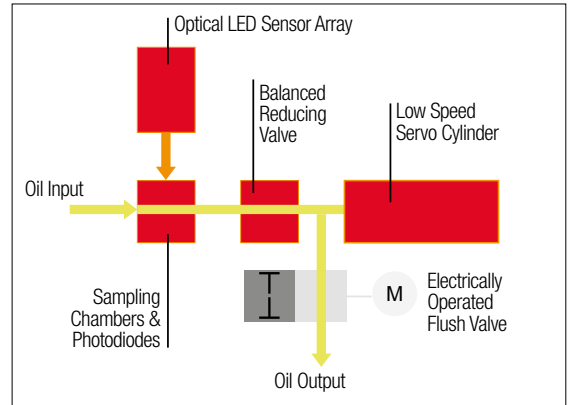


CMP View Software

Our new CMP View software is used with the LPA3, LPA2 (Aviation Edition), CML2, CML4 and ICM contamination monitors.

When connected to CMP View, MP Filtri CMP devices can transfer results in realtime, or alternatively, historical results can be downloaded from each device's in-built memory.

- Runs on Windows XP, 7, and Windows 10
- Included free with CMP Products
- Brand new design, created in-house for ease of use
- Comprehensive functionality
- Can be mastered quickly without the need for formal training
- Key results and data available at-a-glance
- Full adjustment and control of product settings, test times and alarms
- Easy test report generation
- Full trend analysis
- Universal format across our contamination monitoring product range
- Multi-machine monitoring



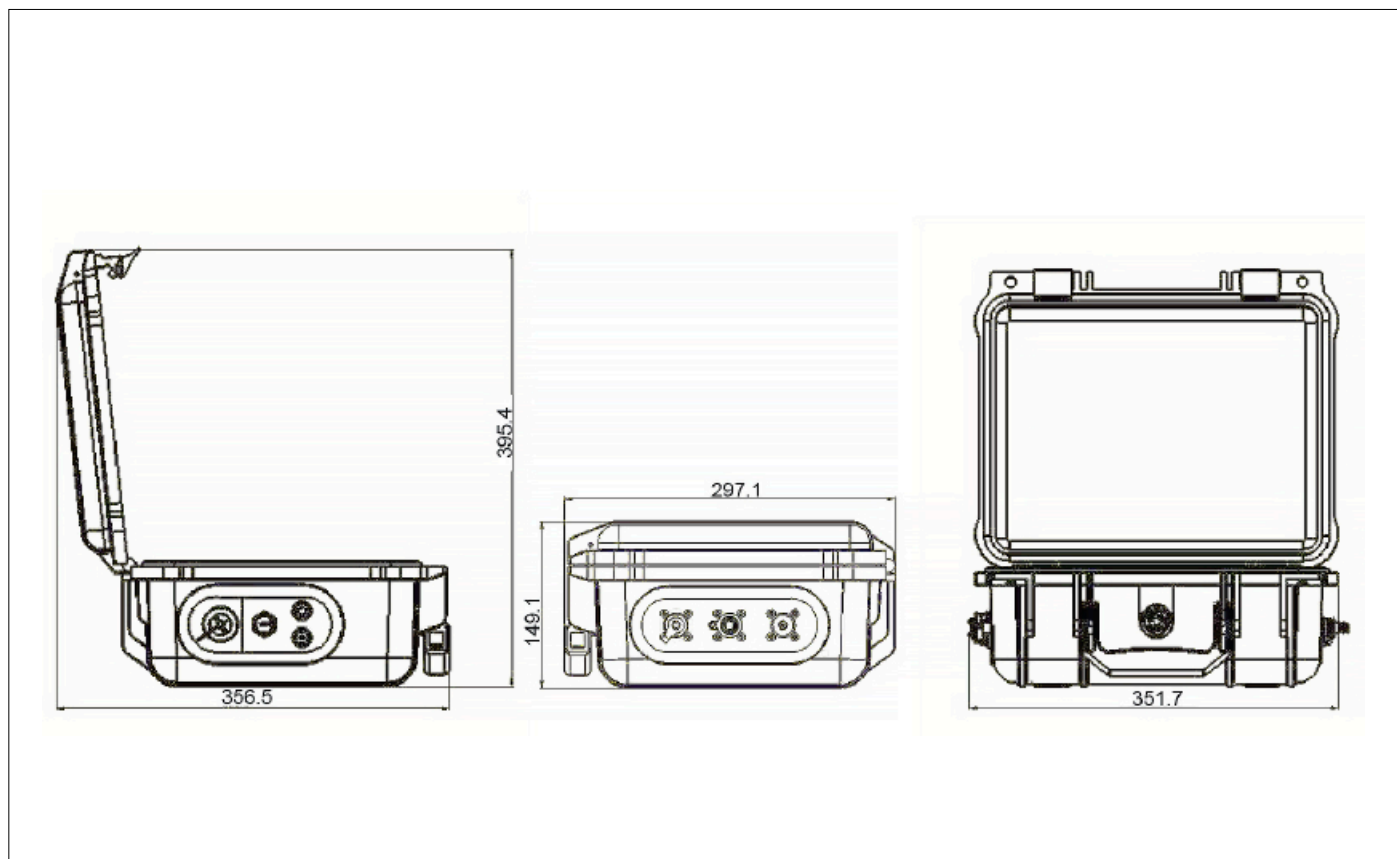

Designation & Ordering code

AUTOMATIC CONTAMINATION MONITOR CML4

| Series | Configuration example: CML4 W 0 M 00 1 | | | | | |
|---|--|--|--|--|--|--|
| CML4 Light extinction Contamination monitor | | | | | | |
| Moisture Sensor | | | | | | |
| W With moisture and temperature sensor | | | | | | |
| Design Reference | | | | | | |
| 0 Standard option | | | | | | |
| Fluid compatibility | | | | | | |
| M Mineral oil and synthetic fluids | | | | | | |
| Design Reference | | | | | | |
| 00 Standard option with full accessory kit and carry bag | | | | | | |
| Country Plug Type | | | | | | |
| 1 UK | | | | | | |
| 2 US | | | | | | |
| 3 EU | | | | | | |
| 4 CN/AUS | | | | | | |

ICM 4.0

In-Line Contamination Monitor - WiFi technology integrated




Description

Contamination Monitoring Products

In-Line Contamination Monitor - WiFi technology integrated

The ICM 4.0 automatically measures and displays particulate contamination, moisture and temperature levels in various hydraulic fluids.

It is designed specifically to be mounted directly to systems, where ongoing measurement or analysis is required, and where space and costs are limited.



> Features & Benefits

- Integrated WiFi
- Mobile APP
- 8 channel contamination measurement & display
- Measures and displays the following international standard formats: ISO 4406, NAS 1638, AS 4059E
- Moisture and temperature sensing fluid dependent
- Data logging and 4000 test result memory
- Manual, automatic and remote control flexibility
- Multicolour indicators via LCD (K versions) and LED with output alarm signals as standard
- Robust die cast aluminium construction
- LPA View software (included)
- Pressure max. 420 bar
- Environmental protection IP65/67 versatile
- Secondary connector to allow the simultaneous control/download of results during operation
- 4-20mA analogue output as standard

Status LED

All ICM 4.0 versions have a multicolour indicator on the front panel, which is used to indicate the status or alarm state. ICM-K versions also have a screen that changes colour. The alarm thresholds can be set from LPA-View via the serial interface.

Screen and multicolor indicators

- Green indicates that the test result passed, i.e. none of the alarm thresholds were exceeded
- Yellow indicates that the lower cleanliness limit was exceeded, but not the upper one
- Red indicates that the upper cleanliness limit was exceeded
- Blue indicates that the upper water content limit was exceeded
- Red/Blue Alternating indicates both cleanliness and water content upper limits exceeded
- Violet indicates that the upper temperature limit was exceeded

Scope of Supply

- 1 x ICM 4.0 (Specific model will be as per ordered item)
- 1 x 3m Twisted Pair Cable Assembly
- 1 x Hard copy Quick start/wiring installation guide
- 1 x Hard copy Fluid Condition Handbook
- 1 x Digital copy of user guides/software/drivers
- 1 x Hard copy of calibration certificate

See Accessories at page 93



Left facing view

Right facing view



Top view

Bottom view

Technical data

Technology

LED based Light Extinction Automatic Optical Particle Counter

Particle Sizing

>4, 6, 14, 21, 25, 38, 50, 70 $\mu\text{m}_{(c)}$

Analysis range

ISO 4406 Codes 8 to 24

NAS 1638 Class 2 to 12

AS4059/ISO 11218 Rev E, Table 1 Size Codes 2-12

AS4059/ISO 11218 Rev E, Table 2 Size Codes, A: 000 TO 12, B: 00 to 12,

C: 00 to 12, D: 2 to 12, E: 4-12, F: 7 to 12

AS4059 Rev F, Table 1 Size Codes 2-12

AS4059 Rev F, Table 2 Size Codes cpc

[000 to 12, 00 to 12, 00 to 12, 2 to 12, 4 to 12, 7 to 12]

GBT14039 Codes 8-24

GJB420B Size Codes, A: 000 to 12, B: 00 to 12, C: 00 to 12,

D: 2 to 12, E: 4-12, F: 7 to 12

Please Note: Lower Limits are Test Volume dependent

Accuracy

$\pm 1/2$ ISO code for 4, 6, 14 $\mu\text{m}_{(c)}$

± 1 code for 21, 25, 38, 50, 70 $\mu\text{m}_{(c)}$

Calibration

Individually calibrated with ISO Medium Test Dust (MTD)

based on ISO 11171, on equipment certified by I.F.T.S. ISO 11943

Operating Flow Rate

20 - 400 ml/minute

Viscosity range

Up to 1000 cSt

Fluid temperature

Minimum: -25 °C

Maximum: +80 °C

Ambient Temperature

Minimum: -10 °C

Maximum: +55 °C

Pressure

Minimum: 0.5 bar / 7.25 psi

Maximum: 420 bar/ 6092 psi static

Test time

Adjustable 10 - 3600 seconds. Factory set to 120 seconds.

Start delay & programmable test intervals available as standard

Flow rate measurement

Indicator only

Moisture Sensing

% RH (Relative Humidity) $\pm 3\%$

Temperature Measurement

± 3 °C

Data Storage

Up to 4000 tests

Communication options

RS485, MODBUS, CANBUS, 4-20mA time multiplex as standard

Relays

Two solid state relays fitted to "R" version for output to alarm circuits

Environmental Protection

IP 65/67 versatile IK04 Impact Protection

Weight / Dimensions

1.6 kg, Height 123 mm, Depth 65 mm, Width 142 mm

Supply Voltage

9-36VDC

Power consumption

<2.2 W

Outer Casing Finish

Polyurethane BS X34B. Colour BS381-638 (Dark Sea Grey)

Industry 4.0 ready with appropriate accessory product

Wetted parts

M - C46400 Cu alloy, 316 stainless steel, FPM, FR4, sapphire.

N - 316 stainless steel, FPM, sapphire.

S - 316 stainless steel, perfluoro elastomer, sapphire, EPDM.

Software

LPA View software (included)

ICM 4.0 is supplied with a full software package and digital product information

Wifi Connectivity


Wifi connectivity ensures you can access and share real-time data and analysis instantly via a number of different platforms.

- All connections from ICM 4.0:
Modbus, Canbus, 4-20mA signal and Switched alarm relay outputs (WiFi replaces the need for the remote connector).
Non-WiFi Connections also available.
- Cloud based systems:
Capability to connect to customers own cloud-based systems via Modbus.
User access to all ICMs on the same network, including remotely via VPN.
- Web browser readouts:
Generated from the unique IP address of each ICM 4.0.
- Mobile App:
Available for Apple iOS and Android devices.

LPA View Software


The LPA View software is used with the LPA3, LPA2, CML2, CML4 and ICM particle counters. When connected to LPA View, MP Filtri CMPs can transfer results in realtime, or alternatively, historical results can be downloaded from the CMP's inbuilt memory.

- Runs on Windows XP, 7, and Windows 10
- Full adjustment & control of product settings, test times and alarms
- Easy test report generation
- Trend analysis
- Graphical display options
- Universal format across our contamination monitoring product range

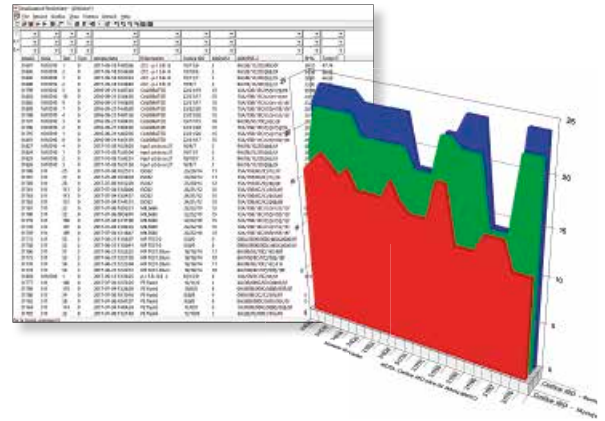


Hydraulic Circuit


TYPICAL PRESSURE LINE

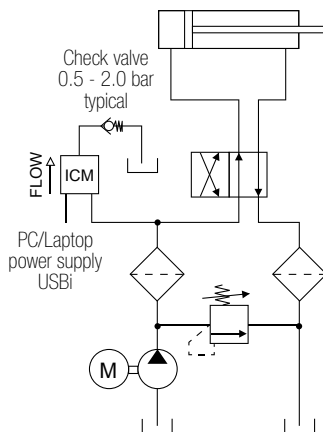


TYPICAL RETURN LINE

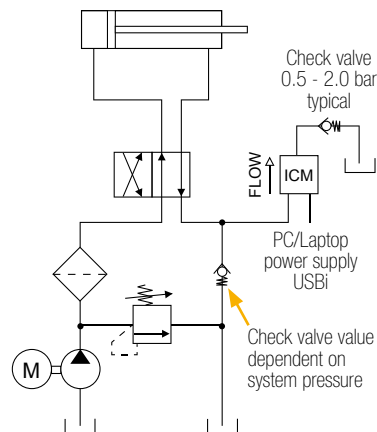

For installation guidance please visit:
www.mpfiltri.com/products/contamination-monitoring-products/icm-40-118.html#cont

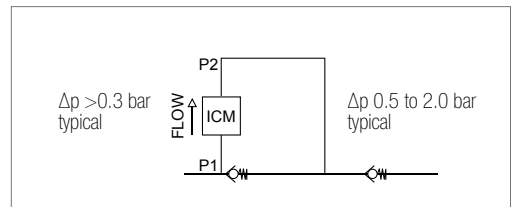

Dimensions

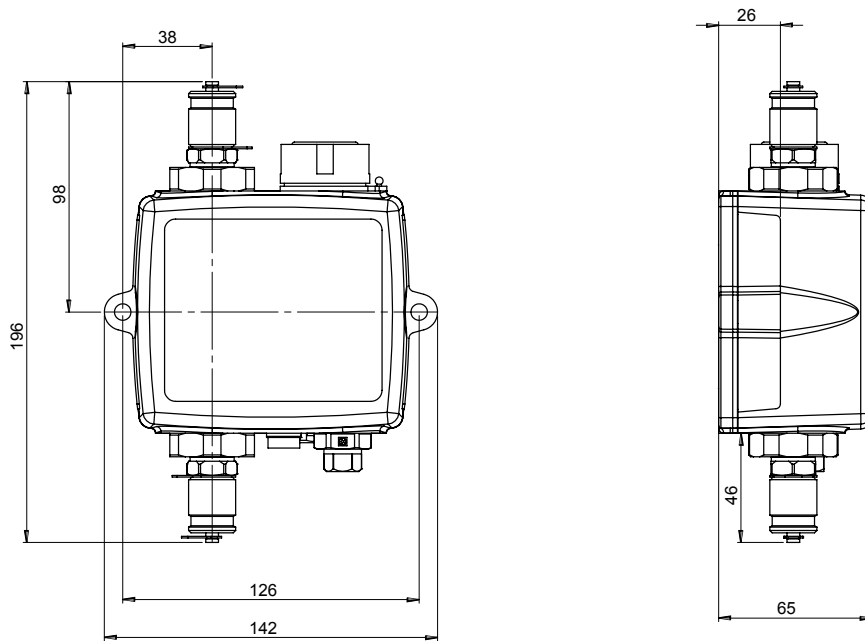

It is important to ensure a minimum 0.5 bar differential across the ICM4.0
 The ICM 4.0 can be used as a standalone product or can be controlled by external PC, PLC.

Designation & Ordering code

AUTOMATIC PARTICLE COUNTER ICM 4.0

| Series | Configuration example: | ICM | W | M | K | R | G1 | 4.0 |
|---|------------------------|-----|---|---|---|---|----|-----|
| ICM In-Line Contamination Monitor | | | | | | | | |
| Moisture Sensor (RH%) | | | | | | | | |
| 0 Without moisture and temperature sensor | | | | | | | | |
| W With moisture and temperature sensor | | | | | | | | |
| Fluid compatibility | | | | | | | | |
| M Mineral/synthetic oils | | | | | | | | |
| N Subsea and water based fluids (*) | | | | | | | | |
| S M & N type fluids & phosphate esters/aviation fluids (*) - G3 port option only | | | | | | | | |
| Keypad / Display | | | | | | | | |
| 0 Without LCD and keypad control | | | | | | | | |
| K With LCD and keypad control | | | | | | | | |
| Device output | | | | | | | | |
| R With relays / external alarm outputs | | | | | | | | |
| Connections | | | | | | | | |
| G1 M16x2 test points | | | | | | | | |
| G3 1/4"BSPP female ports | | | | | | | | |
| G4 7/16th UNF female ports | | | | | | | | |
| Series | | | | | | | | |
| 4.0 ICM 4.0 with integral WiFi | | | | | | | | |

(*) **N** and **S** version, moisture sensor (**W**) not available

ICM 2.0

In-Line Contamination Monitor




Description

Contamination Monitoring Products

In-Line Contamination Monitor

The ICM 2.0 automatically measures and displays particulate contamination, moisture and temperature levels in various hydraulic fluids.

It is designed specifically to be mounted directly to systems, where ongoing measurement or analysis is required, and where space and costs are limited.



> Features & Benefits

- 8 channel contamination measurement & display
- Measures and displays the following international standard formats: ISO 4406, NAS 1638, AS 4059E
- Moisture and temperature sensing fluid dependent
- Data logging and 4000 test result memory
- Manual, automatic and remote control flexibility
- Multicolour indicators via LCD (K versions) and LED with output alarm signals as standard
- Robust die cast aluminium construction
- LPA View software (included)
- Pressure max. 420 bar
- Environmental protection IP65/67 versatile
- Secondary connector to allow the simultaneous control/download of results during operation
- Option available to download all results onto a USB stick, direct from the ICM
- 4-20mA analogue output as standard

Scope of Supply

- 1 x ICM 2.0 (Specific model will be as per ordered item)
- 1 x 3m Twisted Pair Cable Assembly
- 1 x Hard copy Quick start/wiring installation guide
- 1 x Hard copy Fluid Condition Handbook
- 1 x Digital copy of user guides/software/drivers
- 1 x Hard copy of calibration certificate

See Accessories at page 93

Status LED

All ICM 2.0 versions have a multicolour indicator on the front panel, which is used to indicate the status or alarm state. ICM-K versions also have a screen that changes colour. The alarm thresholds can be set from LPA-View via the serial interface.

Screen and multicolor indicators

- Green indicates that the test result passed, i.e. none of the alarm thresholds were exceeded
- Yellow indicates that the lower cleanliness limit was exceeded, but not the upper one
- Red indicates that the upper cleanliness limit was exceeded
- Blue indicates that the upper water content limit was exceeded
- Red/Blue Alternating indicates both cleanliness and water content upper limits exceeded
- Violet indicates that the upper temperature limit was exceeded



Left facing view



Right facing view



Top view with USB port



Bottom view

Technical data

Technology

LED Based Light Extinction Automatic Optical Contamination Monitor

Particle Sizing

>4, 6, 14, 21, 25, 38, 50, 70 $\mu\text{m}_{(c)}$

Analysis range

ISO 4406 Codes 8 to 24

NAS 1638 Class 2 to 12

AS4059/ISO 11218 Rev E, Table 1 Size Codes 2-12

AS4059/ISO 11218 Rev E, Table 2 Size Codes, A: 000 TO 12, B: 00 to 12,

C: 00 to 12, D: 2 to 12, E: 4-12, F: 7 to 12

AS4059 Rev F, Table 1 Size Codes 2-12

AS4059 Rev F, Table 2 Size Codes cpc

[000 to 12, 00 to 12, 00 to 12, 2 to 12, 4 to 12, 7 to 12]

GBT14039 Codes 8-24

GJB420B Size Codes, A: 000 to 12, B: 00 to 12, C: 00 to 12,

D: 2 to 12, E: 4-12, F: 7 to 12

Please Note: Lower Limits are Test Volume dependent

Accuracy

$\pm 1/2$ ISO code for 4, 6, 14 $\mu\text{m}_{(c)}$

± 1 code for 21, 25, 38, 50, 70 $\mu\text{m}_{(c)}$

Calibration

Individually calibrated with ISO Medium Test Dust (MTD) based on ISO 11171, on equipment certified by I.F.T.S. ISO 11943

Operating Flow Rate

20 - 400 ml/minute

Viscosity range

Up to 1000 cSt

Fluid temperature

Minimum: -25 °C

Maximum: +80 °C

Ambient Temperature

From -25 °C to +80 °C (non K version)

From -25 °C to +55 °C (K version)

Pressure

Maximum: 420 bar / 6092 psi

Test time

Adjustable 10 - 3600 seconds. Factory set to 120 seconds.

Start delay & programmable test intervals available as standard

Flow rate measurement

Indicator only

Moisture Sensing

% RH (Relative Humidity) $\pm 3\%$

Temperature Measurement

± 3 °C

Data Storage

Up to 4000 tests

Communication options

RS485, MODBUS, CANBUS, 4-20mA time multiplex as standard

Relays

Two solid state relays fitted to "R" version for output to alarm circuits

Environmental Protection

IP 65/67 versatile IK04 Impact Protection

Weight / Dimensions

1.6 kg, Height 123 mm, Depth 65 mm, Width 142 mm

Supply Voltage

9-36VDC

Power consumption

<2.2 W

Outer Casing Finish

Polyurethane BS X34B. Colour BS381-638 (Dark Sea Grey)

Industry 4.0 ready with appropriate accessory product

Wetted parts

M - C46400 Cu alloy, 316 stainless steel, FPM, FR4, sapphire.

N - 316 stainless steel, FPM, sapphire.

S - 316 stainless steel, perfluoro elastomer, sapphire, EPDM.

Software


LPA View software (included)

ICM 2.0 is supplied with a full software package and digital product information

LPA View Software


The LPA View software is used with the LPA3, LPA2, CML2, CML4 and ICM particle counters. When connected to LPA View, MP Filtri CMPs can transfer results in realtime, or alternatively, historical results can be downloaded from the CMP's inbuilt memory.

- Runs on Windows XP, 7, and Windows 10
- Full adjustment & control of product settings, test times and alarms
- Easy test report generation
- Trend analysis
- Graphical display options
- Universal format across our contamination monitoring product range

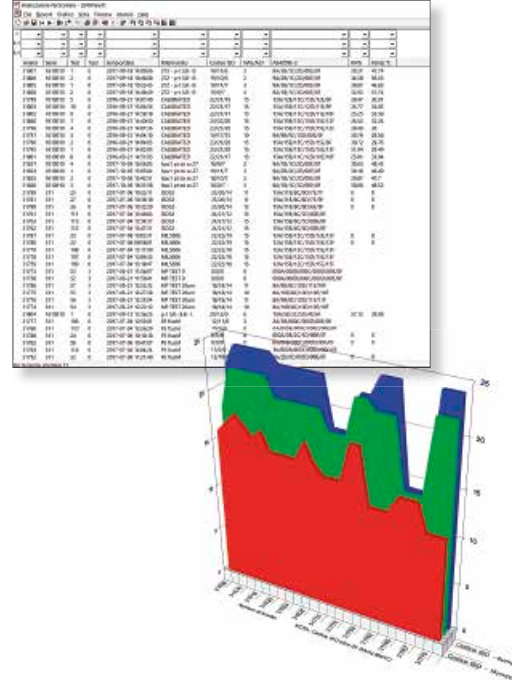


Hydraulic Circuit


TYPICAL PRESSURE LINE

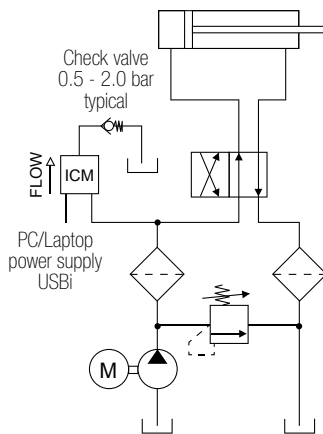


TYPICAL RETURN LINE

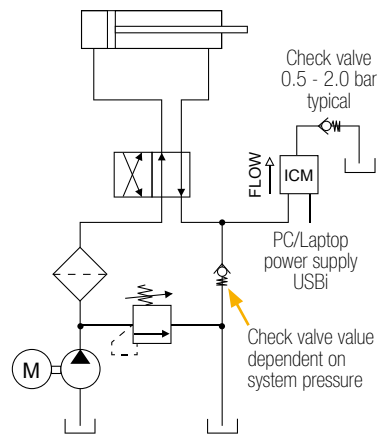

For installation guidance please visit www.mpfiltri.co.uk/ICM-2_0/#Home

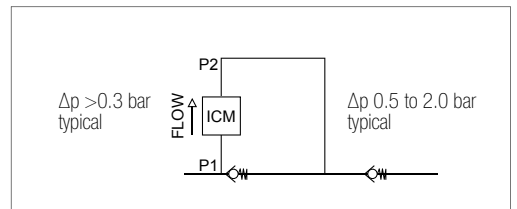

Dimensions

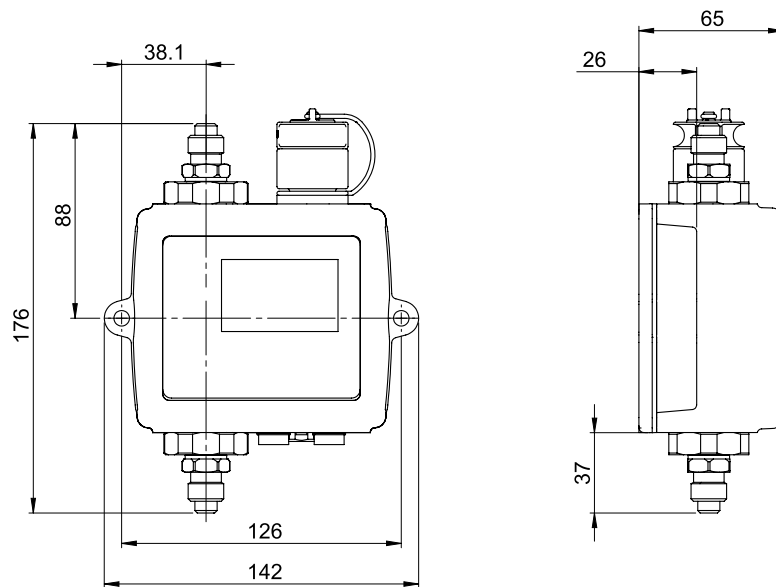

It is important to ensure a 0.5 - 2.0 bar differential across the ICM 2.0

The ICM 2.0 can be used as a standalone product or can be controlled by external PC, PLC or the ICMRDU2.0 (Remote Display Unit. 10 m control cable supplied as standard).

Designation & Ordering code

AUTOMATIC PARTICLE COUNTER ICM 2.0

| Series | Configuration example: | ICM | W | M | K | R | G1 | 2.0 |
|--|------------------------|-----|---|---|---|---|----|-----|
| ICM In-Line Contamination Monitor | | | | | | | | |
| Moisture Sensor (RH%) | | | | | | | | |
| 0 Without moisture and temperature sensor | | | | | | | | |
| W With moisture and temperature sensor | | | | | | | | |
| Fluid compatibility | | | | | | | | |
| M Mineral/synthetic oils | | | | | | | | |
| N Subsea fluids and water based fluids (*) | | | | | | | | |
| S Phosphate ester and aggressive fluids (*) | | | | | | | | |
| Keypad / Display | | | | | | | | |
| 0 Without keypad / display | | | | | | | | |
| K With keypad / display | | | | | | | | |
| Device output | | | | | | | | |
| R With relays / external alarm outputs | | | | | | | | |
| U Test record transfer (direct to USB stick) plus relays/external alarm outputs | | | | | | | | |
| Connections | | | | | | | | |
| G1 ICM complete with M16x2 pressure test point connections fitted | | | | | | | | |
| G3 1/4" BSP - Female port | | | | | | | | |
| G4 7/16" UNF - Female port | | | | | | | | |
| Series | | | | | | | | |
| 2.0 | | | | | | | | |

(*) **N** and **S** version, moisture sensor (**W**) not available

AZ2


 ATEX Fluid Contamination Monitors

Description

Contamination Monitoring Products

Ex Atex Zone 2, Cat 3G, Fluid Contamination Monitors

Our AZ2 contamination monitor can automatically measure and save particulate contamination, moisture and temperature levels in various hydraulic fluids. They are designed specifically to be mounted directly to systems where ongoing measurement or analysis is required in high risk or explosive environments.



> Features & Benefits

- 8 channel contamination measurement & display
- Measures and displays the following international standard formats:
ISO 4406, NAS 1638, AS 4059E
- RS485, MODBUS, CANBUS
- Moisture and temperature sensing fluid dependent
- Data logging and 4000 test result memory
- Automatic and remote control flexibility
- Multicolour indicators via onboard LED with output alarm signals as standard
- LPA View software (included)

Scope of Supply

- 1 x ICMKAZ2 (*)
- 1 x Atex approved non wired cable connector and gland
- 1 x Hard copy Fluid Condition Handbook
- 1 x Digital copy of user guides/software/drivers
- 1 x Hard copy of calibration certificate
- 1 x Hard copy of atex certificate

(*) Specific model will be as per ordered item

See Accessories at page 93

Status LED

All AZ2 versions have a multicolour indicator on the front panel, which is used to indicate the status or alarm state. The alarm thresholds can be set from LPA-View via the serial interface and bespoke connector (available on request).

Multicolor indicators

- Green indicates that the test result passed, i.e. none of the alarm thresholds were exceeded
- Yellow indicates that the lower cleanliness limit was exceeded, but not the upper one
- Red indicates that the upper cleanliness limit was exceeded
- Blue indicates that the upper water content limit was exceeded
- Red/Blue Alternating indicates both cleanliness and water content upper limits exceeded
- Violet indicates that the upper temperature limit was exceeded



Front facing view



Right facing view



Top facing view



Bottom facing view

Technical data

Technology

LED Based Light Extinction Automatic Optical Contamination Monitor

Particle Sizing

>4, 6, 14, 21, 25, 38, 50, 70 $\mu\text{m}_{(c)}$

Analysis range

ISO 4406 Code 0 to 25

NAS 1638 Class 00 to 12

AS4059 Rev. E Table 1&2 Sizes A-F: 000 to 12

Accuracy

$\pm 1/2$ ISO code for 4, 6, 14 $\mu\text{m}_{(c)}$

± 1 code for 21, 25, 38, 50, 70 $\mu\text{m}_{(c)}$

Calibration

Individually calibrated with ISO Medium Test Dust (MTD)

based on ISO 11171, on equivalent certified by I.F.T.S. ISO 11943

Operating Flow Rate

20 - 400 ml/minute

Viscosity range

Up to 1000 cSt

Fluid temperature

Minimum: -25 °C

Maximum: +80 °C

Ambient Temperature

Minimum: -25 °C

Maximum: +80 °C

Pressure

Maximum: 400 bar / 5802 psi (for high frequency pressure pulse and out range temperature applications contact MP Filtri)

Test time

Adjustable 10 - 3600 seconds. Factory set to 120 seconds.

Start delay & programmable test intervals available as standard

Flow rate measurement

Indicator only

Moisture Sensing

% RH (Relative Humidity) $\pm 3\%$

Temperature Measurement

± 3 °C

Data Storage

Up to 4000 tests

Communication options

RS485, RS232, MODBUS, CANBUS as standard

Relays

Two solid state relays fitted to "R" version for output to alarm circuits

Environmental Protection

IP66

Weight / Dimensions

10.5 kg, Height 320 mm, Depth 130 mm, Width 186 mm

Supply Voltage

9-36VDC

Current Supply

12V - 150mA

24V - 80mA

36V - 60mA

Power consumption

<2.2 W

Outer Casing Finish

Stainless Steel

Wetted parts

M - C46400 Cu alloy, 316 stainless steel, FPM, FR4, sapphire.

N - 316 stainless steel, FPM, sapphire.

S - 316 stainless steel, perfluoro elastomer, sapphire, EPDM.

Software

LPA View software (included)

Atex classification

CE  3 G EX nR IIB T5 GC IP66


ICM AZ2 cable wiring details

MP Filtri do not supply an ATEX approved cable with the ICM AZ2 products as customers may run such cables through varying ATEX zones. Wiring diagrams supplied, please consult product user guide for full information.

Note: an adapter cable and ICMUSBi product will be required should LPA View be utilised as the control software. These accessories are only suitable for use outside of the zoned areas

AZ2 is supplied with a full software package and digital product information

Dimensions

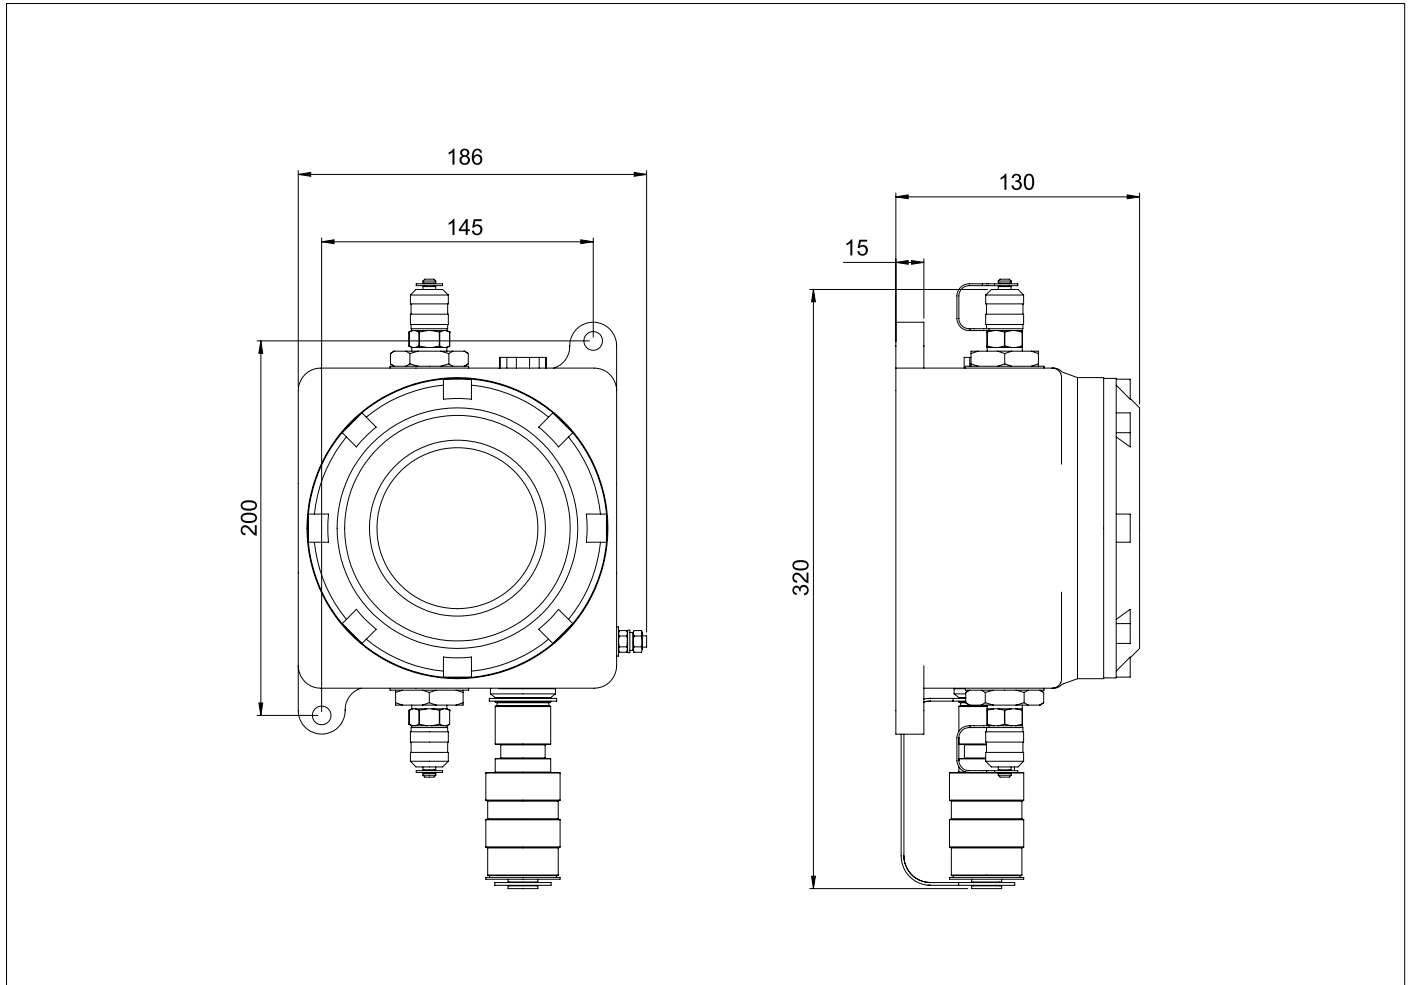

Designation & Ordering code

AUTOMATIC PARTICLE COUNTER AZ2

Configurations :

- ICM
W
M
K
R
G1
AZ2
 Moisture Sensor, Mineral / Petroleum based fluids, LCD Display, Relays, M16x2 test point connections
- ICM
O
M
K
R
G1
AZ2
 Mineral / Petroleum based fluids, LCD Display, Relays, M16x2 test point connections
- ICM
O
N
K
R
G1
AZ2
 Off shore / Water based fluids, LCD Display, Relays, M16x2 test point connections
- ICM
O
S
K
R
G1
AZ2
 Phosphate Ester and aggressive fluids, LCD output, Relays, M16x2 test point connections

All of MP Filtri's AZ2 products are designed to be run via PLC control & the Modbus communication protocol.

Note: All units are fully compatible with and can be programmed via our bespoke windows based LPA View software.

ICU

In-line Contamination Monitoring Unit



Description

Contamination Monitoring Products

In-line Contamination Monitoring Unit

The ICU automatically measures particulate contamination levels in various hydraulic fluids and is designed for industrial applications.


It is designed to be manifold mounted directly to systems, where ongoing measurement or analysis is required, and where space and costs are limited.

> Features & Benefits

- Manifold mounting
- 3 channel contamination measurement
- Measures ISO 4406
- Robust design and construction
- Pressure max. 350 bar
- Environmental protection IP65/67 versatile
- 4-20mA analogue output as standard

Scope of Supply

- 1 x ICU0M00G5P01
- 1 x Installation kit:
 - 4 x M6x1.0x60 mm long fixing bolts
 - 2 x 6.50 ID x 1.5 CSD FKM o-ring seals
- 1 x Hard copy of calibration certificate



Right facing view



Front / Left facing view

Technical data

Technology

LED Based Light Extinction Automatic Optical Contamination Monitor

Particle Sizing

>4, 6, 14 $\mu\text{m}_{(c)}$

Analysis range

ISO 4406 Code 0 to 20

Accuracy

$\pm 1/2$ ISO code for 4, 6, 14 $\mu\text{m}_{(c)}$ across the analysis range

Calibration

Individually calibrated with ISO Medium Test Dust (MTD) based on ISO 11171, on equipment certified by I.F.T.S. ISO 11943

Operating Flow Rate

200 ml/minute controlled by the built in flow control valve

Viscosity range

Up to 1000 cSt

Fluid temperature

Minimum: 0 °C

Maximum: +80 °C

Ambient Temperature

Minimum: 0 °C

Maximum: +60 °C

Pressure

Minimum: 25 bar / 362 psi

Maximum: 350 bar / 5075 psi

Test time

Adjustable 10 - 3600 seconds

Communication options

4-20 mA time multiplex as standard

Environmental Protection

IP 65/67 versatile

Weight / Dimensions

1.4 Kg, Height 70 mm, Depth 50 mm, Width 93 mm

Supply Voltage

24VDC $\pm 20\%$

Power consumption


<2.2 W

Cable

Electrical cable has to be ordered separately (optional accessory), MP Filtri item no. 13.061000 - ICU Cable M12 4 pin 1.5m long

ICU is supplied with a full software package and digital product information

Dimensions

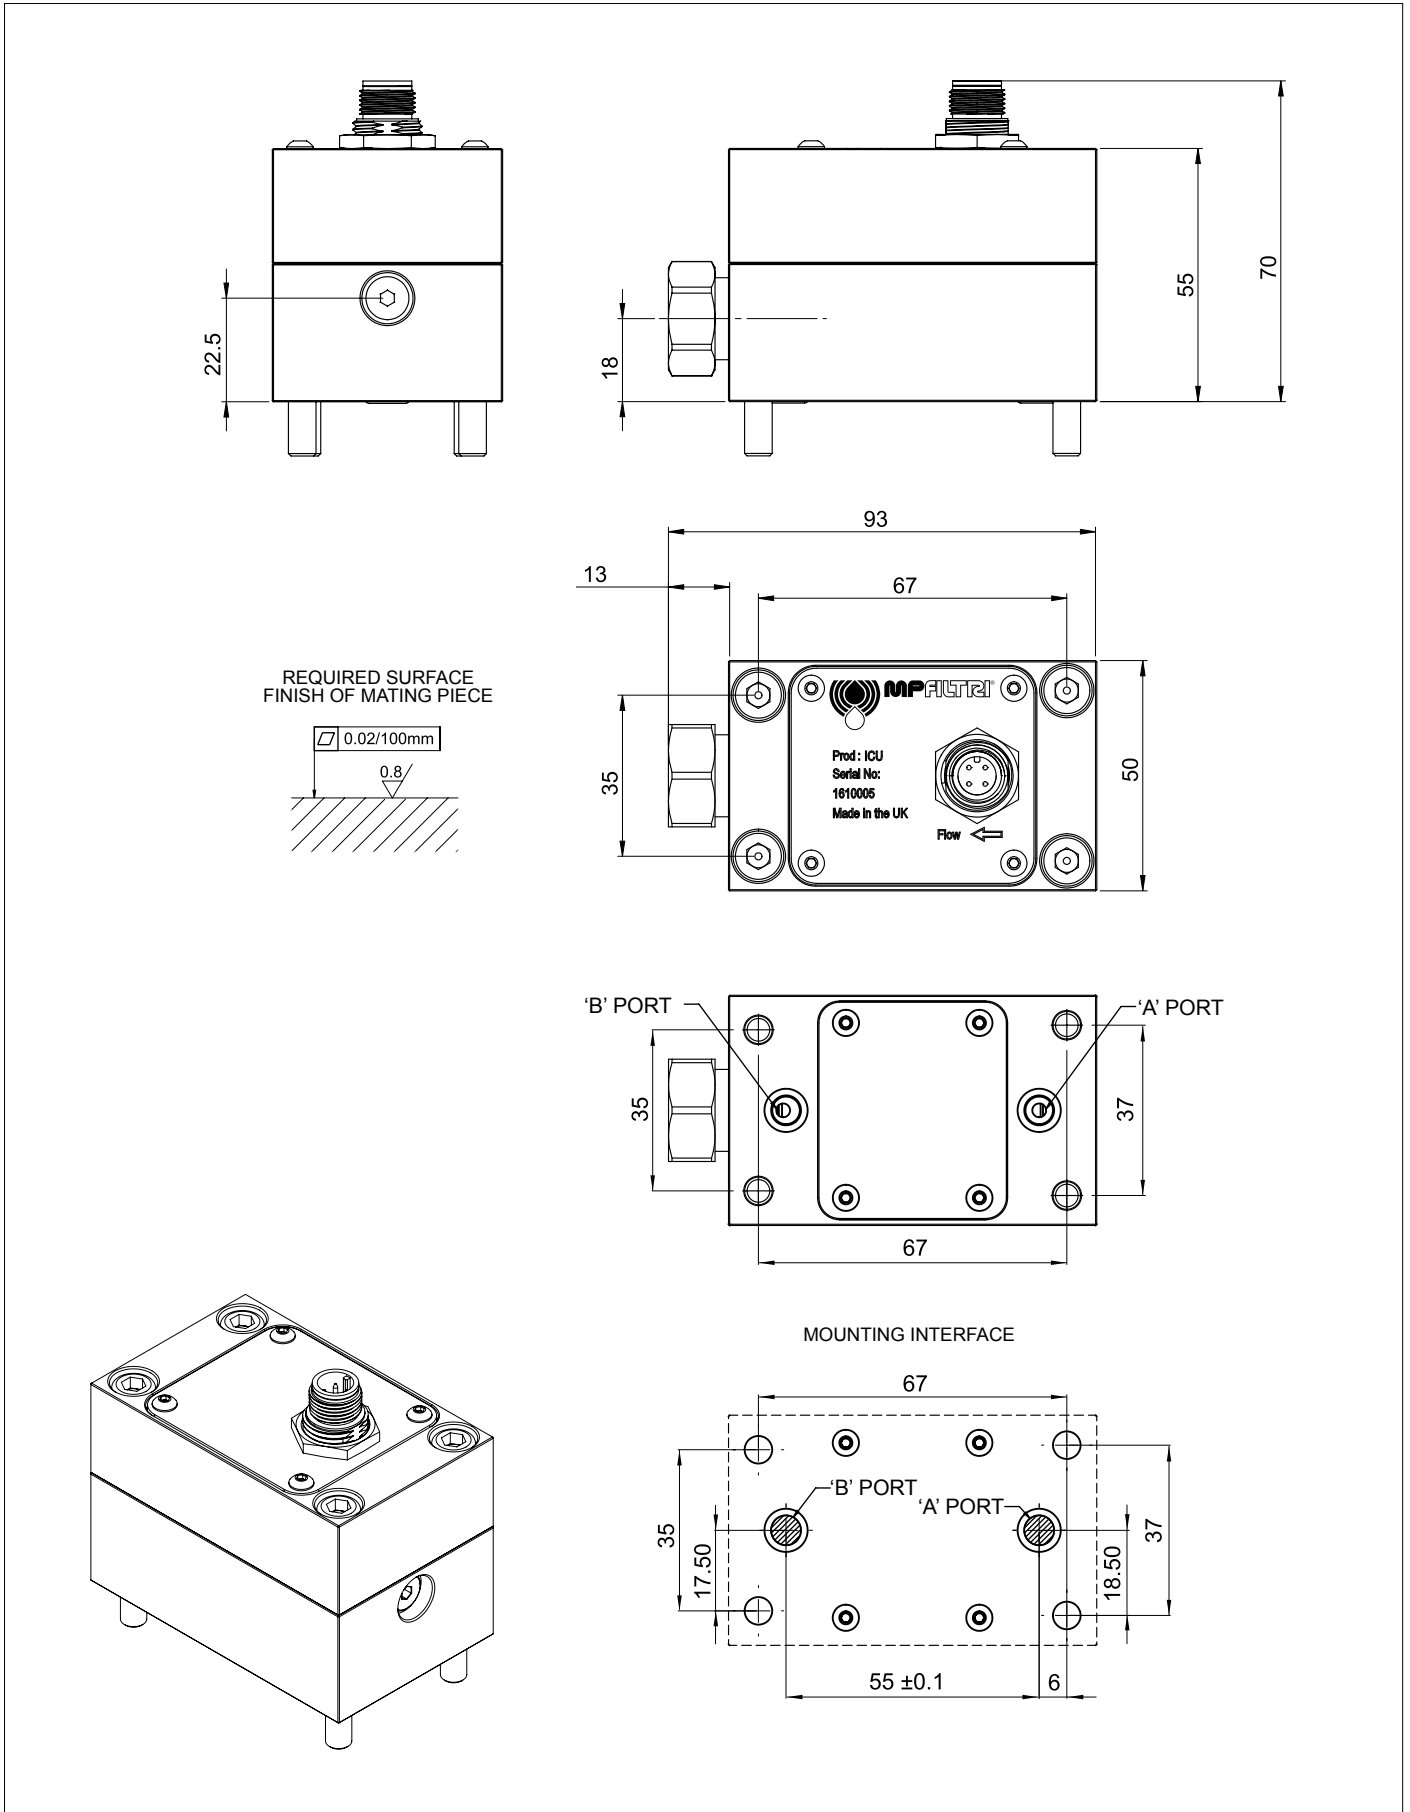

AUTOMATIC PARTICLE COUNTER ICU

Configurations :

ICU 0 M 0 0 G5 P01

Without moisture sensor, Mineral oil, Without keypad/display, 4 to 20mA timed multiplex, Manifold mounted, Standard option

ICU 0 M 0 0 G5 Pxx

Customized version

ACMU

Auxiliary Contamination Monitoring Unit



Description

Contamination Monitoring Products

Auxiliary Contamination Monitoring Unit

Incorporating the ICM, the ACMU is specifically designed for aerated, viscous and/or un-pressurized hydraulic/lubrication systems.

Where can it be used?

- Wind/Tidal/Wave Energy
- Gearbox applications
- Gearbox monitoring
- Offshore & ship systems
- Lubrication & Oil systems
- Mobile Equipment
- Test Benches

When should it be used?

- Entrained air or turbulent flows
- Higher viscosity fluids
- Unpressurized systems

Why should it be used?

- Easy to retro-fit
- Exceptional communication & 4000 test memory
- Reliable & accurate performance

Available versions:

- Cabinet version
- Plate version



Closed Cabinet version
Front/Right facing view



Open Cabinet version
Front facing view



Plate version
Front facing view

Scope of supply

- 1 x ACMU (Specific model will be as per ordered item, 1/4" BSP inlet/outlet ports as standard)
- 1 x 3m Twisted Pair Cable Assembly (Plate version)
- 1 x 5m length twisted pair cable (Cabinet version)
- 2 x 1/4" BSP to 7/16 JIC coupling
- 1 x Hard copy Quick start/wiring installation guide
- 1 x Hard copy Fluid Condition Handbook
- 1 x Digital copy of user guides/software/drivers
- 1 x Hard copy of calibration certificate

See Accessories at page 93

Hydraulic Hoses (External)

Customer to source their own

Re-calibration

Defined by customer Quality Controls recommended 1 year

Technical data

In-Line contamination monitor

ICM with keypad and backlit display and relays

Analysis Range

ISO 4406 Codes 8 to 24
 NAS 1638 Class 2 to 12
 AS4059/ISO 11218 Rev E, Table 1 Size Codes 2-12
 AS4059/ISO 11218 Rev E, Table 2 Size Codes, A: 000 TO 12, B: 00 to 12,
 C: 00 to 12, D: 2 to 12, E: 4-12, F: 7 to 12
 AS4059 Rev F, Table 1 Size Codes 2-12
 AS4059 Rev F, Table 2 Size Codes cpc
 [000 to 12, 00 to 12, 00 to 12, 2 to 12, 4 to 12, 7 to 12]
 GBT14039 Codes 8-24
 GJB420B Size Codes, A: 000 to 12, B: 00 to 12, C: 00 to 12,
 D: 2 to 12, E: 4-12, F: 7 to 12
 Please Note: Lower Limits are Test Volume dependent

Fluid Compatibility / Corrosion Resistance

Hydrocarbon based & Synthetic hydraulic fluids

Circuit Flow Rate

40 ml/min to 400 ml/min

Viscosity range

Max. 1000 cSt - Min. 10 cSt

Communication Options

PLC compatible. RS485, RS232 & CanBus (J1939 typical)

Fluid Temperature (Start Up)

Minimum: Viscosity dependant. Not greater than 1000 cSt
 Maximum: +80 °C

Fluid Temperature (Continuous)

Minimum: Viscosity dependant. Not greater than 1000 cSt
 Maximum: +80 °C

Ambient Temperature (Start Up)

Minimum: -40 °C
 Maximum: +50 °C

Inlet Pressure

Min. Positive pressure
 Max. 50 bar / 725 psi gauge pressure (pump option dependant)

Outlet Pressure

Min. Atmosphere (1013 bar at sea level)
 Max. 3.0 bar / 43.5 psi (gauge pressure)

Moisture Sensing (RH%)

Available with or without moisture sensor

Weight

21 Kg (cabinet version) - 13 Kg (plate version)

Dimensions

Cabinet version:
 Height 562 mm, Depth 226 mm, Width 482 mm
 Plate version:
 Height 410 mm, Depth 186 mm, Width 395 mm

Electric Motor

110V AC, 230V AC, 415V AC, 690V AC

Power Consumption

0.25 kW max

USBi Comms Junction Box

See USBi user guide - cabinet version
 No junction box - plate version
 Industry 4.0 ready with appropriate accessory product


ACMU is supplied with a full software package and digital product information

ACMU GENERAL INFORMATION


LPA View Software

The LPA View software is used with the LPA3, LPA2, CML2, CML4 and ICM particle counters. When connected to LPA View, MP Filtri CMPs can transfer results in realtime, or alternatively, historical results can be downloaded from the CMP's inbuilt memory.

- Runs on Windows XP, 7, and Windows 10
- Full adjustment & control of product settings, test times and alarms
- Easy test report generation
- Trend analysis
- Graphical display options
- Universal format across our contamination monitoring product range

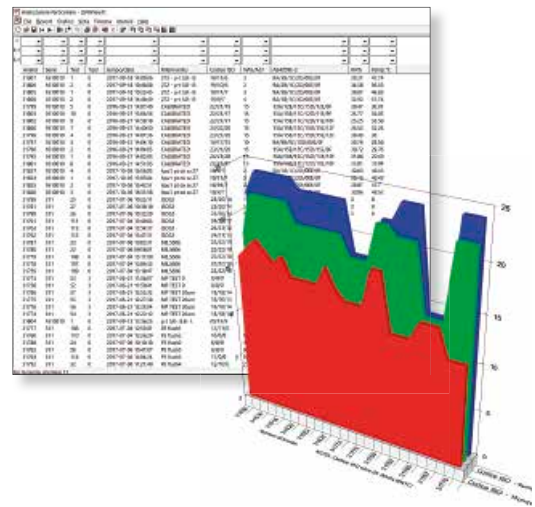

Type of applications

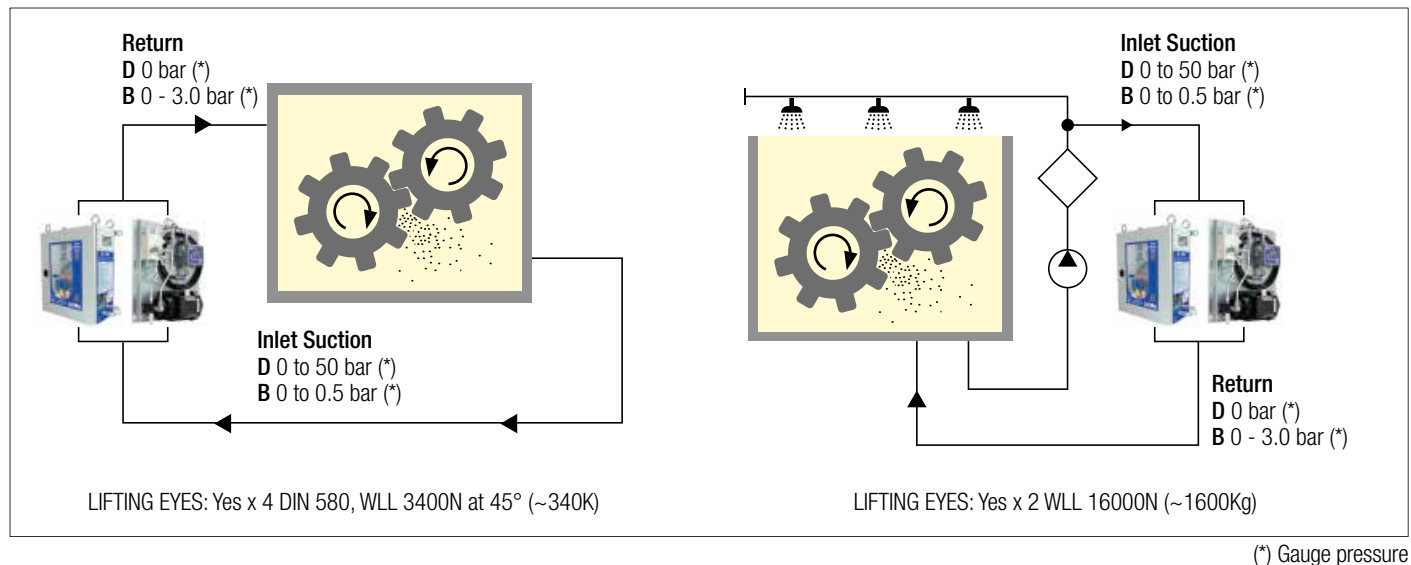


Designation & Ordering code

AUTOMATIC PARTICLE COUNTER ACMU


| | |
|------------------------------|--|
| Series | Configuration example: ACMU W D C S 230V |
| ACMU | |
| Moisture Sensor (RH%) | |
| O | Without moisture and temperature sensor |
| W | With moisture and temperature sensor |
| Pressure Sensor | |
| D | Up to 50 bar inlet (gauge pressure), atmosphere outlet |
| B | 0.5 bar (gauge pressure) {1.0 bar max inlet}, 3.0 bar (gauge pressure) max outlet |
| Type | |
| C | Cabinet version (supplied with 5 metre communication lead) |
| P | Plate mounted version (supplied with ICM 3 metre cable) |
| Version | |
| S | Standard version |
| Motor option | |
| 110V | 110V Motor (Dual frequency 50Hz/60Hz, single phase) |
| 230V | 230V Motor (single phase) |
| 400V | 400V Motor (3 phase) |
| 690V | 690V Motor (3 phase) |

PLATE VERSION

- Priming of pump prior to start up recommended
- Install below level of head of tank
- Keep hose length, inlet and outlet, to minimum lengths
- Max 1000cSt

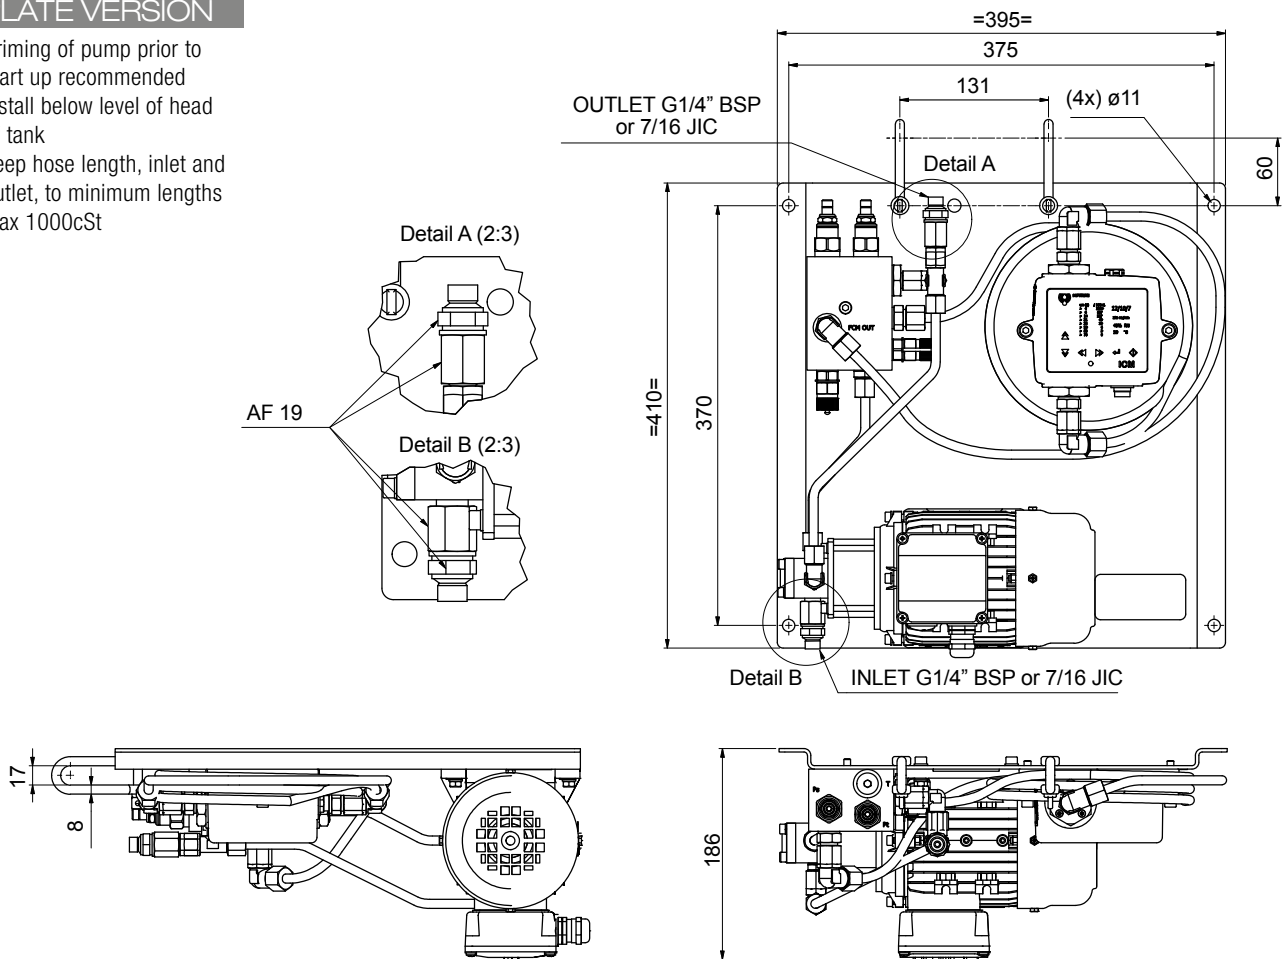

CABINET VERSION

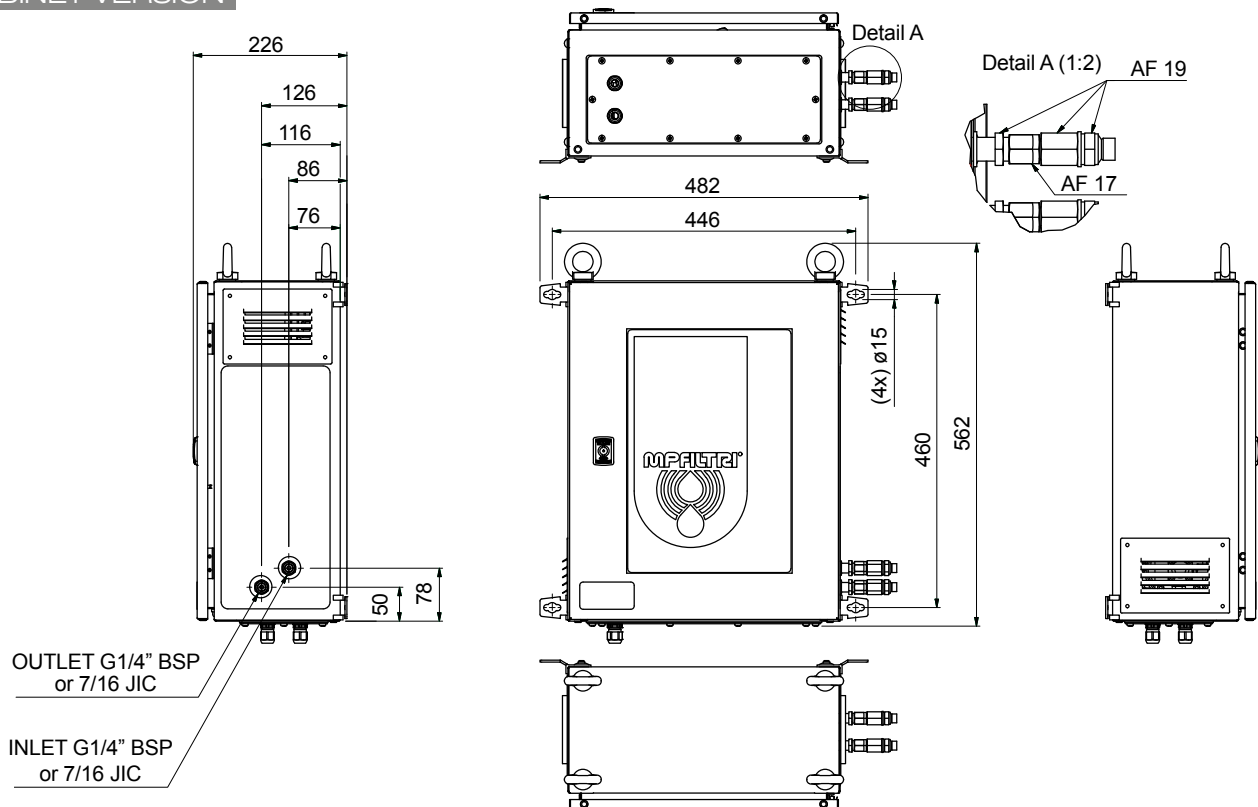

BS110 & BS500

Bottle Samplers - For use with MP Filtri's portable APC



Description

Contamination Monitoring Products

Bottle Samplers

The 110 ml bottle samplers are suitable for off-line and laboratory applications where fluid sampling at point of use is inaccessible or impractical.

A fluid de-aeration facility comes as standard.


> Features & Benefits

- Vacuum feature for de-aeration of fluids
- Compatible with all portable MP Filtri Contamination Monitoring Products
- Strong Laboratory aesthetic
- Transparent outer for visual indication
- Full accessories kit included
- Includes carry case (BS110)
- Contact MP Filtri for use with fluids other than those stated

Scope of Supply

- 1 x 110 ml Bottle Sampling unit
- 1 x Pressure cap
- 1 x Vacuum cap
- 1 x M16x2 microbore pressure hose, 600 mm long
- 1 x 1L waste receptacle
- 1 x 12V, 2A power adapter c/w UK/EU/US/AUS/CN heads
- 1 x pack of disposable dip tubes
- 1 x hand pump
- 1 x length of hose for hand pump
- 3 x 100 ml clear plastic bottles
- 1 x Hard copy of product user guide
- 1 x Digital copy of user guides/software/drivers
- 2 x Thermal printer paper
- 1 x Carry case

See Accessories at page 93



Left facing view



Front facing view



Open case
Front facing view

Technical data

Max. Chamber Pressure

2.5 bar / 36.3 psi only

Min. Chamber Pressure

0.61 bar / 8.85 psi to 0.81 bar / 11.75 psi

For use with....

MP Filtri Portable Contamination Monitoring Products

Supply Voltage

12V, 2 amp

Wetted Parts (Internal)

Aluminium HE30, 303 Stainless Steel, Polyurethane, FPM, Acrylic

On/Off & Stop/Start signals

Switch (Manual Operation)

Hydraulic Hoses (External)

600 mm x 2 mm ID M16x2 microbore pressure hose

Max Flow Rate (ml/min)

Viscosity dependant

Min Flow Rate (ml/min)

Viscosity dependant

Visual Pressure Indicator

No

Weight / Dimensions

7 kg, Height 212 mm, Depth 163 mm, Width 130 mm

Pressure Gauge

No

Pressure Ranges

2.0 bar / 29 psi options

IP Rating

IP50

Fluid Compatibility / Corrosion Resistance

Industrial Hydrocarbon based fluids (typical)

Min Outlet Pressure

1013 bar / 14.7 psi

Max. Fluid Temperature (Continuous)

80 °C / 176 °F

Min Fluid Temperature

Viscosity dependant

Max. Viscosity

400 cSt

Min. Viscosity

1 cSt

Max outlet pressure

2.0 bar / 29 psi options

Min. Continuous Ambient Temperature

10 °C / 50 °F

Max. Continuous Ambient Temperature

55 °C / 131 °F

Power Consumption


24W

Warranty

12 months


Installation

Indoor Use / Laboratory Use

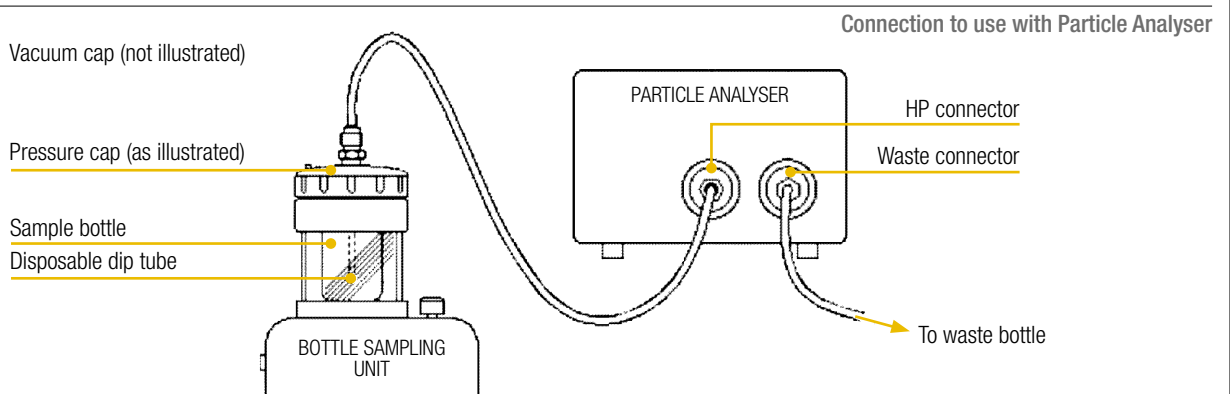

BS110 Bottle Samplers

Dimensions

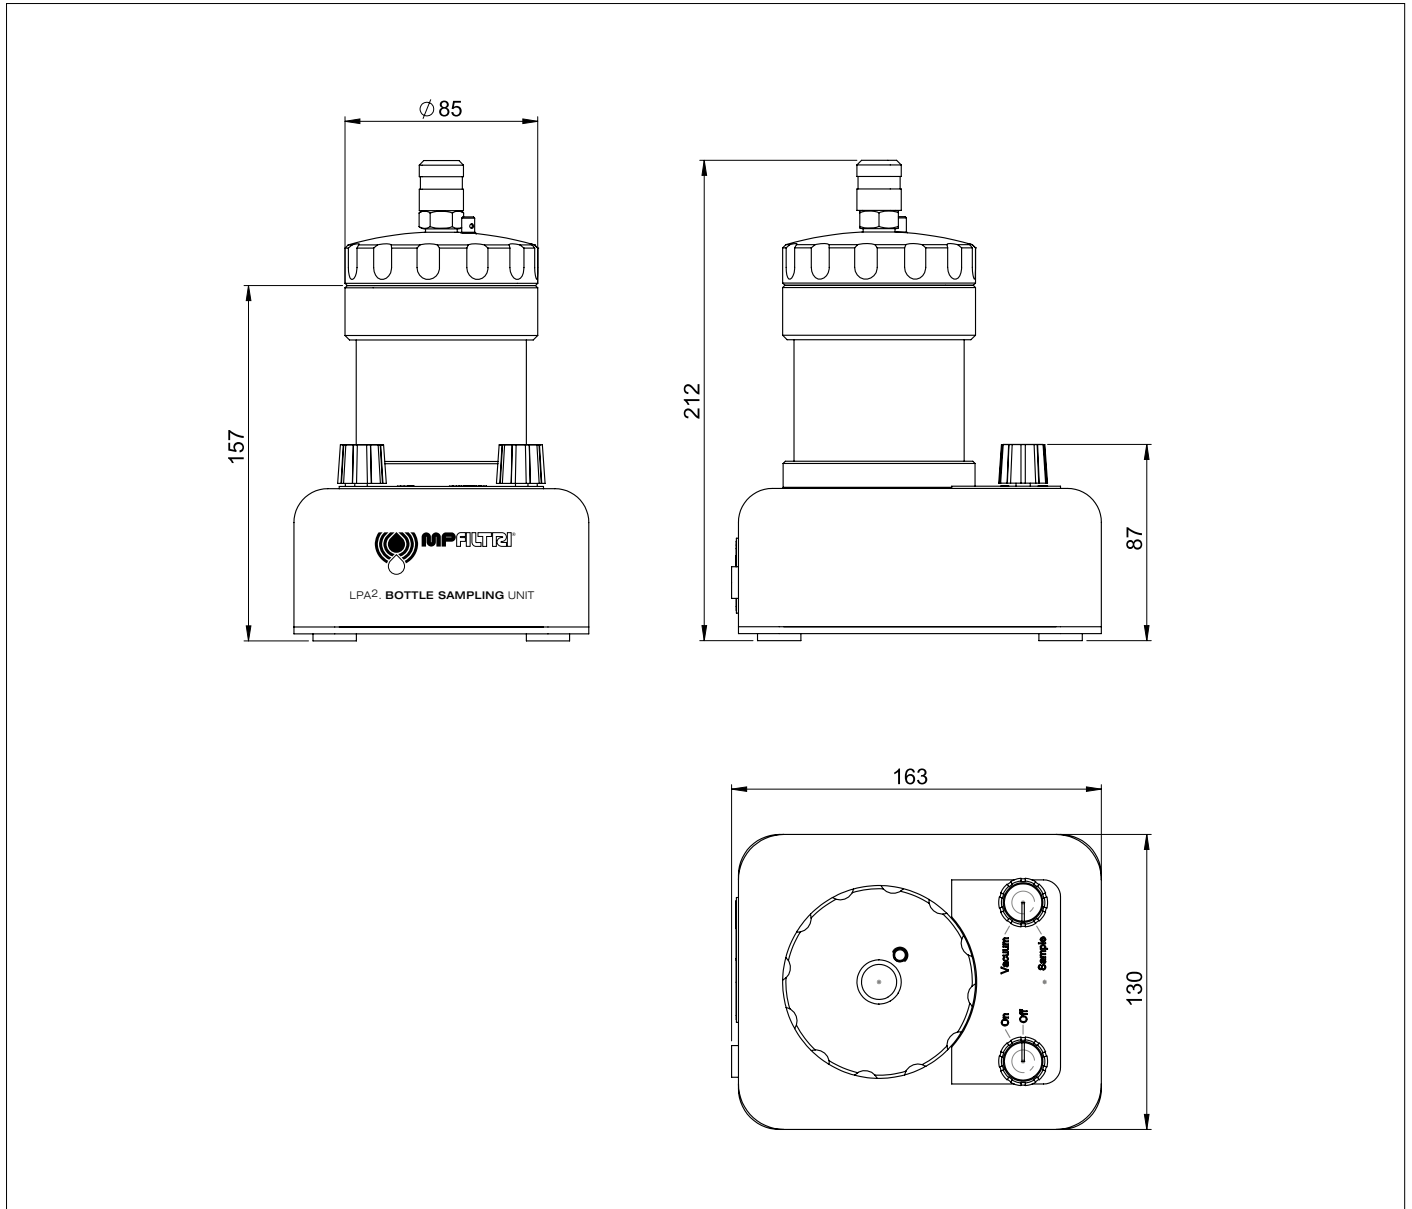

Designation & Ordering code

| BOTTLE SAMPLER BS110 | | | | |
|---------------------------------|-------|----------------------------------|------------------------|-------------|
| Series | BS110 | 110 ml fluid volume | Configuration example: | BS110 M 0 0 |
| Fluid compatibility | M | Mineral oil and synthetic fluids | | |
| Pressure rating | 0 | 2.0 bar | | |
| Pressure cylinder option | 0 | Acrylic cylinder assembly | | |

Description

Contamination Monitoring Products

Bottle Samplers

The 500 ml bottle samplers are suitable for off-line and laboratory applications where fluid sampling at point of use is inaccessible or impractical.

A fluid de-aeration facility comes as standard.

> Features & Benefits


- Vacuum feature for de-aeration of fluids
- Compatible with all portable MP Filtri Contamination Monitoring Products
- Strong Laboratory aesthetic
- Transparent outer for visual indication
- Full accessories kit included
- Contact MP Filtri for use with fluids other than those stated

Scope of Supply

- 1 x 500 ml Bottle Sampling base unit (*)
- 1 x Top cap, pressure/vacuum chamber (*)
- 1 x M16x2 microbore pressure hose, 600 mm long
- 1 x Power adapter
- 1 x UK/EU/US/AUS/CN power lead*
- 3 x 210 ml clear glass bottles
- 2 x 500 ml clear glass bottles
- 1 x Digital copy of user guides/software/drivers

(*) Specific model will be as per ordered item

See Accessories at page 93



Front / Left facing view



Front / Right facing view



Back / Right facing view



Back / Left facing view

Technical data

Max. Chamber Pressure

2.5 bar / 36.3 psi (standard), 4.5 bar / 65.3 psi (high pressure)

Min. Chamber Pressure

0.61 bar / 8.85 psi to 0.81 bar / 11.75 psi

For use with....

MP Filtri Portable Contamination Monitoring Products

Supply Voltage

12V, 5 amp

Wetted Parts (Internal)

Aluminium 6082 T6, 303 Stainless Steel, 316 Stainless Steel.
Seal & Cylinder material optional

On/Off & Stop/Start signals

Switch (Manual Operation)

Hydraulic Hoses (External)

600 mm x 2 mm ID M16x2 microbore pressure hose

Max Flow Rate (ml/min)

Viscosity dependant

Min Flow Rate (ml/min)

Viscosity dependant

Visual Pressure Indicator

Yes

Weight / Dimensions

9 kg, Height 333 mm, Depth 341 mm, Width 264 mm

Pressure Gauge

Yes (only on 4.5 bar / 65.3 psi version)

Pressure Ranges

4.5 bar / 65.3 psi or 2.5 bar / 36.3 psi options

IP Rating

IP50

Fluid Compatibility / Corrosion Resistance

Industrial, aerospace & off-shore control fluids (typical)

Min Outlet Pressure

1013 bar / 14.7 psi

Max. Fluid Temperature (Continuous)

80 °C / 176 °F

Min Fluid Temperature

Viscosity dependant

Max. Viscosity

Not greater than 400cSt (on 2.5 bar version)

Min. Viscosity

1 cSt

Max outlet pressure

Version dependant: 2.5 bar / 36.3 psi for O version
4.5 bar / 65.3 psi for H version

Min. Continuous Ambient Temperature

10 °C / 50 °F

Max. Continuous Ambient Temperature

55 °C / 131 °F

Power Consumption


60W

Warranty

12 months


Installation

Indoor Use / Laboratory Use

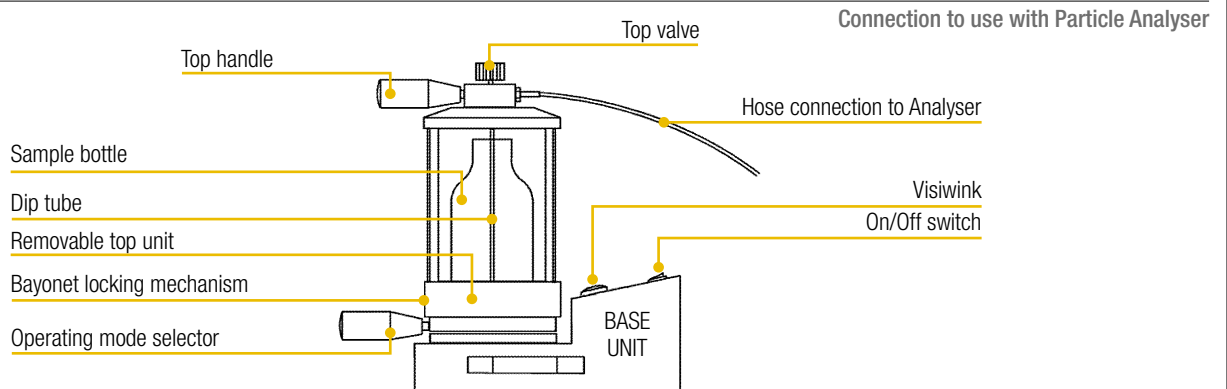

BS500 Bottle Samplers

Dimensions

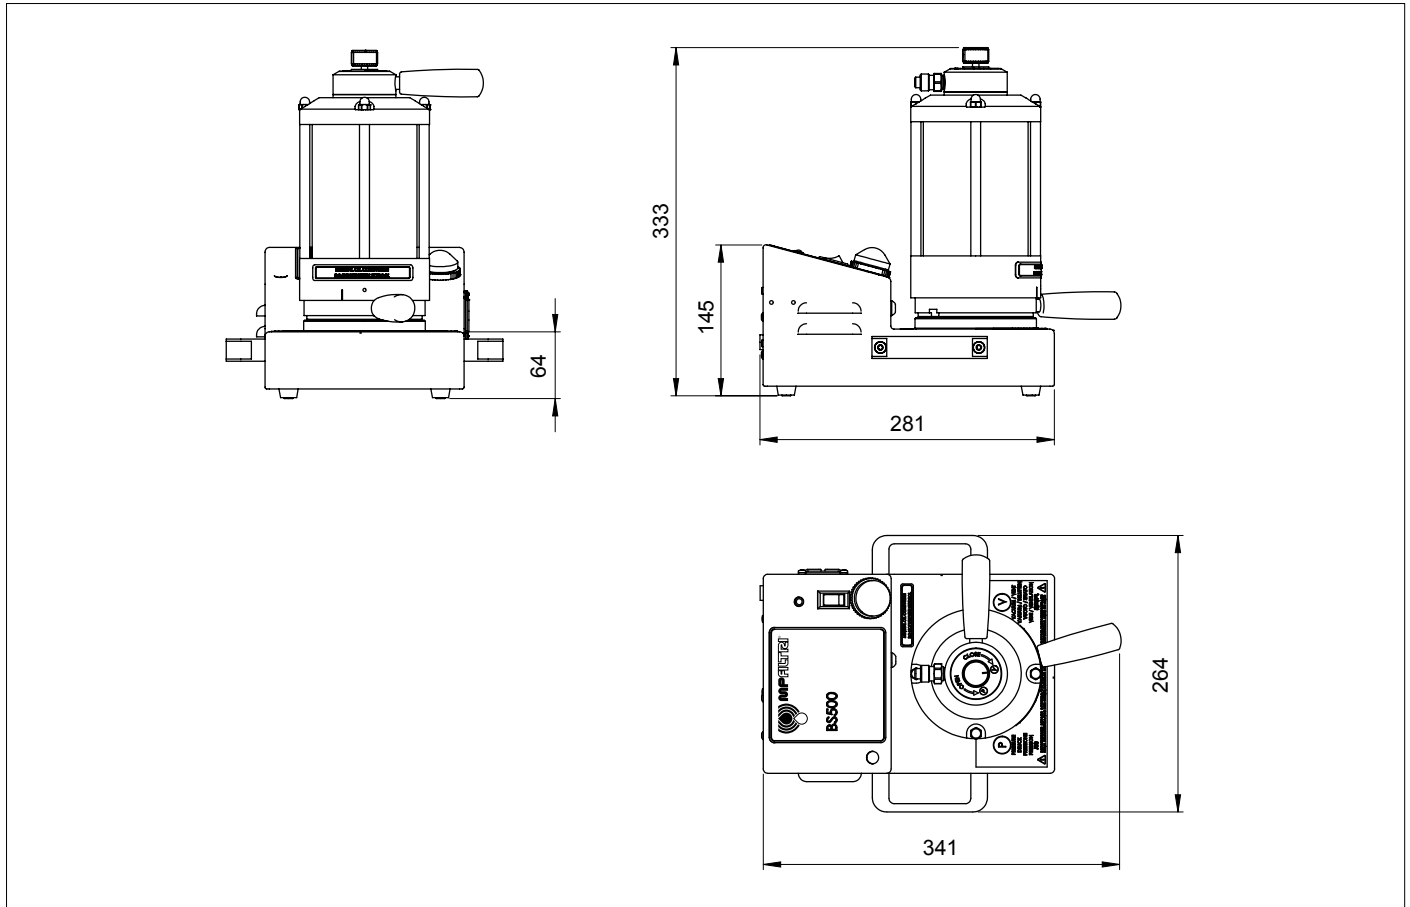

Designation & Ordering code

| BOTTLE SAMPLER BS500 | |
|---|---------------------------------------|
| Series | Configuration example: BS500 V 0 0 UK |
| BS500 500 ml fluid volume | |
| Fluid compatibility | |
| V Mineral oil and synthetic fluids, Subsea and water based fluids | |
| E Phosphate ester and aggressive fluids | |
| S Phosphate ester and aggressive fluids, Mineral oil and synthetic fluids, Subsea and water based fluids | |
| Pressure rating | |
| 0 2.0 bar, standard option | |
| H 4.0 bar, high pressure option (*) | |
| Pressure cylinder option | |
| 0 Acrylic cylinder assembly | |
| S Glass cylinder assembly (**) | |
| Power adapter options | |
| UK UK power adapter | |
| EU European power adapter | |
| US USA power adapter | |
| AU/CN Australasia power adapter | |

(*) = H version only available in BS500 V version

(**) = Glass version only available in BS500 E & S version

HOW SAMPLING

Bottles



At MP Filtri we offer a range of standard & ultra-clean glass bottles for your sampling needs:

100 ml, 210 ml & 500 ml Standard Bottles (not certified clean)

- 100 ml, available in amber glass or clear plastic varieties
- 210 ml, available in clear glass
- 500 ml, available in clear glass

100 ml & 210 ml Ultra Clean Glass Bottles

- Certified to ISO 3722 Hydraulic fluid power
- Fluid sample containers
- Qualifying and controlling cleaning methods
NAS 0 to NAS 00/ AS4059E Table 1 Class 0

Glass Colour

Clear glass provides better visibility of the sample, making de-aeration easier to monitor. Amber glass may reduce the effect of UV light on the sample, reducing the risk of microbial growth and FAME (fatty acid methyl esters) which can be significant in fuel analysis.

DE-AERATION & CLEANLINESS

Samples should be shaken vigorously before use however this causes the sample to become aerated which means leaving it to settle.







The BS500 & BS110 de-aeration facility reduces this settling time, allowing more samples to be analysed thereby increasing productivity.



SAMPLING FACTORS

Below are some of the factors which should be considered when taking a sample. For guidance on sampling procedures refer to ISO 4021 & the product user guide.

- Location of the take-off point
- Homogeneity of the sample
- Local area cleanliness
- Bottle cleanliness
- Equipment cleanliness
- Flushing / Cleaning fluid cleanliness
- Operator clothing & cleanliness
- Air cleanliness

| | | | | | |
|--|--|--|--|---|--|
|  <p>100 µm Dust particle (dead skin)</p> |  <p>40 µm Pollen</p> |  <p>24 µm White blood cell</p> |  <p>10 µm Dust mite faeces</p> |  <p>8 µm Red blood cell</p> |  <p>3 µm E-coli bacteria</p> |
|--|--|--|--|---|--|

HOW SAMPLING

Sample pumps

Hand pump



For systems where there is no practical access to a test point, a sample may need to be taken from an un-pressurized reservoir.

For this occurrence we offer a simple **hand pump device** with both off-line sampling products which provides for clean and efficient sampling.

The design ensures that only the hose is in contact with the sample fluid, providing greater confidence in analysis, and we provide a range of adapters to suit our various bottle sizes.

The pump can be fully dismantled for cleaning and the sample hose plus main seal can be replaced to further improve clean practise.

Ultra clean bottles cleaned to and in accordance with DIN/ISO 5884.


Ultra clean bottles cleanliness verified to ISO 3722.

NAS 1638 cleanliness certification of between Class 00 and Class 0.


The pump and its associated parts are also available as a spares. See spares list page 88-89

| Descriptions | Part Code | Dimensions (mm) |
|--|-----------|-----------------|
| 100 ml - Ultra Clean Bottle (Certified) | P.02 | Ø 50x92 |
| 100 ml - Standard Bottle Brown Glass | BS0016 | Ø 50x91 |
| 100 ml - Clear Plastic Bottle | 7.111 | Ø 51x92 |
| 100 ml - Standard Bottle Tray (72 bottles) | BS0072 | N/A |
| 210 ml - Ultra Clean Bottle (Certified) | P.03 | Ø 65x130 |
| 210 ml - Standard Bottle | 8.054 | Ø 65x122 |
| 500 ml - Standard Bottle | 8.328 | Ø 82x152 |


How it works

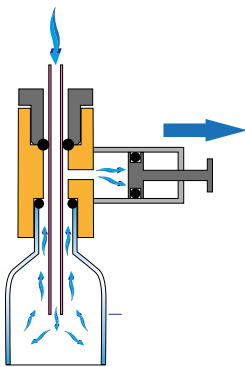

Priming the pump causes a vacuum inside the bottle, syphoning fluid from the reservoir.

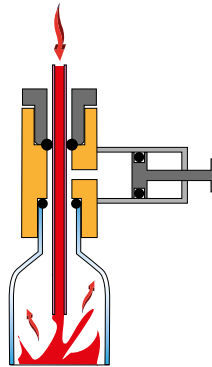

The design of the pump means that only the hose is in contact with the fluid protecting the quality of the sample.



The sample level should always finish below the level of the hose. The bottle can now be removed and capped.

Electric vacuum pump



MP Filtri's Patch Imaging Kit is available with an optional electric pump (spares number: 444.009000). The pump is available with power options for the UK, EU, US, AUS/CN.

See page 93

PIK - Patch Imaging Kit

Patch Sampling and Digital Imaging Kit



Optional Electric Vacuum Pump

Description

Contamination Monitoring Products

High-resolution microscopic visual analysis of contamination in fluids

> Features & Benefits

MP Filtri's new Patch Imaging Kit enables sample-testing of fluids, followed by a full analysis of the contaminants - not only recording and measuring the size and shape of particles under magnification (up to 400x) - but also delivers recording and storage of data and results to your laptop or PC.

Rugged and robust yet perfectly portable, the new Patch Imaging Kit enables fast and accurate testing outside the laboratory.

KEY FEATURES

- High-performance digital microscope, enabling magnification up to 400x
- Sophisticated software enables the measurement and analysis of individual particles
- Full patch testing kit apparatus making it easy to take samples quickly and accurately
- Windows-based software for problem-free installation onto PCs and laptops
- Easy to use without the need for formal training
- Heavy-duty peli-case and laser-cut foam surround for maximum protection and portability
- Simple, step-by-step instructional videos
- Perfectly complements MP Filtri's acclaimed range of portable particle counter products

KIT COMPOSITION

- Heavy-duty orange pelicase
- Pelicase foam insert
- Self-adhesive patch test covers
- Patch test membranes - 1.2 µm
- Spray bottle
- 2 x Stainless steel tweezers
- Hand-pump
- Waste bottle
- 3 x Clean bottles
- Reusable Nalgene filter assembly
- 0.01mm Calibration slides
- Microscope power adaptor
- USB Data stick (includes microscope software and PDF manual)
- Hose pouch
- 1 x Hose - 8 x 6 mm Nalgene vacuum cable
- 1 x Hose - 6 x 4 mm Hand pump sampling cable
- Swift Microscope SW150 and accessories including cable and viewer
- Microscope camera - 1.3MP
- Serial plate for patch imaging kit
- A5 document wallet
- Patch test report cards
- Optional Electric Vacuum Pump - (see page 90)

See Accessories at page 93

(*) pour plus de renseignements, veuillez contacter votre équipe de ventes MP Filtri locale

PRINCIPAL COMPONENTS TECHNICAL DATA

Microscope:

- Digital microscope that connects direct to PC/laptop
- Fully rotatable monocular head for easy shared use, perfect for laboratories and one-on-one instruction
- Available magnification settings of 40X, 100X and 400X
- A dual-illumination system allows examination of both transparent and solid specimens while cool LED lights protect eyesight
- Sleek design with metal carrying handle and base combine with cordless capability to make this microscope practical for field experiments
- The digital microscope allows operators to examine and easily determine the nature and sizes of solid particles inside the fluid.

PARTICLES QUANTITATIVE ANALYSIS

After determination of the nature (and sizes) of particles inside the fluid, it is useful to quantify the contamination inside system.

Determination of quantitative contamination is done by taking fluid sample from the system (preferably in working conditions) and following the sample fluid analysis with an automated particle counter or with a portable particle counter that is linked directly to the system.

They give immediate results according to standard ISO 4406 or NAS 1638. Both particle counters, portable or not, have values and counter indications. Please note the portable particle counters need a minimum pressure to work correctly. They produce immediate results.

Technical data

Sampling

Hand pump
Optional Electric Vacuum Pump

Patch test

Patch test membranes -1.2 µm

Digital analysis

Swift Microscope SW150 and accessories including cable and viewer.
Microscope camera - 1.3MP
Easy-View software for digital analysis

Samples Filtration System

Reusable Nalgene filter assembly
Waste bottle
3 x Clean bottles
Spray bottle

Accessories for identification and test report

Patch test report cards
0.01 mm Calibration slides
Self-adhesive patch test covers

Rigid carrying case

Heavy-duty orange Pelicase

Weight and dimensions

12.5 kg, Height 265 mm, Depth 390 mm, Width 519 mm



Designation & Ordering code

PIK - PATCH IMAGING KIT

| | | | | |
|---|--------------------------------------|------------------------|----------------------------------|----------------------------------|
| Product | | Configuration example: | <input type="text" value="PIK"/> | <input type="text" value="P01"/> |
| PIK | Patch Imaging Kit | | | |
| Pump and Electric supply options | | | | |
| P01 | Hand pump only | | | |
| P02 | Electric Vacuum Pump - UK supply | | | |
| P03 | Electric Vacuum Pump - EU supply | | | |
| P04 | Electric Vacuum Pump - US supply | | | |
| P05 | Electric Vacuum Pump - AUS/CN supply | | | |

FLUID COMPATIBILITY CHARTS

HYDROCARBON AND SYNTHETIC

| Fluid type | Fluid spec. | ICM | | | | LPA | | | | CML | | | | BS110 | | BS500 | | |
|---------------------------------------|-----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--|
| | | M | (W) | N | S | M | (W) | N | S | M | (W) | N | S | M | V | E | S | |
| SYNTHETIC OR MINERAL BASED LIQUIDS | AEROSHELL FLUID 31 (OX-19) | Yellow | Yellow | Green | Green | Yellow | Yellow | Green | Green | Yellow | Yellow | Green | Green | Yellow | Green | Red | Green | |
| | AEROSHELL FLUID 51 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | AEROSHELL FLUID 602 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | CASTROL CONSTAB PS 10W-40 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | DIESEL CALIBRATION OIL 4113 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | FINA POLYGLYCOL FLUID | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | |
| | GEAROL ISO VG 320 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | ISO 32 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | ISO 46 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | ISO 68 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | MIL-H-5606 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | MIL-H-83282 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | MIL-H-87257 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | MOBILGEAR SHC XMP 320 | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | |
| | NATO H-515 (OM-15) | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | NATO H-520 (OM-18) | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | NATO H-537 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | RENOLIN PG 68 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | RENOLIN PG 100 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | RENOLIN PG 150 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | RENOLIN PG 220 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | RENOLIN PG 320 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Yellow | Green | Red | Green | |
| | RENOLIN PG 460 | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | |
| | RENOLIN PG 680 | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | |
| | RENOLIN PG 1000 | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | |
| | RENOLIN UNISYN OL 32 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | RENOLIN UNISYN OL 46 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | RENOLIN UNISYN OL 68 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | RENOLIN UNISYN OL 100 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| | RENOLIN UNISYN OL 150 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | |
| STATOIL HYDRAULIC 131 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | | |
| AERO HF585B | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | | |
| MOBIL DTE 25 | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Red | Green | | |

For special applications or for fluids not mentioned in this table, please contact MP Filtri Technical and Sales Department. Alternatively, visit the services section of our website where we have details on fluid testing and analysis. For guidance on moisture sensing compatibility, contact MP Filtri Technical and Sales Department. Typically conductive fluids are not compatible with the moisture sensor.

■ Compatible
■ Not compatible
■ Contact MP Filtri

Please note that compatibility is based product performance with fluid viscosity at 20 °C in standard dye colourant or natural state. Tests are conducted with the suitable fluid in its pure state. Performance of solutions or mixed emulsions cannot be guaranteed. "Compatibility" is defined as a liquid which does not suffer short or long term degradation as a result of coming into contact with the wetted materials contained within the product. It is also a confirmation that the transparency of the liquid is suitable for the sensitivity of the product range.

For details on the specific product code required for your fluid, contact contact MP Filtri Technical and Sales Department.

FLUID COMPATIBILITY CHARTS

OFFSHORE

| Fluid type | Fluid spec. | ICM | | | | LPA | | | | CML | | | | BS110 | | BS500 | |
|--|---------------------------|-----|--------|--------|--------|-----|--------|--------|--------|-----|--------|--------|--------|-------|-----|-------|-------|
| | | M | (W) | N | S | M | (W) | N | S | M | (W) | N | S | M | V | E | S |
| OFFSHORE & SELECTED WATER BASED FLUIDS | HW443 | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | HW443R | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | HW453 | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | HW540 | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | HW540 | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | PELAGIC 50 | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | PELAGIC 100 | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | TRANSAQUA HT | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | TRANSAQUA HT2 | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | FRESH WATER | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | DE-IONISED WATER | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | SEAWATER | Red | Red | Yellow | Yellow | Red | Red | Yellow | Yellow | Red | Red | Yellow | Yellow | Red | Red | Red | Green |
| | HOUGHTO-SAFE 273 CTF | Red | Red | Yellow | Yellow | Red | Red | Yellow | Yellow | Red | Red | Yellow | Yellow | Red | Red | Red | Green |
| | HOUGHTO-SAFE BC24046 | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | WATER GLYCOL HFC 46 | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Red | Red | Red | Green |
| | LF2100 (99%WATER, 1% MIX) | Red | Red | Yellow | Yellow | Red | Red | Yellow | Yellow | Red | Red | Yellow | Yellow | Red | Red | Red | Green |
| SV3 | Red | Red | Yellow | Yellow | Red | Red | Yellow | Yellow | Red | Red | Yellow | Yellow | Red | Red | Red | Green | |

AGGRESSIVE FLUIDS

| Fluid type | Fluid spec. | ICM | | | | LPA | | | | CML | | | | BS110 | | BS500 | |
|---|---------------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|-------|-------|-----|-------|-------|
| | | M | (W) | N | S | M | (W) | N | S | M | (W) | N | S | M | V | E | S |
| PHOSPHATE ESTHER & AGGRESSIVE LIQUID APPLICATIONS | HYJET IV | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green |
| | HYJET V | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green |
| | SKYDROL 500B | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green |
| | SKYDROL 500B4 | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green |
| | SKYDROL LD4 | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green | Red | Red | Red | Green |

- Compatible
- Not compatible
- Contact MP Filtri

For special applications or for fluids not mentioned in this table, please contact MP Filtri Technical and Sales Department. Alternatively, visit the services section of our website where we have details on fluid testing and analysis. For guidance on moisture sensing compatibility, contact MP Filtri Technical and Sales Department. Typically conductive fluids are not compatible with the moisture sensor.

Please note that compatibility is based product performance with fluid viscosity at 20 °C in standard dye colourant or natural state. Tests are conducted with the suitable fluid in its pure state. Performance of solutions or mixed emulsions cannot be guaranteed. "Compatibility" is defined as a liquid which does not suffer short or long term degradation as a result of coming into contact with the wetted materials contained within the product. It is also a confirmation that the transparency of the liquid is suitable for the sensitivity of the product range.

For details on the specific product code required for your fluid, contact contact MP Filtri Technical and Sales Department.

FLUID COMPATIBILITY CHARTS

FUELS

| Fluid type | Fluid spec. | ICM | | | | LPA | | | | CML | | | | BS110 | | BS500 | | |
|------------|--------------------|--------|--------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|-------|--------|-------|-------|--|
| | | M | (W) | N | S | M | (W) | N | S | M | (W) | N | S | M | V | E | S | |
| FUELS | JET A-1 | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | JET A | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | JET B | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | JP1 | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | JP5 | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | JP6 | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | JP7 | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | JP8 | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | JPTS | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | FT JET FUEL | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | GTL JET FUEL BLEND | Yellow | Yellow | Green | Green | Red | Red | Green | Green | Red | Red | Green | Green | Green | Yellow | Red | Green | |
| | DIESELS | Green | Green | Green | Green | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Green | Green | Green | Green | |

BIO FLUIDS

| Fluid type | Fluid spec. | ICM | | | | LPA | | | | CML | | | | BS110 | | BS500 | | |
|--|----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|-------|-------|--|
| | | M | (W) | N | S | M | (W) | N | S | M | (W) | N | S | M | V | E | S | |
| BIODEGRADABLE FLUIDS & VEGETABLE OILS | BIO-ETHANOL | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Green | Green | Green | |
| | BIO-DIESEL | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Green | Green | Green | |
| | PLANTOHYD N SERIES | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Green | Green | Green | |
| | PANOLIN HLP SYNTH 22 | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Green | Green | Green | |
| | SUNFLOWER OIL | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | |
| | RAPESEED OIL | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | |
| | CORN OIL | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | |
| | GROUND NUT OIL | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green | |
| | CAT BIO HYDO HEES | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Yellow | Green | Green | Green | |

■ Compatible
■ Not compatible
■ Contact MP Filtri

For special applications or for fluids not mentioned in this table, please contact MP Filtri Technical and Sales Department. Alternatively, visit the services section of our website where we have details on fluid testing and analysis. For guidance on moisture sensing compatibility, contact MP Filtri Technical and Sales Department. Typically conductive fluids are not compatible with the moisture sensor.

Please note that compatibility is based product performance with fluid viscosity at 20 °C in standard dye colourant or natural state. Tests are conducted with the suitable fluid in its pure state. Performance of solutions or mixed emulsions cannot be guaranteed. "Compatibility" is defined as a liquid which does not suffer short or long term degradation as a result of coming into contact with the wetted materials contained within the product. It is also a confirmation that the transparency of the liquid is suitable for the sensitivity of the product range.

For details on the specific product code required for your fluid, contact contact MP Filtri Technical and Sales Department.

SPARE PARTS LIST

| Description (product types) | Ordering Code |
|--|------------------|
| Calibration Verification Fluid (requires use of Bottle Sampling device) | PCCF |
| CMP Hydraulic connections / options: | |
| M16x2 microbore pressure hose, plated steel, 600 mm (M versions) | 95.Y30Y30X261060 |
| M16x2 microbore pressure hose, plated steel, 1500 mm (M versions) | 95.Y30Y30X261150 |
| M16x2 microbore pressure hose, stainless steel, 600 mm (N versions) | 95.Y30Y30X161060 |
| M16x2 microbore pressure hose, stainless steel, 1500 mm (N versions) | 95.Y30Y30X161150 |
| Waste Hose (M versions), 2000 mm - Brass / FKM | SK0014S30 |
| Waste Hose (N versions), 2000 mm - Stainless Steel / FKM | SK0014S30N |
| Waste Hose (S versions), 2000 mm - Stainless Steel / FFKM | SK0014S30S |
| Offline Hose Assembly | 481.027000 |
| Pouch for pressure hose/waste hose | 7.106 |
| M16x2 M to F Coarse Screen Filter (M and N versions) | SK0040 |
| G1/4 F to F coarse screen filter (M/N/S versions) | 11.615 |
| M16x2 F to F Coarse Screen Filter (S versions) | SK0041 |
| Airbus adaptor with test point | SKAA02 |
| Waste Bottle: | |
| 1 Litre - Round | SK0012 |
| 1 Litre - Square (for use with CB0001) | SK0013 |
| Communications: | |
| Serial cable to USB converter | SK0026 |
| PC Download cable | 6.123 |
| USB A-B cable | 11.081 |
| Bluetooth Portable Printer | 482.016000 |
| 1m USB A to C Cable | 443.074000 |
| ICMKAZ2 to USBi conversion kit - not to be used in zoned areas | 11.645 |
| USB stick with all user guides and LPA-View Software | 13.055001 |
| Offline sampling equipment: | |
| Disposable Dip tubes - pack of 50 | BS0018 |
| Hand Pump | BS0020 |
| Hand Pump Hose - 1000 mm | BS0022 |
| Bottle Sampler hand pump and hose kit | BS0024 |
| 100 ml Standard Brown Glass Bottle | BS0016 |
| Tray of 72 x 100 ml Standard Brown Glass Bottles | BS0072 |
| 100 ml Clear Plastic Bottle | 7.111 |
| Box of 20 x 100 ml Clear Plastic Bottles | 7.112 |
| 250 ml Standard Clear Glass Bottle | 8.054 |
| Box of 20 x 250 ml Standard Clear Glass Bottles | 8.054-20 |
| 500 ml Standard Clear Glass Bottle | 8.328 |
| DIN/ISO5584/ISO3722 certified clean, 100 ml clear glass bottle | P.02 |
| DIN/ISO5584/ISO3722 certified clean, 100 ml clear glass bottle - Box of 25 | P.0225 |
| DIN/ISO5584/ISO3722 certified clean, 250 ml clear glass bottle | P.03 |
| DIN/ISO5584/ISO3722 certified clean, 250 ml clear glass bottle - Box of 25 | P.0320 |

SPARE PARTS LIST

| | LPA2 | LPA3 | CML2 | CML4 | ICM 4.0 | ICM 2.0 | ICMKAZ2 | ACMU | PIK | BS110 | BS500 | ICMUSBi |
|--|------|------|------|------|---------|---------|---------|------|-----|-------|-------|---------|
| | • | • | • | • | | | | | | • | • | |
| | | | | | | | | | | | | |
| | • | • | • | • | • | • | • | | | • | • | |
| | • | • | • | • | • | • | • | | | | | |
| | • | • | • | • | • | • | • | | | • | • | |
| | • | • | • | • | | | | | | | | |
| | • | • | • | | | | | | | | | |
| | • | • | • | | | | | | | | | |
| | | | | • | | | | | | | | |
| | • | • | | • | | | | | • | | | |
| | • | • | • | • | | | • | | | | | |
| | | | | | • | • | | | | | | |
| | • | • | • | • | | | • | | | | | |
| | • | | | | | | | | | | | |
| | | • | • | | | | | | | • | | |
| | • | • | | • | | | | | | | | |
| | | | | | | | | | | | | |
| | • | | • | | | | | | | | | |
| | • | | • | | | | | | | | | |
| | | • | | | | | | | | | | • |
| | | | | • | | | | | | | | |
| | | | | • | | | | | | | | |
| | | | | | | | • | | | | | • |
| | • | • | • | • | • | • | • | • | • | • | • | • |
| | | | | | | | | | | | | |
| | • | | | | | | | | | | | |
| | • | • | | | | | | | | | | |
| | • | • | | | | | | | | | | |
| | • | • | | | | | | | | | | |
| | • | • | | | | | | | | | | |
| | • | • | | | | | | | | | | |
| | | • | | | | | | | | | | |
| | | • | | | | | | | | | | |
| | | • | | | | | | | | | | |
| | • | • | | | | | | | | | | |
| | • | • | | | | | | | | | | |
| | | • | | | | | | | | | | |
| | | • | | | | | | | | | | |

SPARE PARTS LIST

| Description (product types) | Ordering Code |
|---|---------------|
| Power Options: | |
| 12V. 2A Power Adapter - UK/EU/US/CN/AUS | 6.209 |
| 19V. 3A Power Adapter | 61.034000 |
| 12V. 5A Power Adapter for 500 ml Bottle Sampler | 8.029 |
| UK Lead for 8.029 | 8.031 |
| EU Lead for 8.029 | 8.032 |
| US Lead for 8.029 | 8.030 |
| CN/AUS Lead for 8.029 | 8.072 |
| Other: | |
| Thermal printer paper 57x33 mm | 63.083000 |
| Thermal paper roll 57x51 mm | 6.160 |
| LPA2 Aviation Edition travel case without foam | TC0005 |
| Replacement foam insert for TC0005 | 6.300 |
| Heavy-duty orange pelicase | 443.061E20 |
| Pelicase foam insert | 443.062020 |
| Self-adhesive patch test covers | 444.029001 |
| Patch test membranes - 1.2 micron filter | 444.010000 |
| Spray bottle | 444.018J10 |
| Stainless steel tweezers | 444.011120 |
| Waste bottle | 444.032J00 |
| Reuseable Nalgene filter assembly | 444.024000 |
| 0.01 mm Calibration slides | 444.025000 |
| Microscope power adaptor | 444.033000 |
| Hose - 8 x 6 mm Nalgene vacuum cable | 444.026000 |
| Hose - 6 x 4 mm Hand pump sampling cable | 7.107 |
| Microscope camera - 1.3 MP | 444.016010 |
| Serial plate for patch imaging kit | 484.314000 |
| A5 document wallet | 444.027001 |
| Patch test report card | 444.028001 |
| Electric vacuum pump | 444.009000 |
| CML Carry Bag | 10.011 |
| LPA3 Carry Bag | 63.088000 |
| LPA2 Carry Bag | CB0001 |
| Black support case (without contents) | BS0040 |
| Heavy Duty Travel Case for Bottle Sampler | TC00055B |

Accessories

RDU 2.0**ICM-USBi
ICM-ETHi****ICM-FC1****SK0040****FLUID SAMPLING BOTTLES****PRESSURE & WASTE HOSES****444.009000**

Description

Remote Display Unit


Depending on your application, access and visibility of particle counting equipment can sometimes be an issue. The ICM-RDU has specially been developed to dovetail with its parent ICM 2.0. So you have the option to control and monitor the ICM 2.0 remotely. Supplied with a 10m cable as standard.

Features & Benefits

- Large backlit display
- Keypad interface
- Robust die-cast aluminium construction

Scope of Supply

- 1 x ICMRDU2.0
- 1 x 10m Twisted Pair Cable Assembly
- 1 x Digital copy of user guides/software/drivers



Status LED


All RDU 2.0 versions have a multicolour indicator on the front panel, which is used to indicate the status or alarm state. RDU-K versions also have a screen that changes colour. The alarm thresholds can be set from LPA-View via the serial interface.

Screen and multicolor indicators

- Green indicates that the test result passed, i.e. none of the alarm thresholds were exceeded
- Yellow indicates that the lower cleanliness limit was exceeded, but not the upper one
- Red indicates that the upper cleanliness limit was exceeded
- Blue indicates that the upper water content limit was exceeded
- Red/Blue Alternating indicates both cleanliness and water content upper limits exceeded
- Violet indicates that the upper temperature limit was exceeded



Dimensions

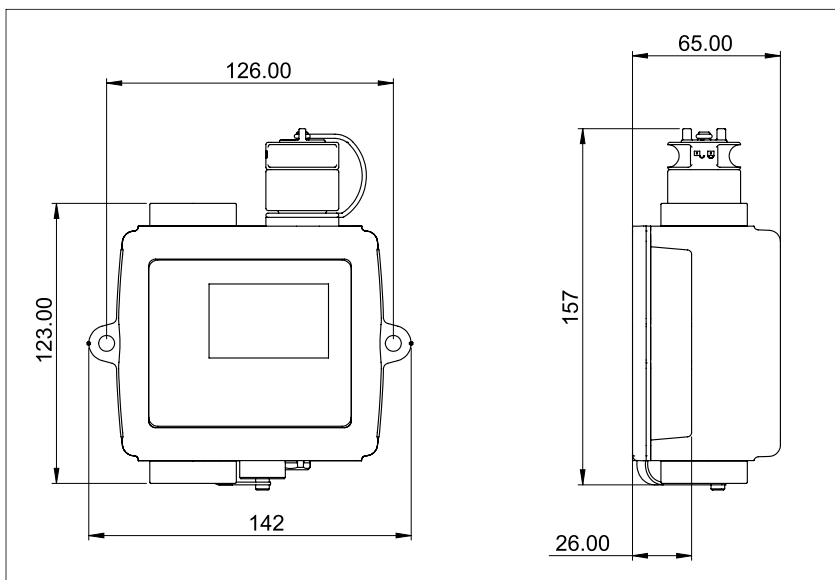

Designation & Ordering code

RDU 2.0

Configuration:

Description

Electric Vacuum Pump

MP Filtri's Patch Imaging Kit is available with an optional electric pump (spares number: 444.009000). The pump is available with power options for the UK, EU, US, AUS/CN.

Used with PIK



Designation & Ordering code

444.009000

Configuration:

ICM-FC1

Description

Flow Control Valve


The FC1 is a pressure compensated flow control valve which can operate across a range of fluid types and is compatible with the ICM where flow rate exceeds operating parameters. Max pressure rating 400 bar at normal hydraulic system temperatures.

> **Features & Benefits**

- Pressure compensated
- Regulates flow to within ICM specification
- Various connection options
- Viscosity independent
- Hexagonal form for ease of installation



Dimensions

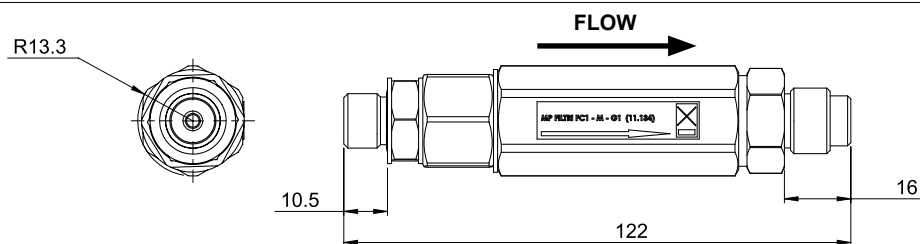

Designation & Ordering code

ICM-FC1

| | | | |
|--|--|--|--|
| Series | Configuration example: <input type="text" value="ICM-FC1"/> <input type="text" value="M"/> <input type="text" value="G1"/> | | |
| ICM-FC1 | | | |
| Fluid compatibility | | | |
| M Mineral oil | | | |
| N Offshore fluids | | | |
| S Phosphate ester | | | |
| Connections | | | |
| G1 ICM complete with M16x2 pressure test point connections fitted | | | |
| G3 1/4" BSP - Female port | | | |
| G4 7/16" UNF - Female port | | | |

Description

Auxiliary Communication Options

We offer four auxiliary communication devices to operate with the ICM 2.0:

ICM-USBi:

Two auxiliary communication devices are available to order with the ICM. A USB interface which allows for communication via a laptop (RS485 to RS232 converter) & an ethernet device for remote access via a network hub.

ICM-ETHi:


An ethernet device enables remote access via a network hub via Com Port redirection software.

Both devices can transmit power to the ICM/RDU electrical circuit using a DC power adapter.

The USBi has the additional benefit of supplying power via the USB cable directly. Both devices come with a DC Power adapter and 3m twisted pair cable as standard.

> Features & Benefits

- Compact
- Off the shelf solution
- Robust aluminium construction



Plug and play technology


- Robust aluminium construction
- Compact
- Provided with a twisted cable conductors 8, length 3m.
- All devices can transmit power to the ICM/RDU electrical circuit using the supplied DC power adapter.

ICM-USBi



ICM-ETHi



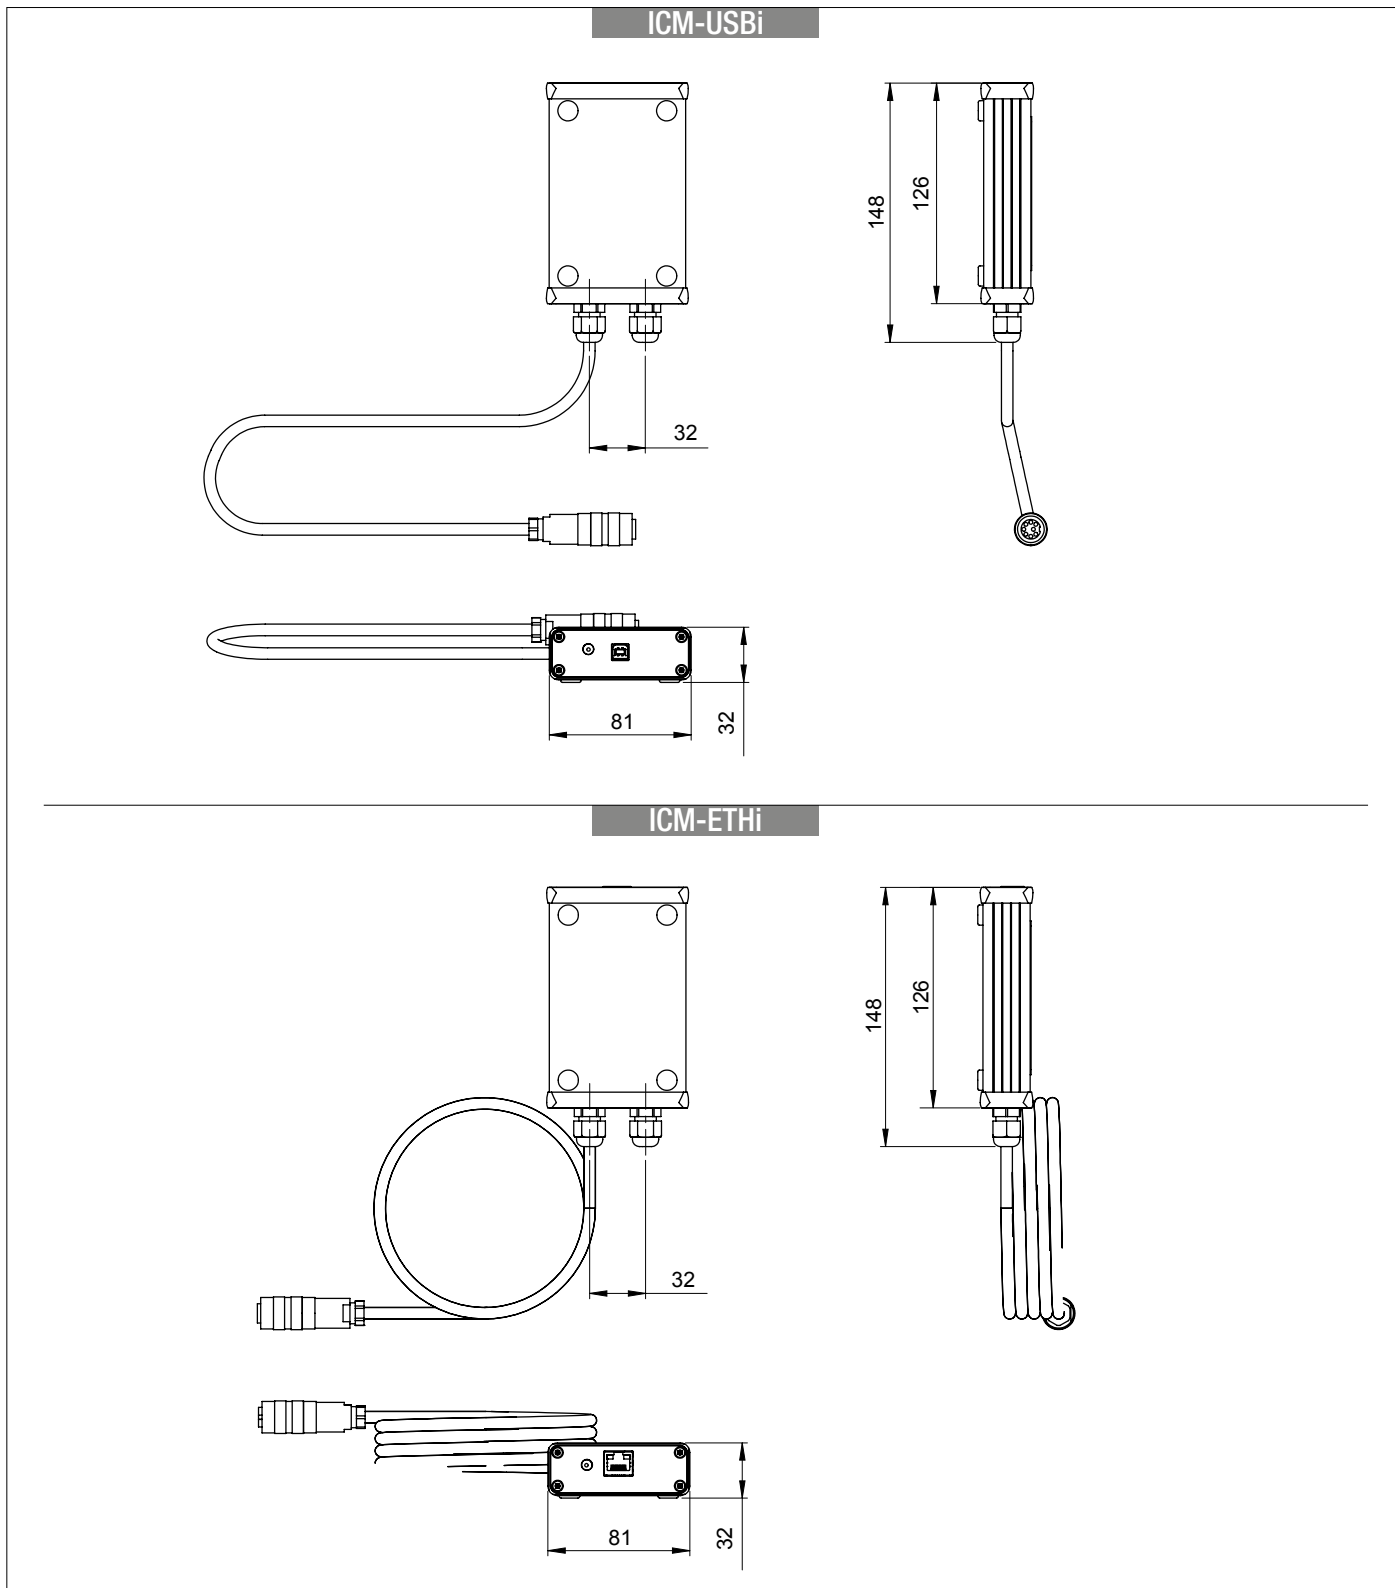

Designation & Ordering code

ICM-USBi & ICM-ETHi

- Configuration:
- ICM USBi
 - ICM ETHi

Description

Screen Filter

The SK0040 coarse screen filter adapter is designed to limit the ingress of large particles into MP Filtri's range of Contamination Monitoring Products (CMP).


> Features & Benefits

- Part number: SK0040
- Inlet connection: M16x2 male test point
- Outlet connection: M16x2 female thread form
- Pressure rating: 400 bar
- Mesh rating: 600 µm



Used with LPA3, LPA2, CML2, CML4 and ICM2.0

Dimensions

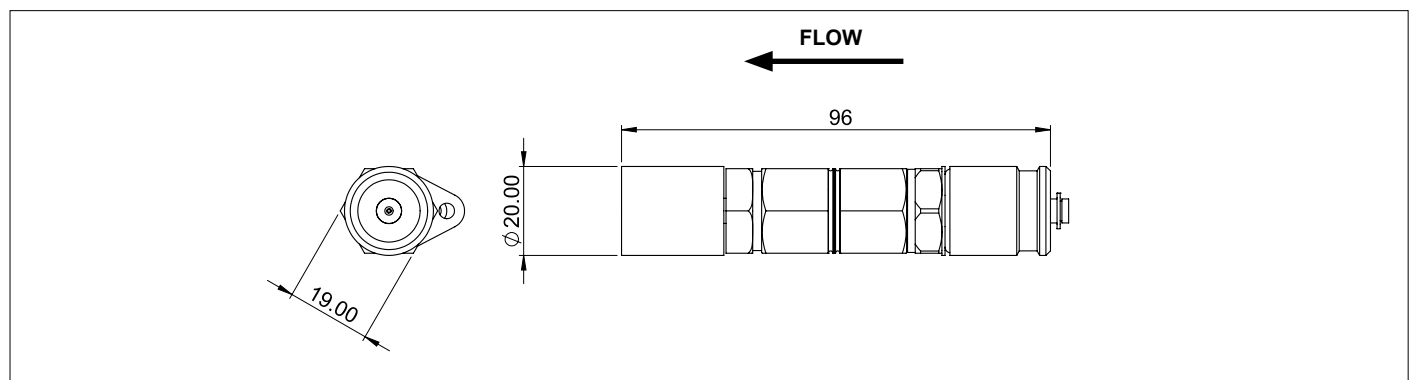

Designation & Ordering code

SK0040

Configuration: SK0040

Description

> Features & Benefits

We supply laboratory standard and certified clean sampling bottles. 100 ml, 210 ml and 500 ml bottle sizes are available and are easily incorporated into our range of bottle samplers.



Designation & Ordering code

BS110 - BS500

For Ordering Codes see page 88-91

PRESSURE & WASTE HOSES

Description

> Features & Benefits

Replacement hoses.

Pressure Hose

M16x2 Micro bore pressure hose by length (various available) long Plated steel (alternative material options available)

Pressure hoses are able to connect MP Filtri products directly to your hydraulic systems.

- LPA3
- LPA2
- CML2
- CML4
- BS110 - BS500
- ICM 2.0

**Waste Hose**

Length: 2000 mm

OD: 8 mm

ID: 5 mm

Standard material: Polyurethane*

Fitting type: Quick release coupling (brass as standard)

*Other versions available to suit the M, N and S versions of CMP

- LPA3
- LPA2
- CML2
- CML4



Designation & Ordering code

HOSES

For Ordering Codes see page 88-91

Filtered to perfection

Our mobile filtration units provide the perfect solution for the oil maintenance of your lubrication and hydraulic fluids in off-line filtration applications.

Benefits:

- **Versatile and compact design**
- **Filtering and continuous cleaning of systems**
- **Removal of water from hydraulic systems (when fitted with a spin on filter)**
- **Particle counting to determine the Contamination Class according to ISO 4406, NAS 1638, AS4059**

Applications:

- **For oil changes, initial filling and flushing cycles in hydraulic and lubrication systems**
- **Pulp and paper mill equipment**
- **Construction machinery**
- **Large central hydraulic power units**
- **Injection moulding equipment**
- **Stamping presses**

Mobile filtration units

UFM 015



UFM 041



UFM 051



UFM 091-181-919



FTU



| | |
|---------|----------|
| UFM 015 | page 103 |
| UFM 041 | 113 |
| UFM 051 | 119 |
| UFM 091 | 125 |
| UFM 181 | 131 |
| UFM 919 | 137 |
| FTU 080 | 143 |

UFM 015

Mobile filtration unit 15 l/min flow rate



Description


Mobile filtration units

The UFM 015 is a portable oil transfer/filtration unit, specifically designed for both filling/transferring hydraulic oils from containers to the hydraulic tank as well as filtering and cleaning hydraulic systems.

The unit utilises Spin-On standard cartridge (supplied as option), available in two lengths, thus increasing the dirt holding capacity and lowering pressure drop of the unit.

The unit has the flexibility in being able to offer a wide range of medias and micro ratings to suit any application.

The unit is very compact and lightweight.



> Features & Benefits

- Handle size
- Light
- Easy to use
- Easy maintenance
- Reliable
- Absolute filtration



Technical data

| | |
|---|--|
| <p>Pump Gear pump</p> | <p>Protection Class IP55</p> |
| <p>Electric Motor 0.18 kW 230 V single phase electric motor</p> | <p>Seal NBR</p> |
| <p>Flow (l/min) 15 l/min - 1450 r.p.m.</p> | <p>Fluid Compatibility Mineral Oil - Other on request</p> |
| <p>Max. Operation Pressure 4.0 bar</p> | <p>Suction hose lance DN18 length 2500 mm DN/OD20 length 400 mm</p> |
| <p>Viscosity range Min. operation 10 cSt Max. operation 200 cSt Max. only for cold start 400 cSt</p> | <p>Pressure hose lance DN18 length 2500 mm DN/OD18 length 400 mm</p> |
| <p>Suction Filter Type Y filtration 500 µm</p> | <p>Weight 14.8 kg</p> |
| <p>Filtration Rating 3, 6, 10, 16, 25 µm $\beta > 1000$ flow through the element Out/In</p> | <p>Equipment Visual clogging indicator (gauge)</p> |
| <p>Bypass valve Δp set Rating 3.5 bar</p> | <p>CE Standard</p> |
| <p>Fluid Temperature From +5 °C to 60 °C</p> | |
| <p>Ambient Temperature From +5 °C to 40 °C</p> | |

The new concept of filtration



ELIXIR® RFX 160 - RETURN FILTER

Lighter, easier to use, and kinder to the environment - MP Filtri's new ELIXIR low pressure concept filters have been specially designed for in-line connections and to handle working pressures up to 1.6 MPa (16 bar).

The cast aluminium head and polyamide design reduces weight by 10% compared to the Spin-on range.

Less waste reduces both your carbon footprint and protects the environment. Replacement is fast and easy, just disassemble the bowl with a 32 mm fixed wrench, take out the FEX filter element and replace.

UFM 015

Designation & Ordering code

MOBILE FILTRATION UNIT UFM 015

| Series | Configuration example: | UFM | 015 | M | A | 1 | 0 | 0 | 0 | P01 |
|--|---|-----|-----|---|---|---|---|---|---|-----|
| UFM | | | | | | | | | | |
| Size | | | | | | | | | | |
| 015 | 15 l/min | | | | | | | | | |
| Electric motor | | | | | | | | | | |
| M | 230 V single phase | | | | | | | | | |
| Seals | | | | | | | | | | |
| A | NBR | | | | | | | | | |
| Pressure gauges and Clogging indicators (see below) | | | | | | | | | | |
| 1 | Manometer (*) | | | | | | | | | |
| Filter element | | | | | | | | | | |
| 0 | Without element (for ordering, see page 26) | | | | | | | | | |
| Filtration surface | | | | | | | | | | |
| 0 | Not provided | | | | | | | | | |
| Option | | | | | | | | | | |
| 0 | No options | | | | | | | | | |
| Option | | | | | | | | | | |
| P01 | MP Filtri standard | | | | | | | | | |

Filtration element should be ordered separately

FILTRATION SURFACE - STANDARD

| Inorganic microfibre | Wire mesh element |
|----------------------|---------------------|
| FEX 160 A03 A N P01 | FEX 160 M25 A N P01 |
| FEX 160 A06 A N P01 | FEX 160 M60 A N P01 |
| FEX 160 A10 A N P01 | |
| FEX 160 A16 A N P01 | |
| FEX 160 A25 A N P01 | |

WATER REMOVAL - FILTRATION SURFACE - STANDARD




| Multi-Layer water absorber |
|----------------------------|
| FEX 160 WA025 A N P01 |

CLOGGING INDICATORS (*)

BVA Axial pressure gauge

| Settings | Ordering code |
|-------------------|---------------|
| 2.5 bar \pm 10% | BVA 25 P01 |

Dimensions

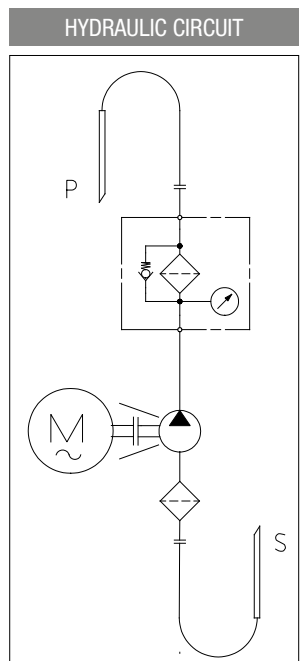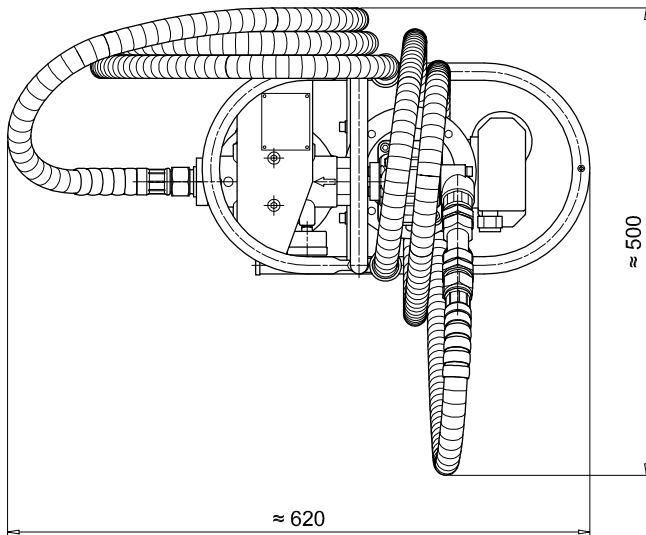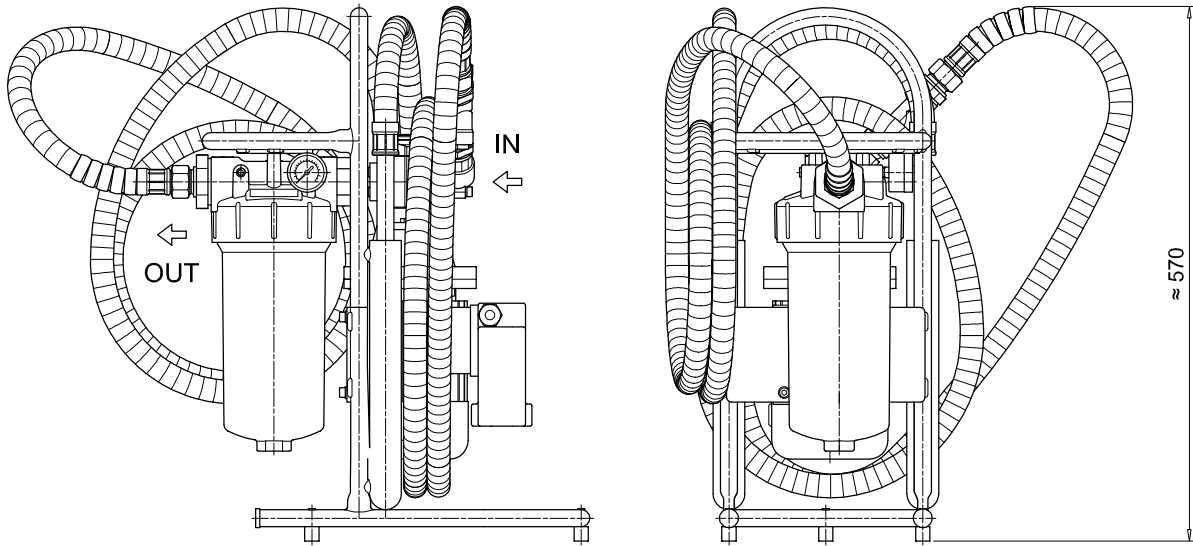

Designation & Ordering code

COMPLETE BODY

Configuration example : **RFEX160** **E** **A** **B** **6** **P01**

Series and size
RFEX160

Bypass valve
S Without bypass
E 3 bar

Seals and treatments
A NBR

Connections
B G 1 1/4"

Connection for clogging indicator
6 With plugged connections

Execution
P01 MP Filtri standard

FILTER ELEMENT

Configuration example: **FEX160** **A10** **A** **P01**


Element series and size
FEX160

| Filtration rating | |
|---------------------------------------|--|
| A03 Inorganic microfiber 3 µm | M25 Wire mesh 25 µm |
| A06 Inorganic microfiber 6 µm | M60 Wire mesh 60 µm |
| A10 Inorganic microfiber 10 µm | M90 Wire mesh 90 µm |
| A16 Inorganic microfiber 16 µm | P10 Resin impregnated paper 10 µm |
| A25 Inorganic microfiber 25 µm | P25 Resin impregnated paper 25 µm |


Seals and treatments
A NBR

Execution
P01 MP Filtri standard



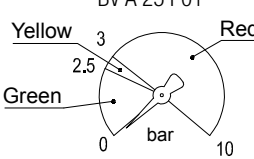
Dimensions

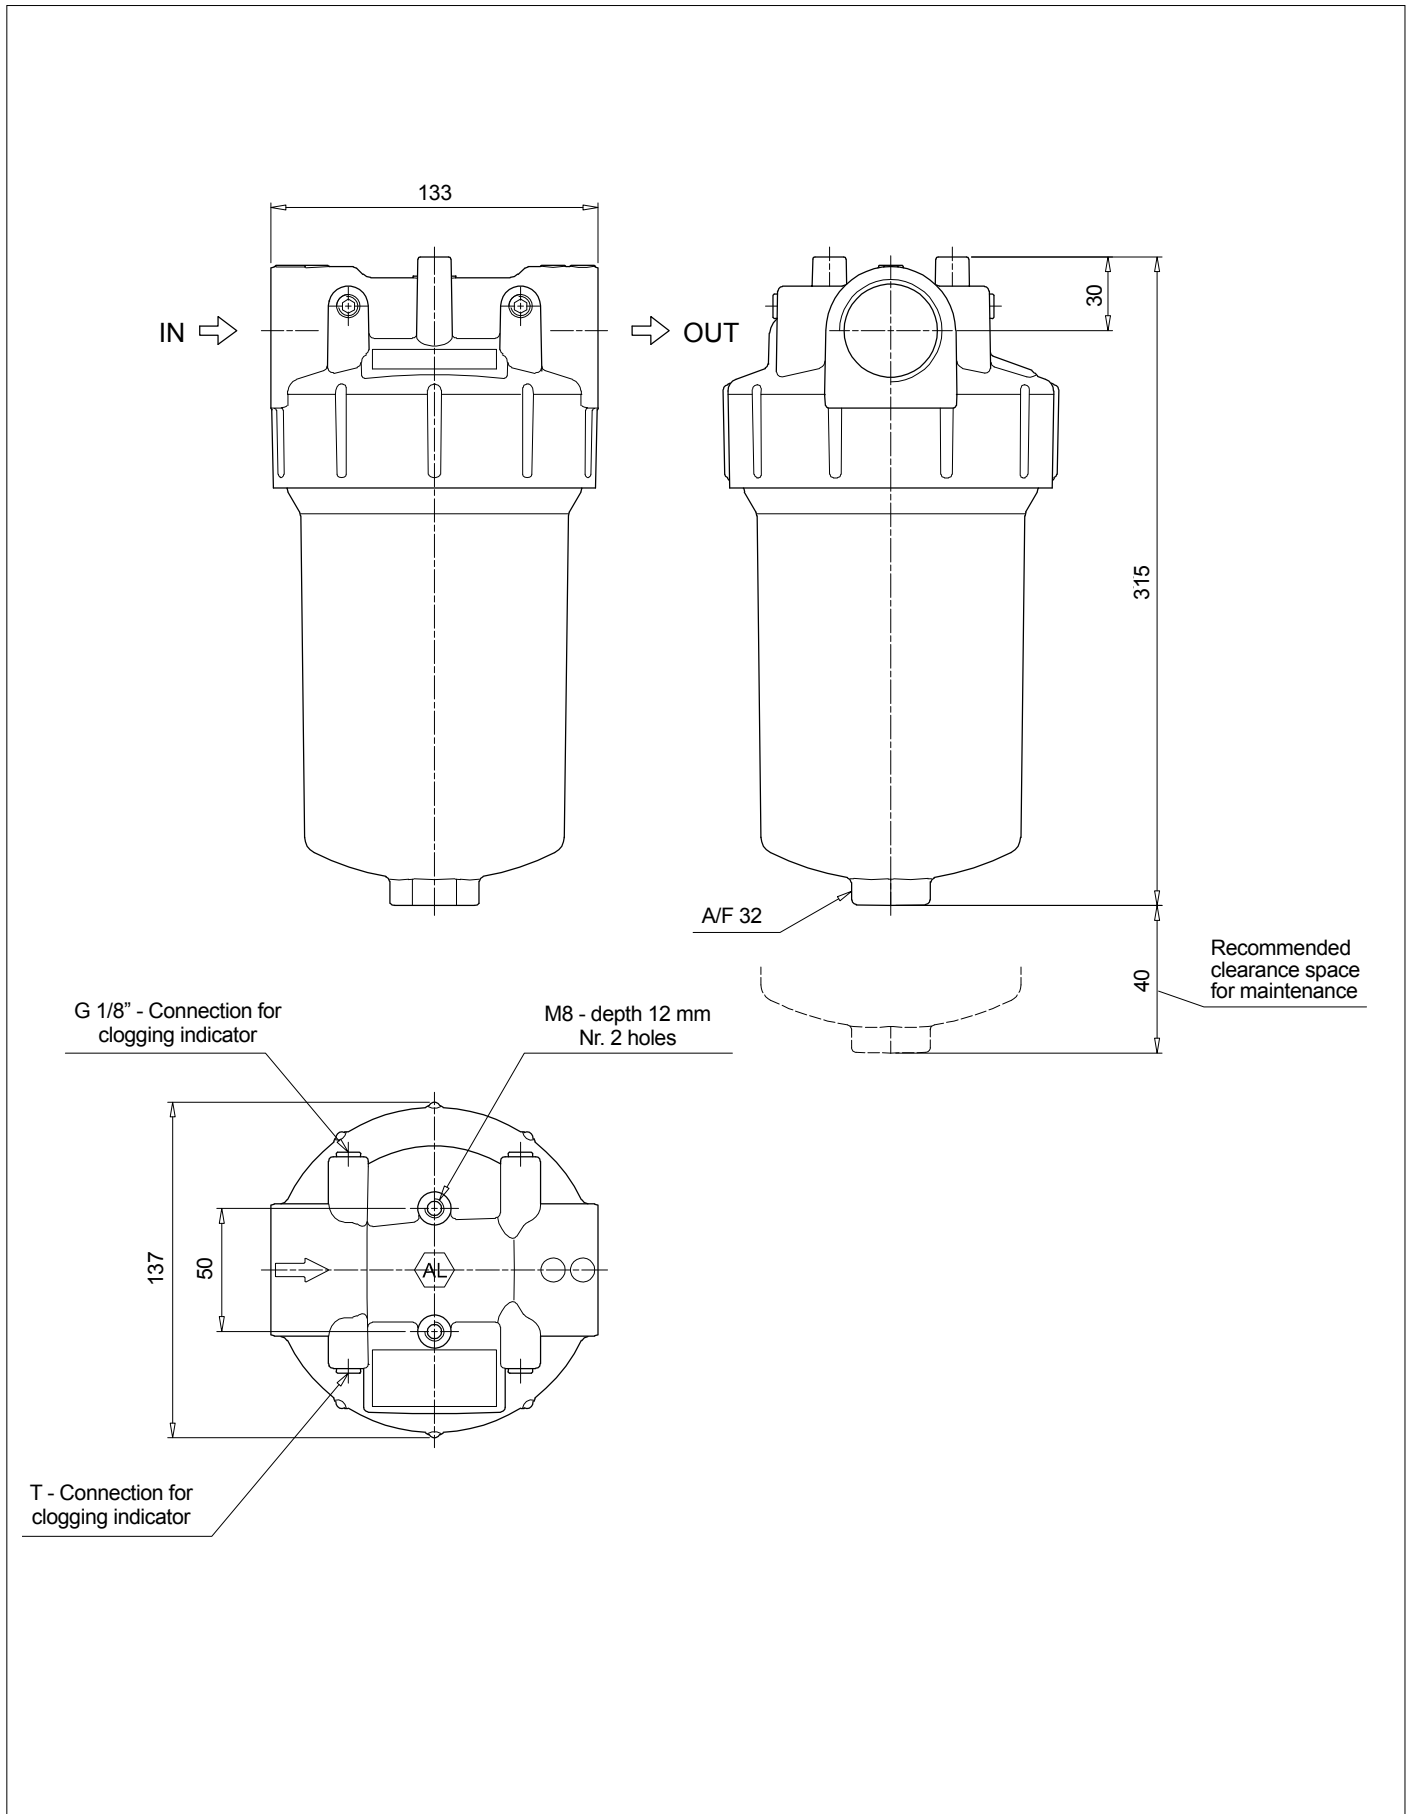

Order number for spare parts

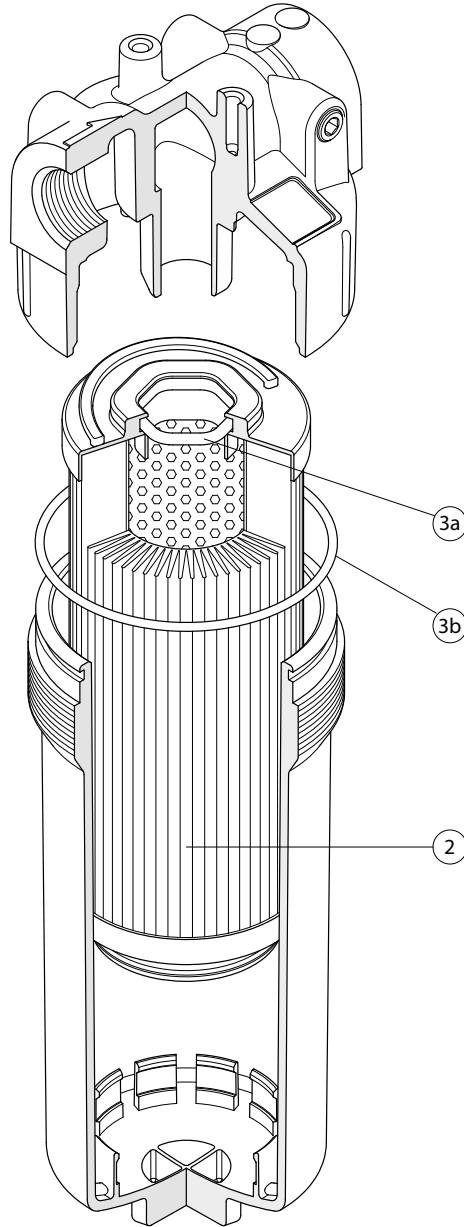

| Item: | Q.ty: 1 pc. | Q.ty: 1 pc. |
|-----------------|-----------------|--------------------------|
| | 2 | 3 (3a ÷ 3b) |
| Filter series | Filter element | Seal Kit code number NBR |
| RFEX 160 | See order table | 02050772 |
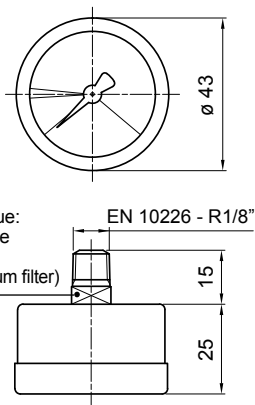
| BVA | |
|---|---------------|
| Axial Pressure Gauge | |
| Settings | Ordering code |
| 2.5 bar $\pm 10\%$ | BV A 25 P01 |
| <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>A/F 11 Max tightening torque: 3 N·m (on polyamide filter cover) 6.5 N·m (on aluminium filter)</p>  </div> <div style="width: 45%;"> <p style="text-align: center;">Hydraulic symbol</p>  <p style="text-align: center;">Dial scale</p> <p style="text-align: center;">BV A 25 P01</p>  </div> </div> | |
| <p>Materials</p> <ul style="list-style-type: none"> - Case: Painted Steel - Window: Transparent plastic - Dial: Painted Steel - Pointer: Painted Aluminium - Pressure connection: Brass - Pressure element: Bourdon tube Cu-alloy soft soldered | |
| <p>Technical data</p> <ul style="list-style-type: none"> - Max working pressure: Static: 7 bar Fluctuating: 6 bar Short time: 10 bar - Working temperature: From -40 °C to +60 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Accuracy: Class 2.5 according to EN 13190 - Degree of protection: IP31 according to EN 60529 | |

UFM 041

Mobile filtration unit 34 l/min flow rate




Description

Mobile filtration units

UFM 041 mobile filtration units suitable for filling and refilling of filtered hydraulic fluids and lubrication tanks.

The filter unit connected to off-line to the tank (recommended maximum volume of 350/500 L.), can be used as a support to the filtration plant on start-up for fast flushing action, either as additional filtration systems with a high incidence of contamination.

Continued use is recommended for the version with three phase electric motor.



> Features & Benefits

- Compact size
- Light
- Easy to use
- Easy maintenance
- Reliable
- Absolute filtration



Technical data

Pump

Gear pump

Electric Motor

0.75 kW 230 V single phase electric motor

0.75 kW 400/230 V three phase electric motor

Flow (l/min)

34 l/min - 1450 r.p.m.

Max. Operation Pressure

5.0 bar

Viscosity range

Min. operation 10 cSt

Max. operation 200 cSt

Max. only for cold start 800 cSt

Suction Filter

Type Y filtration 350 µm

Filtration Rating

1, 3, 6, 10, 25 µm $\beta > 1000$ flow through the element In/Out

Bypass valve Δp set

Rating 3 bar

Fluid Temperature

From -10 °C to +80 °C

Ambient Temperature

From -20 °C to +45 °C

Protection Class

IP55

Seal

NBR

Fluid Compatibility

Mineral Oil & Synthetic Oil - Other on request

Suction hose

DN25 length 3000 mm

lance

DN/OD25 length 700 mm

Pressure hose

DN20 length 3000 mm

lance

DN/OD20 length 700 mm

Weight

45 kg

Equipment

Visual clogging indicator (gauge)

 Standard

UFM 041

Designation & Ordering code

| MOBILE FILTRATION UNIT UFM 041 | | | | | | | | | | |
|---|--|--|--|--|--|--|--|--|--|--|
| Series UFM | Configuration example: UFM 041 T A 1 0 1 0 P01 | | | | | | | | | |
| Size 041 34 l/min | | | | | | | | | | |
| Electric motor M 230 V single phase T 400/230 V three phase | | | | | | | | | | |
| Seals A NBR | | | | | | | | | | |
| Pressure gauges and Clogging indicators (see below) 1 Manometer (*) | | | | | | | | | | |
| Filter element 0 Without element (for ordering, see below) | | | | | | | | | | |
| Filtration surface 1 Standard | | | | | | | | | | |
| Option 0 No options | | | | | | | | | | |
| Option P01 MP Filtri standard Pxx Customized | | | | | | | | | | |




Filtration element should be ordered separately

| FILTRATION SURFACE - STANDARD | | WATER REMOVAL |
|-------------------------------|--------------------------|-----------------------------------|
| Inorganic microfibre | Wire mesh element | Multi-Layer water absorber |
| MR 250 4 A01 A P01 | MR 250 4 M25 A P01 | MR2504WA025AP01 |
| MR 250 4 A03 A P01 | MR 250 4 M60 A P01 | |
| MR 250 4 A06 A P01 | | |
| MR 250 4 A10 A P01 | | |
| MR 250 4 A16 A P01 | | |
| MR 250 4 A25 A P01 | | |


CLOGGING INDICATORS (*)

| | |
|---------------------------------|-------------------------------------|
| BVA Axial pressure gauge | |
| Settings 2.5 bar ±10% | Ordering code BV A 25 P01 |

Dimensions

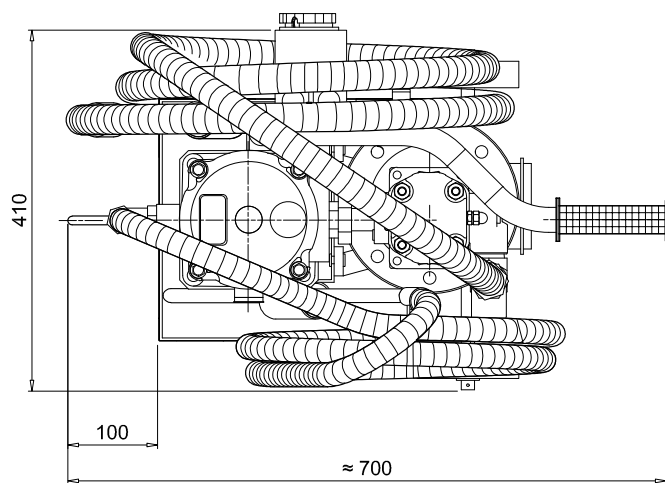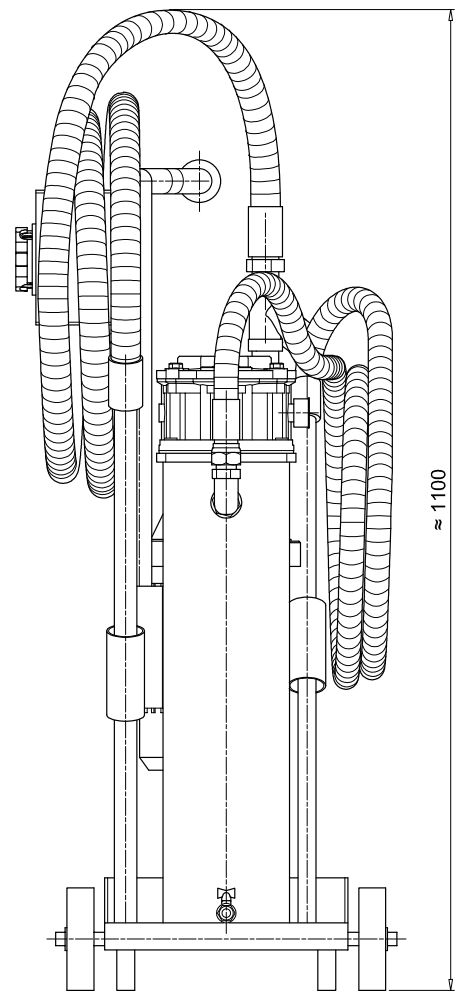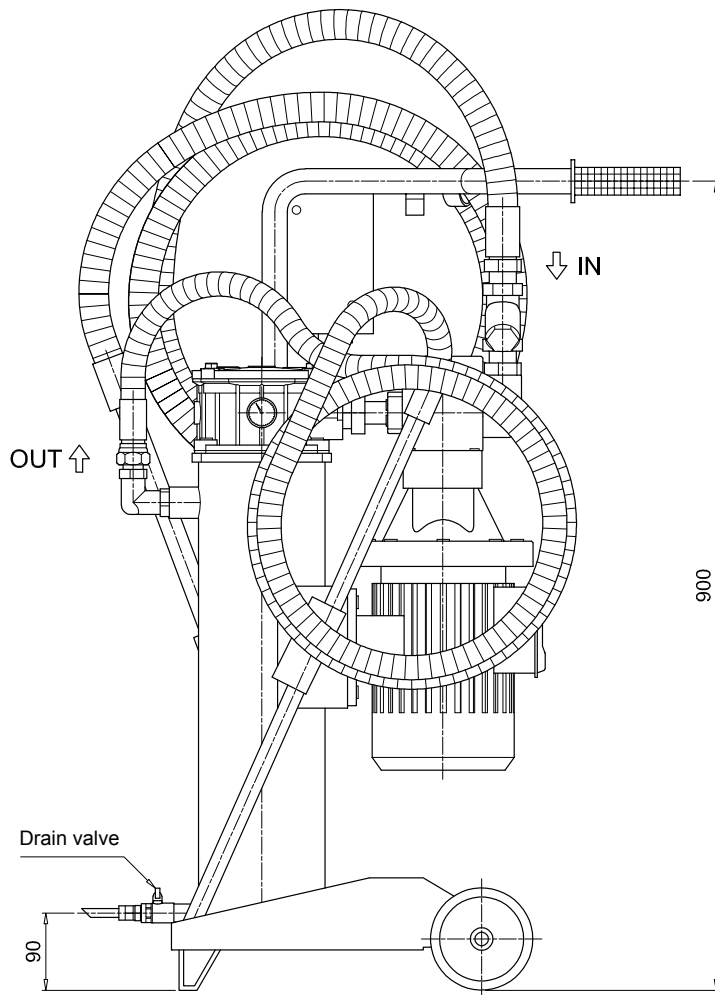

HYDRAULIC CIRCUIT

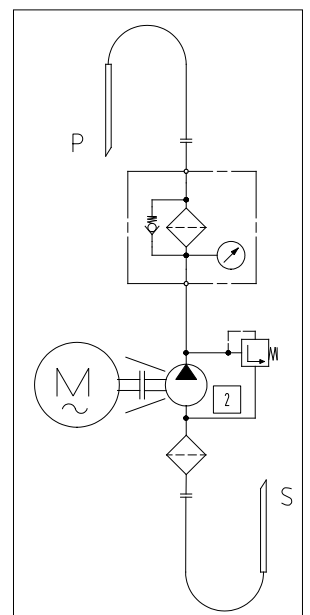

UFM 051

Mobile filtration unit 50 l/min flow rate




Description

Mobile filtration units

UFM 051 mobile filtration units suitable for filling and refilling of filtered hydraulic fluids and lubrication tanks.

The filter unit connected to off-line to the tank (recommended maximum volume of 500/750 L.), can be used as a support to the filtration plant on start-up for fast flushing action, either as additional filtration systems with a high incidence of contamination.

Continued use is recommended for the version with three phase electric motor.



> Features & Benefits

- Compact size
- Continue Operation Pressure 10 bar
- Easy to use
- Easy maintenance
- Reliable
- Absolute filtration
- In-line Contamination Monitor

Available in three configurations:

- configuration with start / stop differential pressure indicator - visual
- configuration with start / stop automatic motor
- cut-out from differential pressure indicator - electrical / visual
- configuration with start / stop phase inverter automatic motor
- cut-out from differential pressure indicator - electrical / visual
- in-line Particle Counter ICM



Technical data

Pump

Gear pump

Electric Motor

1.5 kW 230 V single phase electric motor
1.5 kW 400/230 V three phase electric motor with ICM 2.0

Flow (l/min)

50 l/min - 1450 r.p.m.

Max. Operation Pressure

10 bar

Viscosity range

Min. operation 10 cSt
Max. operation 300 cSt
Max. only for cold start 800 cSt

Suction Filter

Type Y filtration 800 µm

Filtration Rating

1, 3, 6, 10, 25 µm $\beta > 1000$ flow through the element Out/In

Bypass valve Δp set

Rating 3.5 bar
The bypass can be blocked through the spigot

Fluid Temperature

From -10 °C to +80 °C

Ambient Temperature

From -20 °C to +45 °C

Protection Class

IP55

Fluid Compatibility

Mineral Oil & Synthetic Oil - Other on request

Suction hose

DN32 length 3000 mm

lance

DN/OD42 length 700 mm

Pressure hose

DN25 length 3000 mm

lance

DN/OD30 length 700 mm

Weight

70 kg

Equipment

- Differential Clogging indicator - Visual (setting 3.0 bar $\pm 10\%$)
- Differential Clogging indicator - Electrical / Visual (setting 3.0 bar $\pm 10\%$)
- Differential Clogging indicator - Electrical / Visual - with ICM 2.0 (setting 3.0 bar $\pm 10\%$)

CE Standard

UFM 051

Designation & Ordering code

MOBILE FILTRATION UNIT UFM 051

| | | | | | | | | | | | |
|--|--|--|-------------------------|---|--|--|--|--|--|--|--|
| Series | Configuration example: UFM 051 T A 2 0 1 0 P01 | | | | | | | | | | |
| UFM | | | | | | | | | | | |
| Size | 051 50 l/min | | | | | | | | | | |
| Electric motor | M 230 V Single phase T 400/230 V Three phase | | | | | | | | | | |
| Seals | A NBR | | | | | | | | | | |
| Pressure gauges and clogging indicators (see below) | | | particle counter option | | | | | | | | |
| | | | 0 | 1 | | | | | | | |
| 2 | Manometer (*) + Visual diff. clogging indicator | | • | - | | | | | | | |
| 3 | Manometer (*) + Electrical diff. clogging indicator (visual indication on panel) | | • | • | | | | | | | |
| Filter element | 0 Without element (for ordering, see below) | | | | | | | | | | |
| Filtration surface | 1 Standard 2 Higher | | | | | | | | | | |
| Particle counter option | | | Electric motor | | | | | | | | |
| | | | M | T | | | | | | | |
| 0 | Without ICM | | • | • | | | | | | | |
| 1 | With ICM 2.0 | | • | • | | | | | | | |
| | Option | | | | | | | | | | |
| | P01 MP Filtri standard | | | | | | | | | | |
| | Pxx Customized | | | | | | | | | | |

Filtration element should be ordered separately

FILTRATION SURFACE 1 - STANDARD

| Inorganic microfibre |
|----------------------|
| CU 400 5 A01 A N P01 |
| CU 400 5 A03 A N P01 |
| CU 400 5 A06 A N P01 |
| CU 400 5 A10 A N P01 |
| CU 400 5 A16 A N P01 |
| CU 400 5 A25 A N P01 |

Wire mesh element

| |
|----------------------|
| CU 400 5 M25 A N P01 |
| CU 400 5 M60 A N P01 |

WATER REMOVAL

Multi-Layer water absorber

CU4005WA025ANP01

FILTRATION SURFACE 2 - HIGHER

| Inorganic microfibre |
|----------------------|
| CU 400 6 A01 A N P01 |
| CU 400 6 A03 A N P01 |
| CU 400 6 A06 A N P01 |
| CU 400 6 A10 A N P01 |
| CU 400 6 A16 A N P01 |
| CU 400 6 A25 A N P01 |

Wire mesh element

| |
|----------------------|
| CU 400 6 M25 A N P01 |
| CU 400 6 M60 A N P01 |

WATER REMOVAL

Multi-Layer water absorber

CU4006WA025ANP01

CLOGGING INDICATORS (*)

DVM Visual Differential Indicator




| Settings | Ordering code |
|--------------|---------------|
| 3.0 bar ±10% | DV M 30 P01 |

DEA Electrical Differential Indicator (visual indication on panel)


| Settings | Ordering code |
|--------------|---------------|
| 3.0 bar ±10% | DE A 30 P01 |

Dimensions

| Filter length | H1 [mm] |
|---------------|---------------|
| 1 | 1230 standard |
| 2 | 1530 higher |

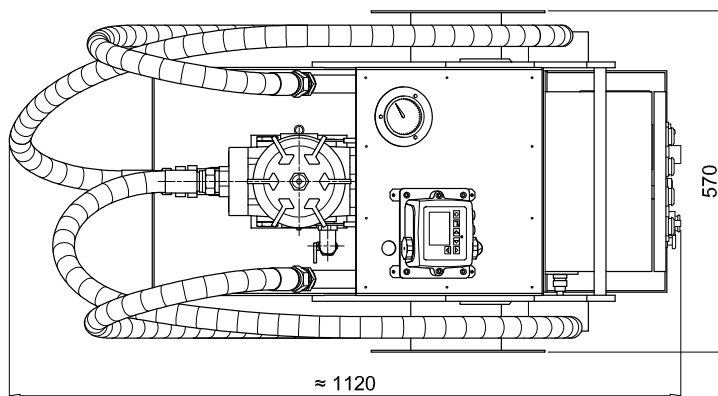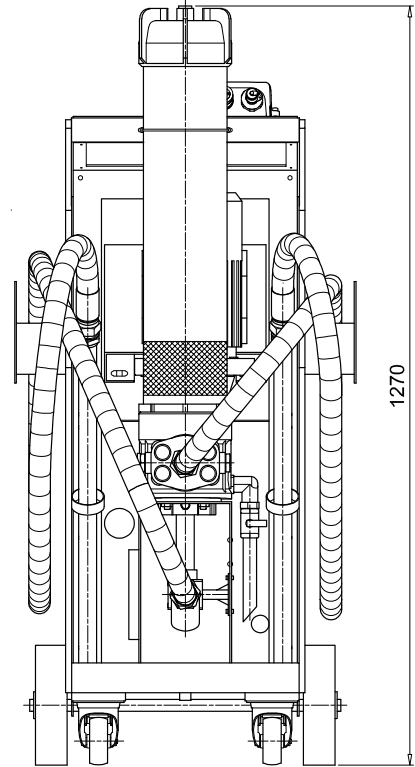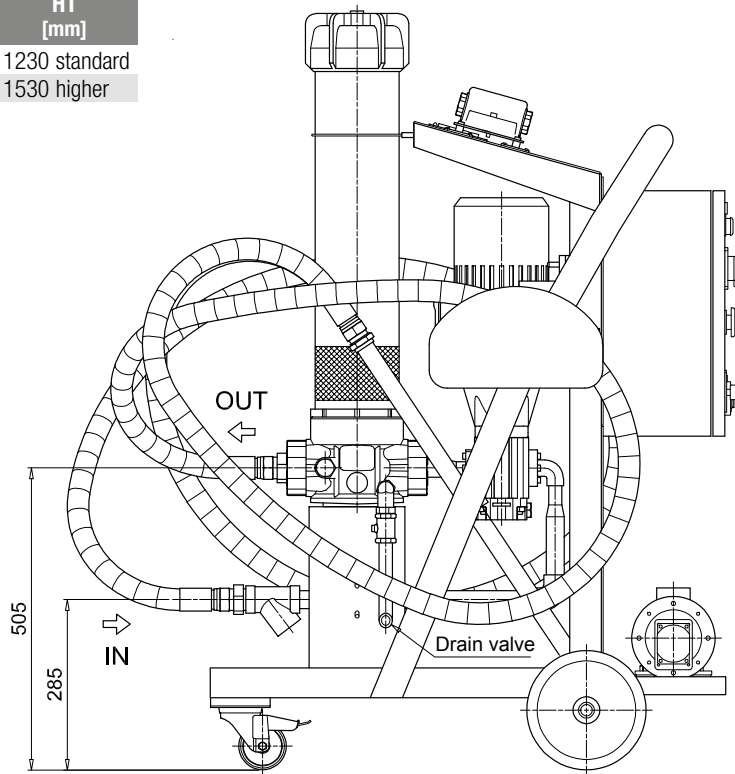

HYDRAULIC CIRCUIT

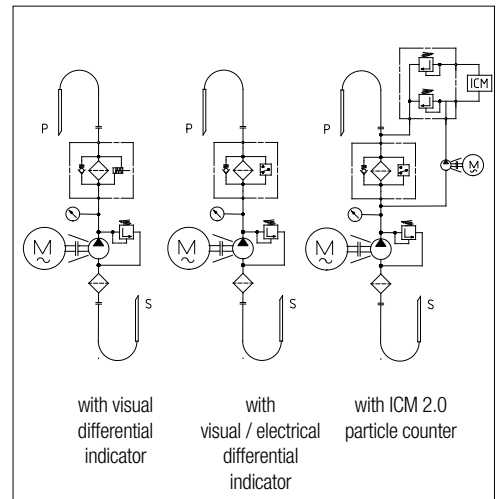

UFM 091

Mobile filtration unit 90 l/min flow rate




Description

Mobile filtration units

UFM 091 mobile filtration units suitable for filling and refilling of filtered hydraulic fluids and lubrication tanks.

The filter unit connected to off-line to the tank, can be used as a support to the filtration plant on start-up for fast flushing action, either as additional filtration systems with a high incidence of contamination.

Recommended maximum tank volume of 1500/1800L.



> Features & Benefits

- Compact size
- High flow
- Continue Operation Pressure 10 bar
- Easy to use
- Easy maintenance
- Reliable
- Absolute filtration
- In-line Contamination Monitor

Available in three configurations:

- configuration with start / stop differential pressure indicator - visual
- configuration with start / stop automatic motor
- cut-out from differential pressure indicator - electrical / visual
- configuration with start / stop phase inverter automatic motor
- cut-out from differential pressure indicator - electrical / visual
- in-line Particle Counter ICM



Technical data

| | |
|---|---|
| <p>Pump Screw pump</p> | <p>Protection Class IP55</p> |
| <p>Electric Motor 2.2 kW 400/230V three phase 4-pole</p> | <p>Seal NBR</p> |
| <p>Flow (l/min) 90 l/min - 1450 r.p.m.</p> | <p>Fluid Compatibility Mineral Oil & Synthetic Oil - Water Glycol</p> |
| <p>Max. Operation Pressure 10 bar</p> | <p>Suction hose lance DN50 length 3000 mm DN/OD50 length 700 mm</p> |
| <p>Viscosity range Min. operation 10 cSt Max. operation 800 cSt Max. only for cold start 2000 cSt</p> | <p>Pressure hose lance DN38 length 3000 mm DN/OD42 length 700 mm</p> |
| <p>Suction Filter Type Y filtration 800 µm</p> | <p>Weight 105 kg</p> |
| <p>Filtration Rating 1, 3, 6, 10, 25 µm $\beta > 1000$ flow through the element Out/In</p> | <p>Equipment - Differential Clogging indicator - Visual (setting 3.0 bar $\pm 10\%$) - Differential Clogging indicator - Electrical / Visual (setting 3.0 bar $\pm 10\%$) - Differential Clogging indicator - Electrical / Visual - with ICM 2.0 (setting 3.0 bar $\pm 10\%$)</p> |
| <p>Bypass valve Δp set Rating 3.5 bar with bypass. The bypass can be blocked through the spigot</p> | <p>CE Standard</p> |
| <p>Fluid Temperature From -10 °C to +80 °C</p> | |
| <p>Ambient Temperature From -20 °C to +45 °C</p> | |

Designation & Ordering code

MOBILE FILTRATION UNIT UFM 091

| Series | Configuration example: | UFM | 091 | T | A | 2 | 0 | 2 | 0 | P01 |
|--|--|-----|-----|---|---|---|---|---|---|-----|
| UFM | | | | | | | | | | |
| Size | | | | | | | | | | |
| 091 | 90 l/min | | | | | | | | | |
| Electric motor | | | | | | | | | | |
| T | 400/230 V Three phase | | | | | | | | | |
| Seals | | | | | | | | | | |
| A | NBR | | | | | | | | | |
| Pressure gauges and Clogging indicators (see below) | | | | | | | | | | |
| 2 | Manometer (*) + Visual differential clogging indicator | | | | | | | | | |
| 3 | Manometer (*) + Electrical diff. clogging indicator (visual indication on panel) | | | | | | | | | |
| Filter element | | | | | | | | | | |
| 0 | Without element (for ordering, see below) | | | | | | | | | |
| Filtration surface | | | | | | | | | | |
| 2 | Higher | | | | | | | | | |
| Option | | | | | | | | | | |
| 0 | No options | | | | | | | | | |
| 1 | ICM 2.0 particle counter | | | | | | | | | |
| Option | | | | | | | | | | |
| P01 | MP Filtri standard | | | | | | | | | |
| Pxx | Customized | | | | | | | | | |

Filtration element should be ordered separately

FILTRATION SURFACE - HIGHER

| Inorganic microfibre | Wire mesh element |
|----------------------|----------------------|
| CU 400 6 A01 A N P01 | CU 400 6 M25 A N P01 |
| CU 400 6 A03 A N P01 | CU 400 6 M60 A N P01 |
| CU 400 6 A06 A N P01 | |
| CU 400 6 A10 A N P01 | |
| CU 400 6 A16 A N P01 | |
| CU 400 6 A25 A N P01 | |

WATER REMOVAL

| Multi-Layer water absorber |
|----------------------------|
| CU4006WA025ANP01 |

CLOGGING INDICATORS (*)


DVM Visual Differential Indicator

| Settings | Ordering code |
|--------------|---------------|
| 3.0 bar ±10% | DV M 30 P01 |

DEA Electrical Differential Indicator (visual indication on panel)

| Settings | Ordering code |
|--------------|---------------|
| 3.0 bar ±10% | DE A 30 P01 |

Dimensions

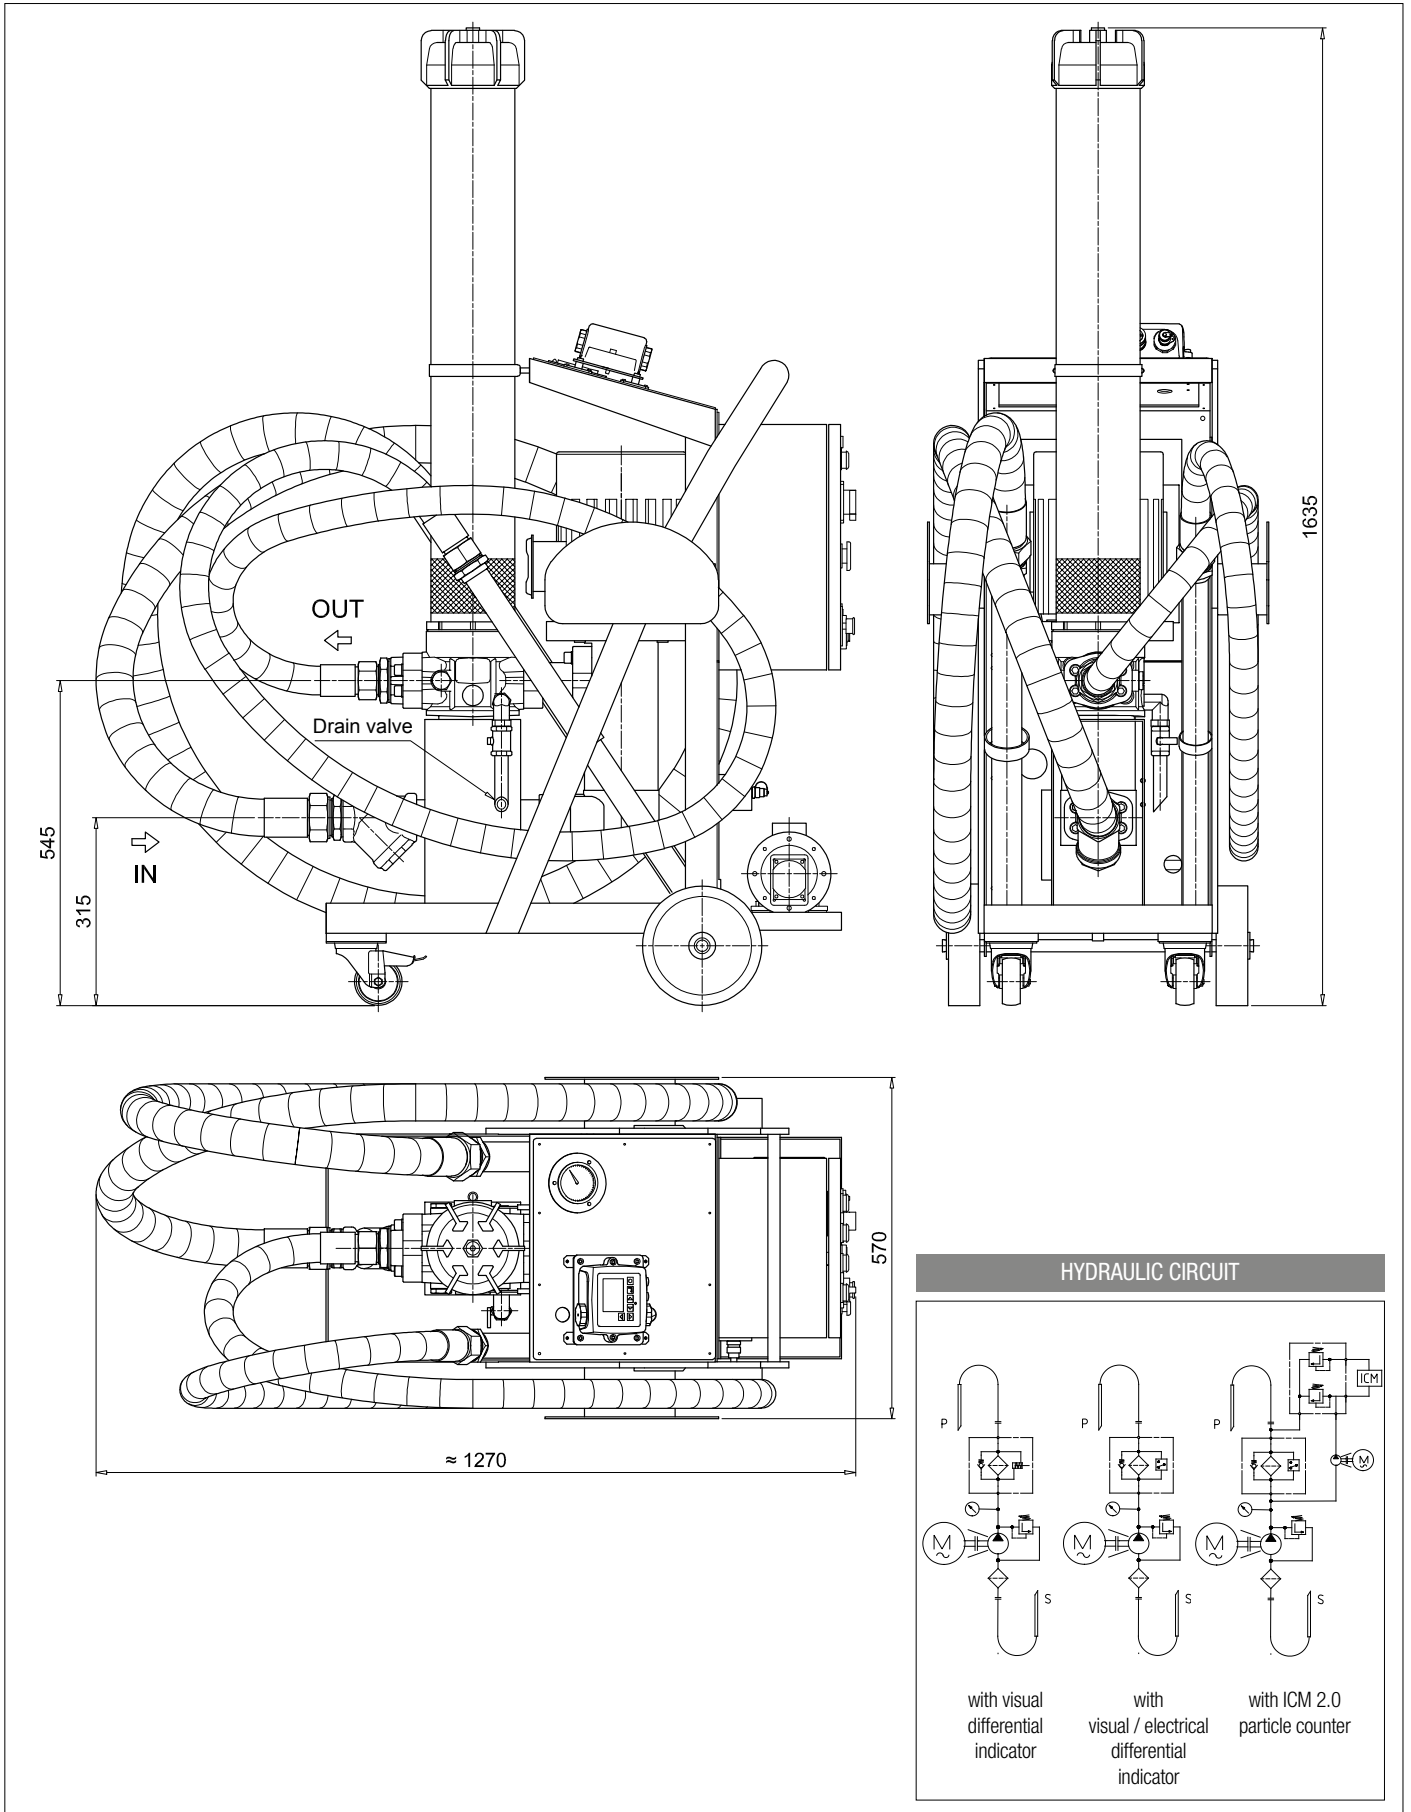

UFM 181

Mobile filtration unit 180 l/min flow rate




Description

Mobile filtration units

UFM 181 mobile filtration units suitable for filling and refilling of filtered hydraulic fluids and lubrication tanks.

The filter unit connected to off-line to the tank, can be used as a support to the filtration plant on start-up for fast flushing action, either as additional filtration systems with a high incidence of contamination.

Recommended maximum tank volume of 1800/2700 L.



> Features & Benefits

- Compact size
- High flow
- Continue Operation Pressure 10 bar
- Easy to use
- Easy maintenance
- Reliable
- Absolute filtration
- In-line Contamination Monitor

Available in two configurations:

- configuration with start / stop automatic motor
- cut-out from differential pressure indicator - electrical / visual
- configuration with start / stop phase inverter automatic motor
- cut-out from differential pressure indicator - electrical / visual
- in-line Particle Counter ICM



Technical data

| | |
|---|--|
| <p>Pump Screw pump</p> | <p>Protection Class IP55</p> |
| <p>Electric Motor 4 kW 400/230V three phase 2-pole</p> | <p>Seal NBR</p> |
| <p>Flow (l/min) 180 l/min - 2900 r.p.m.</p> | <p>Fluid Compatibility Mineral Oil & Synthetic Oil - Water Glycol</p> |
| <p>Max. Operation Pressure 10 bar</p> | <p>Suction hose lance DN50 length 3000 mm DN/OD50 length 700 mm</p> |
| <p>Viscosity range Min. operation 10 cSt Max. operation 800 cSt Max. only for cold start 2000 cSt</p> | <p>Pressure hose lance DN38 length 3000 mm DN/OD42 length 700 mm</p> |
| <p>Suction Filter Type Y filtration 800 µm</p> | <p>Weight 109 kg</p> |
| <p>Filtration Rating 1, 3, 6, 10, 25 µm $\beta > 1000$ flow through the element Out/In</p> | <p>Equipment - Differential Clogging indicator - Electrical / Visual (setting 3.0 bar $\pm 10\%$) - Differential Clogging indicator - Electrical / Visual - with ICM 2.0 (setting 3.0 bar $\pm 10\%$)</p> |
| <p>Bypass valve Δp set Rating 3.5 bar with bypass. The bypass can be blocked through the spigot</p> | <p>CE Standard</p> |
| <p>Fluid Temperature From -10 °C to +80 °C</p> | |
| <p>Ambient Temperature From -20 °C to +45 °C</p> | |

UFM 181

Designation & Ordering code

| MOBILE FILTRATION UNIT UFM 181 | | | | | | | | | | |
|--|------------------------|-----|-----|---|---|---|---|---|---|-----|
| Series UFM | Configuration example: | UFM | 181 | T | A | 3 | 0 | 2 | 0 | P01 |
| Size 181 180 l/min | | | | | | | | | | |
| Electric motor T 400/230 V Three phase | | | | | | | | | | |
| Seals A NBR | | | | | | | | | | |
| Pressure gauges and Clogging indicators (see below) 3 Manometer (*) + Electrical diff. clogging indicator (visual indication on panel) | | | | | | | | | | |
| Filter element 0 Without element (for ordering, see below) | | | | | | | | | | |
| Filtration surface 2 Higher | | | | | | | | | | |
| Option 0 No options 1 ICM 2.0 particle counter | | | | | | | | | | |
| Option P01 MP Filtri standard Pxx Customized | | | | | | | | | | |

Filtration element should be ordered separately


| FILTRATION SURFACE - HIGHER | | WATER REMOVAL |
|-----------------------------|----------------------|----------------------------|
| Inorganic microfibre | Wire mesh element | Multi-Layer water absorber |
| CU 400 6 A01 A N P01 | CU 400 6 M25 A N P01 | CU4006WA025ANP01 |
| CU 400 6 A03 A N P01 | CU 400 6 M60 A N P01 | |
| CU 400 6 A06 A N P01 | | |
| CU 400 6 A10 A N P01 | | |
| CU 400 6 A16 A N P01 | | |
| CU 400 6 A25 A N P01 | | |

CLOGGING INDICATORS (*)

DEA Electrical Differential Indicator (visual indication on panel)

| Settings | Ordering code |
|--------------|---------------|
| 3.0 bar ±10% | DE A 30 P01 |

Dimensions

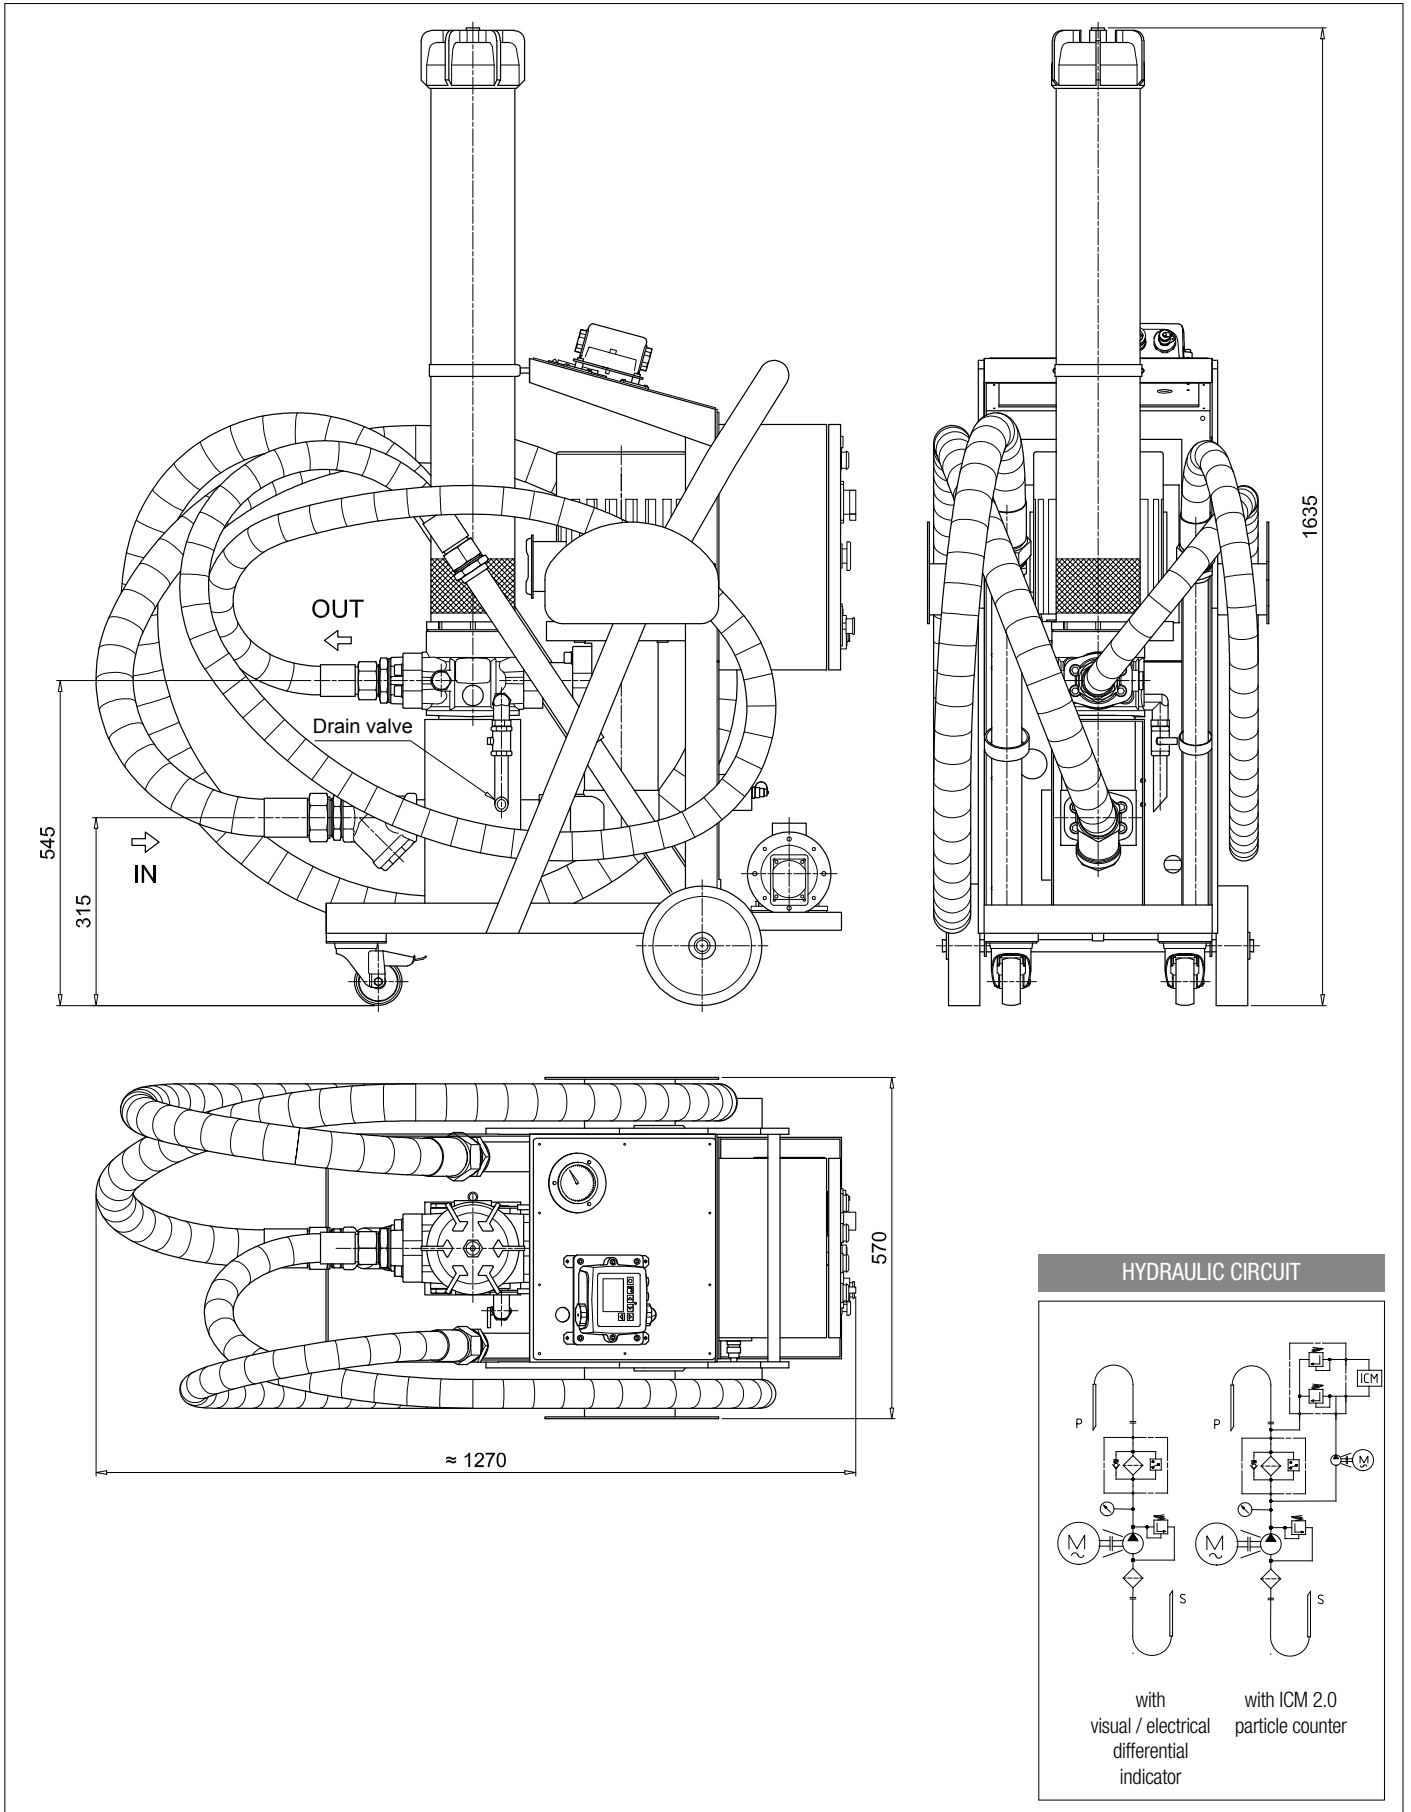

UFM 919

Mobile filtration unit 90/180 l/min flow rate




Description

Mobile filtration units

UFM 919 mobile filtration units suitable for filling and refilling of filtered hydraulic fluids and lubrication tanks.

The filter unit connected to off-line to the tank, can be used as a support to the filtration plant on start-up for fast flushing action, either as additional filtration systems with a high incidence of contamination.

Two-speed electric motor with programmable flow of 90 or 180 l/min.

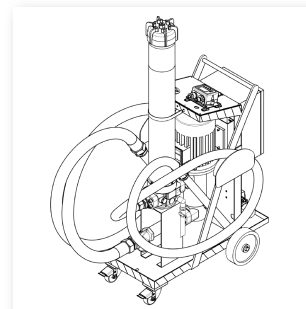

> Features & Benefits

- Compact size
- High flow
- Continue Operation Pressure 10 bar
- Easy to use
- Easy maintenance
- Reliable
- Absolute filtration
- In-line Contamination Monitor

Possible applications

- Flow rate 90 l/min for filling or topping up tanks with a volume of less than 1000 liters
- Flow rate 90 l/min for depollution of tanks with a volume of less than 1000 liters
- Flow rate 90 l / min for the treatment of high viscosity oils
- Flow rate 90 l / min for a cold start phase then flow rate 180 l/min after temperature rise.

- Flow rate 180 l/min for filling or topping up tanks with a volume greater than 2000 liters
- Flow rate 180 l/min for the depollution of tanks with a volume of less than 2000 liters

Available in two configurations:

- configuration with start / stop automatic motor
- cut-out from differential pressure indicator - electrical / visual
- configuration with start / stop phase inverter automatic motor
- cut-out from differential pressure indicator - electrical / visual
- in-line Particle Counter ICM 2.0



Technical data

Pump

Screw pump

Electric Motor

3.7/5 kW 400/230V three phase 2/4-pole

Flow (l/min)

90 l/min - 1450 r.p.m. / 180 l/min - 2900 r.p.m.

Max. Operation Pressure

10 bar

Viscosity range

Min. operation 10 cSt

Max. operation 800 cSt

Max. only for cold start 2000 cSt

Suction Filter

Type Y filtration 800 µm

Filtration Rating

1, 3, 6, 10, 25 µm $\beta > 1000$ flow through the element Out/In

Bypass valve Δp set

Rating 3.5 bar with bypass.

The bypass can be blocked through the spigot

Fluid Temperature

From -10 °C to +80 °C

Ambient Temperature

From -20 °C to +45 °C

Protection Class

IP55

Seal

NBR

Fluid Compatibility

Mineral Oil & Synthetic Oil - Water Glycol

Suction hose

DN50 length 3000 mm

lance

DN/OD50 length 700 mm

lance 90°

DN/OD40 length 700 mm

Pressure hose

DN38 length 3000 mm

lance

DN/OD42 length 700 mm

Weight

120 kg

Equipment

- Differential Clogging indicator - Electrical / Visual (setting 3.0 bar $\pm 10\%$)

- Differential Clogging indicator - Electrical / Visual - with ICM 2.0 (setting 3.0 bar $\pm 10\%$)

CE Standard

Designation & Ordering code

| MOBILE FILTRATION UNIT UFM 919 | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|
| Series UFM | Configuration example: UFM 919 T A 3 0 2 0 P01 | | | | | | | | | |
| Size 919 90-180 l/min | | | | | | | | | | |
| Electric motor T 400/230V Three phase - 2/4 pole | | | | | | | | | | |
| Seals A NBR | | | | | | | | | | |
| Pressure gauges and Clogging indicators (see below) 3 Manometer (*) + Electrical diff. clogging indicator (visual indication on panel) | | | | | | | | | | |
| Filter element 0 Without element (for ordering, see below) | | | | | | | | | | |
| Filtration surface 2 Higher | | | | | | | | | | |
| Option 0 No options 1 ICM 2.0 particle counter | | | | | | | | | | |
| Option P01 MP Filtri standard Pxx Customized | | | | | | | | | | |

Filtration element should be ordered separately


| FILTRATION SURFACE - HIGHER | | WATER REMOVAL |
|-----------------------------|--------------------------|-----------------------------------|
| Inorganic microfibre | Wire mesh element | Multi-Layer water absorber |
| CU 400 6 A01 A N P01 | CU 400 6 M25 A N P01 | CU4006WA025ANP01 |
| CU 400 6 A03 A N P01 | CU 400 6 M60 A N P01 | |
| CU 400 6 A06 A N P01 | | |
| CU 400 6 A10 A N P01 | | |
| CU 400 6 A16 A N P01 | | |
| CU 400 6 A25 A N P01 | | |

CLOGGING INDICATORS (*)

DEA Electrical Differential Indicator (visual indication on panel)

| Settings | Ordering code |
|--------------|---------------|
| 3.0 bar ±10% | DE A 30 P01 |

Dimensions

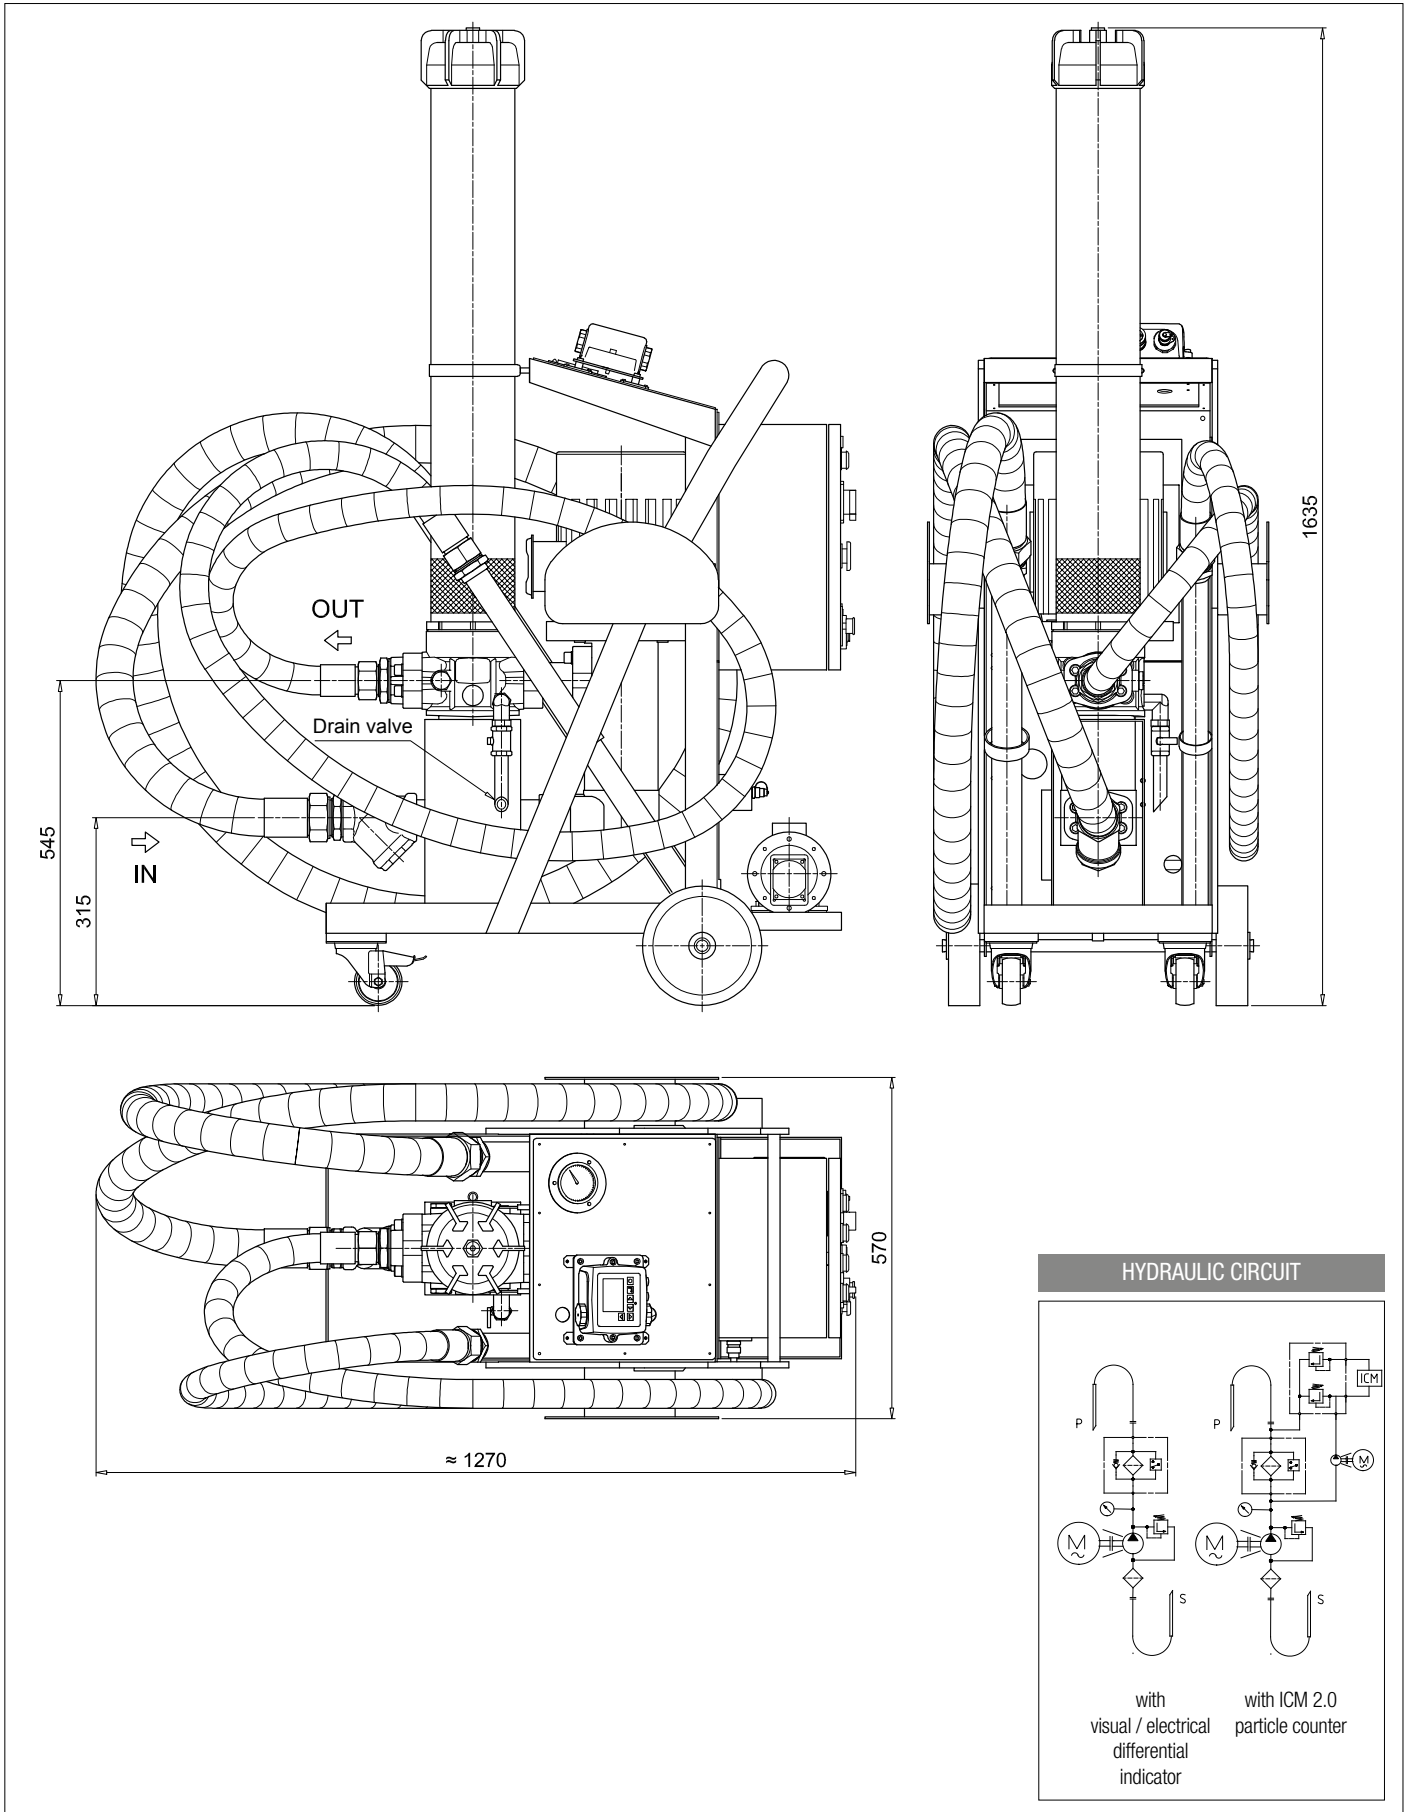

FTU 080

Fluid transfer unit with ICM 2.0 (In-line Contamination Monitor)



Description

Fluid Transfer Unit

FTU 080 Fluid Transfer unit suitable for filling, recirculation - via onboard 80L reservoir - and emptying of filtered hydraulic fluids and lubrication tanks.

The FTU can be utilised either as additional filtration to a system with a high incidence of contamination, or can be used as a standalone recirculating filtration circuit to clean fluid to a predetermined contamination level - monitored by the onboard ICM - prior to transfer of fluid to the system.

> Features & Benefits

- Compact size
- Easy to use
- Easy maintenance
- Reliable
- Absolute filtration
- In-line Contamination Monitor

Possible applications

- Low flow rate for filling of reservoirs
- Low-flow filtration for off-line tanks
- Pre filtration ability of fluid prior to filling of hydraulic system



Technical data

Pump

Gear pump

Electric Motor

0.75 kW 1400 rpm, 110/230 V single phase

Flow (l/min)

15 l/min

Max. Operation Pressure

3.5 bar

Inlet

Inlet (pump protection) filtration steel 250 µm strainer

Viscosity

150 cSt maximum fluid viscosity

Suction Filter

250 µm metal mesh strainers

Bypass valve Δp set

Rating 3.5 bar with bypass

Filtration

Water removal "spin-on" type, bypass set at 1.75 bar.

In-line filtration 3 µm absolute β 1000 element bypass set at 3.0 bar.

Filtration rating

See designation order for cartridge and filter elements

Control

Electrical Control Box

Indicator

Delivery line electric cut out switch

Ambient Temperature

From -10 °C to 80 °C

Working temperature

From 0 °C to 40 °C

Protection Class

IP55

Seal

NBR

Fluid Compatibility

Mineral oil compatible - please contact sales team for queries about other fluids

Hoses

Flexible hoses - SAE100R4 1" BSP swaged females 2mtr long hose

Oil level

Sight glass and filler with integrated electric float cut out switch

Weight

200 kg

Mounting

Heavy duty trolley and wheels

CE Standard

Designation & Ordering code

| FLUID TRANSFER UNIT FTU | |
|---|---|
| Mobile filtration unit FTU Fluid Transfer Unit | Configuration example: FTU 1 1 15 2 1 M250 SL4305 |
| Onboard reservoir 1 80 litres | |
| In-line contamination monitor 1 With ICM | |
| Flow rate 15 15 l/min | |
| Motor power 2 0.75 kW, 1400 rpm | |
| Vage 1 110 V - 50 Hz single phase 2 240 V - 50 Hz single phase | |
| Inlet filtration M250 250 µm suction strainer (internal of reservoir) | |
| Outlet filtration SL4305 Single spin on plus LMP length 5 | |

Filtration element is not included and should be ordered separately.

Outlet filtration options:

LMP: CU400 5 A03, A06, A10, A16, A25 - **SPIN-ON:** CS150 A03, A06, A10, A25 - CS150 P10, P25 - **WATER REMOVAL:** CW150 P10, P25

CARTRIDGE STANDARD LENGTH

| Inorganic microfibre | Wire mesh element |
|----------------------|-------------------|
| CS 100 A01 A P01 | CS 100 M25 A P01 |
| CS 100 A03 A P01 | CS 100 M60 A P01 |
| CS 100 A06 A P01 | |
| CS 100 A10 A P01 | |
| CS 100 A25 A P01 | |

CARTRIDGE EXTENDED LENGTH



| Inorganic microfibre | Wire mesh element |
|----------------------|-------------------|
| CS 150 A01 A P01 | CS 150 M25 A P01 |
| CS 150 A03 A P01 | CS 150 M60 A P01 |
| CS 150 A06 A P01 | |
| CS 150 A10 A P01 | |
| CS 150 A25 A P01 | |

LMP FILTER ELEMENT - LENGTH 5

| Inorganic microfibre |
|----------------------|
| CU 400 5 A03 A N P01 |
| CU 400 5 A10 A N P01 |
| CU 400 5 A16 A N P01 |
| CU 400 5 A25 A N P01 |

WATER REMOVAL - CARTRIDGE EXTENDED LENGTH

| Multi-Layer water absorber |
|----------------------------|
| CW150P10A |

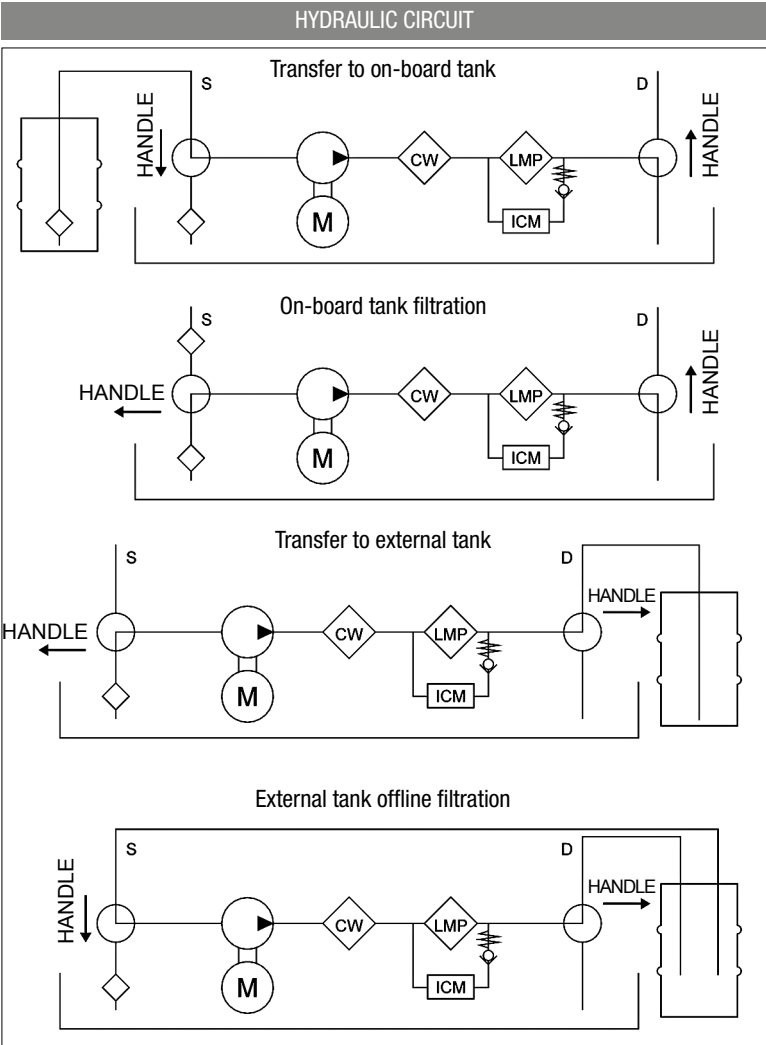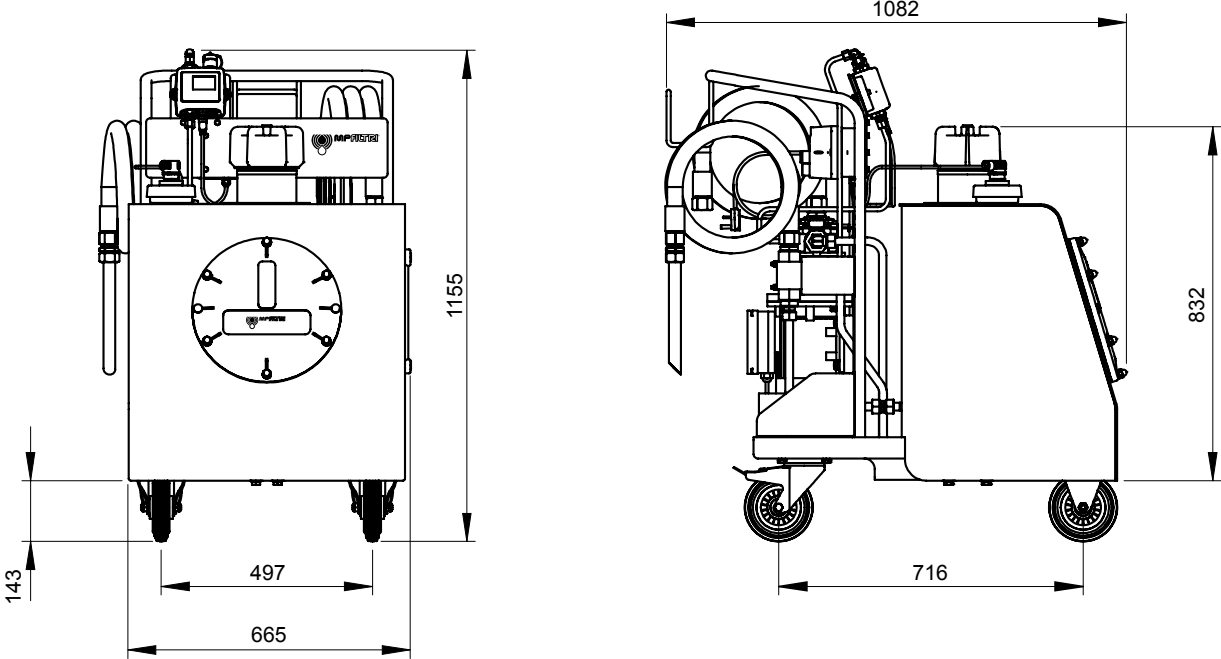

All data, details and words contained in this publication are provided for use by technically qualified personnel at their discretion, without warranty of any kind.

MP Filtri reserves the right to make modifications to the models and versions of the described products at any time for both technical and/or commercial reasons.

For updated information please visit our website: www.mpfiltri.com

The colors and the pictures of the products are purely indicative.

Any reproduction, partial or total, of this document is strictly forbidden.

All rights are strictly reserved



WORLDWIDE NETWORK



CANADA
CHINA
FRANCE
GERMANY
INDIA

RUSSIAN FEDERATION
SINGAPORE
UNITED ARAB EMIRATES
UNITED KINGDOM
USA

PASSION TO PERFORM



mpfiltri.com